

NEMA TYPE "G"

INSTALLATION INSTRUCTIONS



WARNING:

- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Make sure all electrical power is turned off while installing the fixture.
- This luminaire must be adequately grounded for protection against shock hazards and to assure proper operation.
- Disconnect power before servicing.
- LEDs are ESD (Electro Static Discharge) sensitive devices that can be easily damaged if the proper ESD mitigating steps are not taken.
- LEDs are very sensitive to mechanical damage. Caution must be taken to avoid damage to the LEDs.
- ESD or mechanical damage voids all warranties.

FOR USE WITH:


- | | | | |
|----------|----------|----------------------|--------|
| ▪ AP | ▪ DIL | ▪ LPT | ▪ SQR |
| ▪ AT | ▪ EP | ▪ LR4 | ▪ V50 |
| ▪ 50 | ▪ EP AIR | ▪ LT | ▪ VDIL |
| ▪ 50 AIR | ▪ HE3 | ▪ LT – fieldseleCCT® | |
| ▪ 50 IC | ▪ HET | ▪ PT | |
| ▪ CT | ▪ HETL | ▪ PT – fieldseleCCT® | |

TABLE OF CONTENTS

WHAT IS A NEMA "G" (GRID) FIXTURE?.....	1	LT INSTALLATION	2
NEMA TYPE "G" INSTALLATION.....	1	fieldseleCCT INSTALLATION.....	2

WHAT IS A NEMA "G" (GRID) FIXTURE?


All Williams grid fixtures (NEMA Type "G") are designed to fit securely into a standard NEMA Type "G", 1" nominal T-bar system.

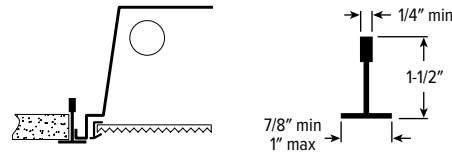

NEMA TYPE "G" INSTALLATION

- STEP 1:** Follow the steps below to install the fixture(s) into a NEMA Type "G" ceiling system:
- Raise the fixture through the ceiling opening and rest the fixture in the grid system.
 - Center the fixture within the opening.
 - Use earthquake clips or integral T-bar clips to secure the fixture to the ceiling structure for added stability.
 - Refer to local codes for other installation requirements.
- STEP 2:** Once the fixture is installed into the ceiling system, follow the steps below to complete necessary electrical connections per NEC and all applicable local electrical codes: See FIG 2.1


FIG 2.1

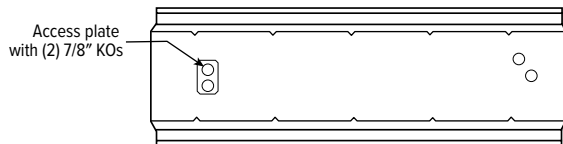

NOTE: Note: Refer to individual product specification sheets for further information.

- STEP 3:** Attach power supply and ground wires using UL listed wire connectors. Ballast disconnect accepts #12 - #16 AWG stranded or solid wire. See FIG 3.1

FIG 3.1

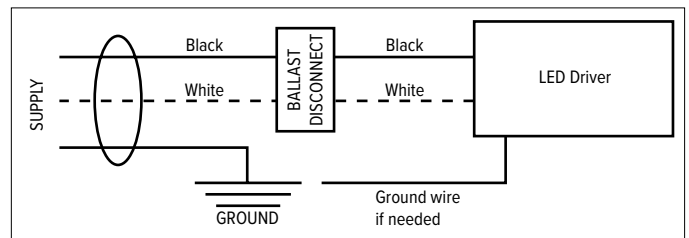

NOTE: Please consult factory for other driver configurations or emergency driver wiring diagrams.


NEMA TYPE "G"

INSTALLATION INSTRUCTIONS

LT INSTALLATION

TO REMOVE LENS: Remove two screws from one end of the fixture, drop out the lens retainer & lens. Reassemble in reverse order.

FIG 3.2

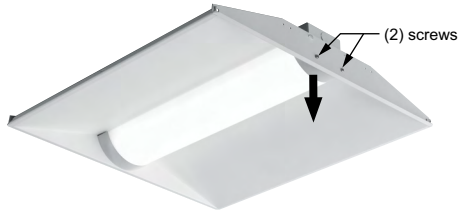

fieldseleCCT INSTALLATION

Set CCT selector switch prior to installing fixture (LT shown)

FIG 3.3



CAUTION: De-energize before switching CCT. Failure to do so may damage the LEDs which will void the warranty.