



IMPORTANT SAFEGUARDS

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- ⚠ WARNING:** FAILURE TO FOLLOW THESE INSTRUCTIONS AND WARNINGS MAY RESULT IN DEATH, SERIOUS INJURY OR SIGNIFICANT PROPERTY DAMAGE- For your protection, read and follow these warnings and instructions carefully before installing or maintaining this equipment. These instructions do not attempt to cover all installation and maintenance situations.
 - ⚠ WARNING:** RISK OF ELECTRIC SHOCK- NEVER CONNECT TO, DISCONNECT FROM, OR SERVICE WHILE EQUIPMENT IS ENERGIZED.
 - ⚠ WARNING:** RISK OF FIRE- Keep combustible material away from hot parts. Observe lamp manufacturer's warnings, recommendations and restrictions on lamp operation and maintenance. Make sure lamps are correctly installed.
 - ⚠ WARNING:** DO NOT USE ABRASIVE MATERIALS OR OTHER SOLVENTS. USE OF THESE SUBSTANCES MAY DAMAGE FIXTURE, WHICH MAY RESULT IN PERSONAL INJURY.
 - ⚠ WARNING:** RISK OF PERSONAL INJURY- This product may have sharp edges. Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing and maintaining this product.
- Before wiring to power supply, turn off electricity at fuse or circuit breaker.
 - Disconnect AC power and unplug battery before servicing.
 - Consult your local building code for approved wiring and installation.
 - UL Damp location listed standard. (0°C- 50°C)
 - Do not let power supply cord touch hot surfaces.
 - Do not mount near gas or electric heater.
 - Do not install a damaged fixture.
 - This product must be installed in accordance with the applicable installation codes and ordinances.
 - All service shall be performed by qualified service personnel. This product must be installed and maintained in accordance with the applicable installation codes by a person familiar with the construction operation of the product and the hazards involved.
 - Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel.
 - The use of accessory equipment is not recommended by the manufacturer and may cause an unsafe condition.
 - Do not use this equipment for other than intended use.

INSTALLATION

CAUTION: TURN OFF AC POWER TO CIRCUIT BEFORE BEGINNING INSTALLATION.

NEW INSTALLATION (top mount) [For optional restricted ceiling access, see page 5]

1. See Figure 1 before beginning installation.
2. Position metal housing and bar hangers between ceiling or wall joists. Make sure bar hangers are in the correct position to be mounted. Position metal housing temporarily by hammering nail-in tabs on bar hangers, then secure permanently with nails or screw. Bar hangers should be level with bottom of joists (Figure 2).
3. Adjust height of metal housing so that the bottom of the housing is just above the ceiling or wall (Figure 3).
4. Reference correct wiring diagram and make proper electrical connections at the J-box in the metal housing (Figures 4 & 5).

CAUTION: The unused lead must be insulated with the remaining provided wire nut or other approved method.

5. Determine directional Chevron requirements. Follow instructions on provided templates to apply the required Chevron(s). See also Figure 6.
6. Attach safety chain to holes in trim plate assembly. Snap together the quick-connector harness to connect the LED board to the transformer.
7. Connect the battery (EL models) after continuous AC power can be provided to the unit.
8. Secure the trim plate assembly using the provided screws.

INSPECTION AND MAINTENANCE

NOTE: On emergency (EL) models, the battery may be supplied with less than a full charge. After continuous AC power is provided, allow 24 hours for full charge and before initial testing.

LAMP OR BATTERY REPLACEMENT: Use only the replacement part specified on the product (UL) label. Use of any other light source or battery may result in transformer damage or unsafe conditions.

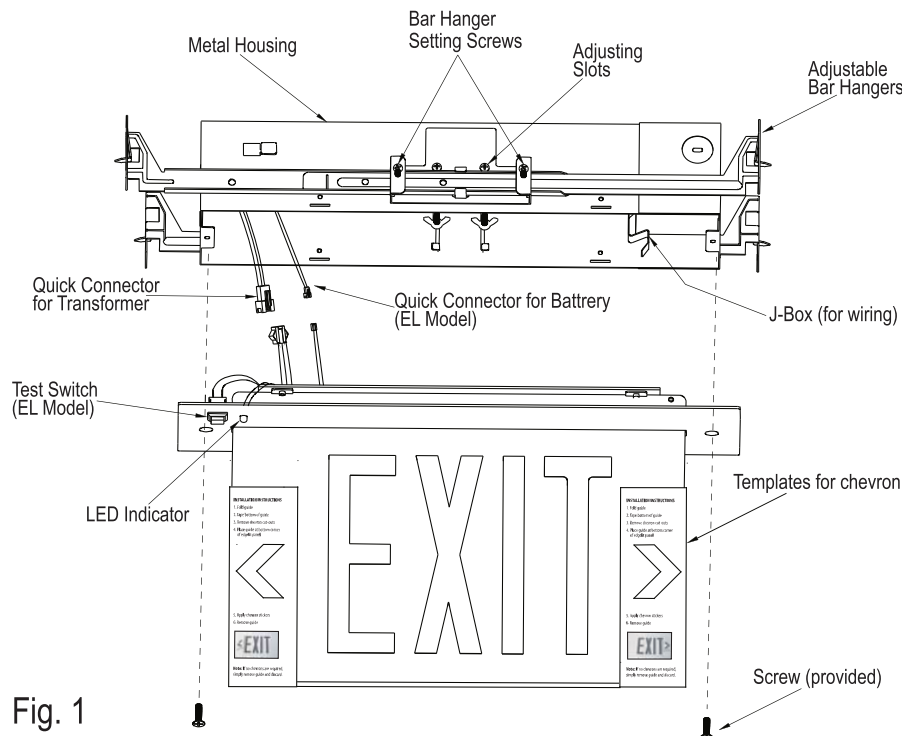


Fig. 1


READ AND FOLLOW ALL SAFETY INSTRUCTIONS

IMPORTANT SAFEGUARDS: When using electrical equipment, always adhere to basic safety precautions including the following:


WIRING DIAGRAMS

Note: Unused input lead must be properly insulated with wire nut or other approved method.


120/277 VOLT (BATTERY BACKUP)

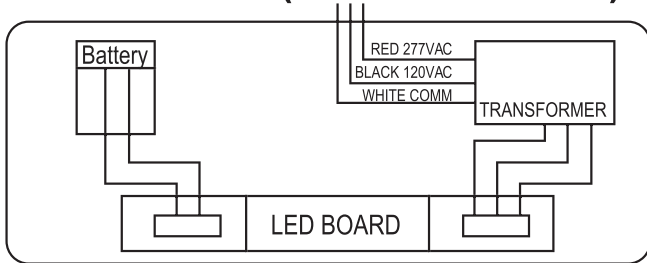


120/277 VOLT (AC ONLY)

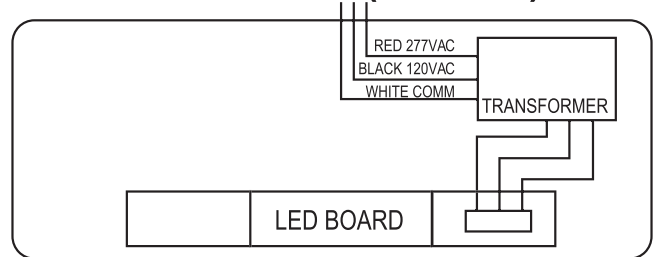


120/277 VOLT (SELF DIAGNOSTIC)

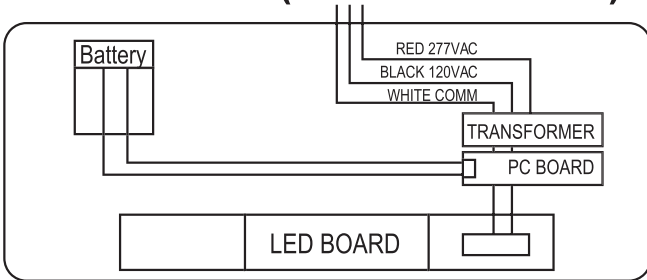


120/277 VOLT (DUAL CIRCUIT)*

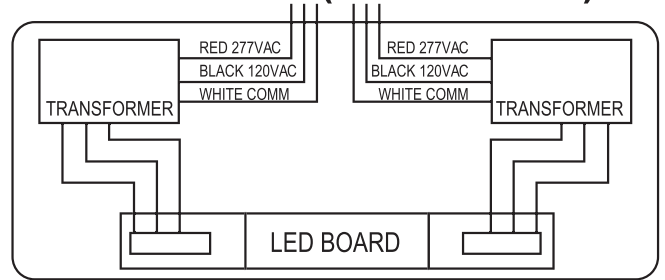


208/220/240 VOLT (BATTERY BACKUP)

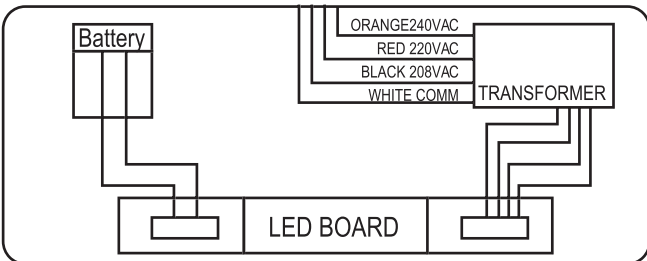

208/220/240 VOLT (AC ONLY)

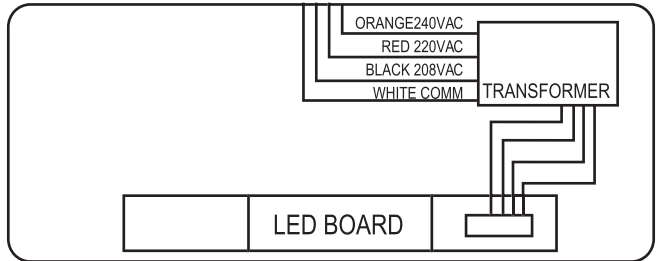


208/220/240 VOLT (DUAL CIRCUIT)*

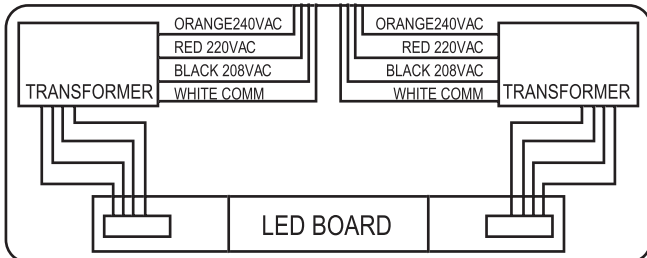

*** Not available in New York
Approved models.**

EXIT/EL/RECESSED | EXIT/EL/RECESSED/NYC

INSTALLATION INSTRUCTIONS

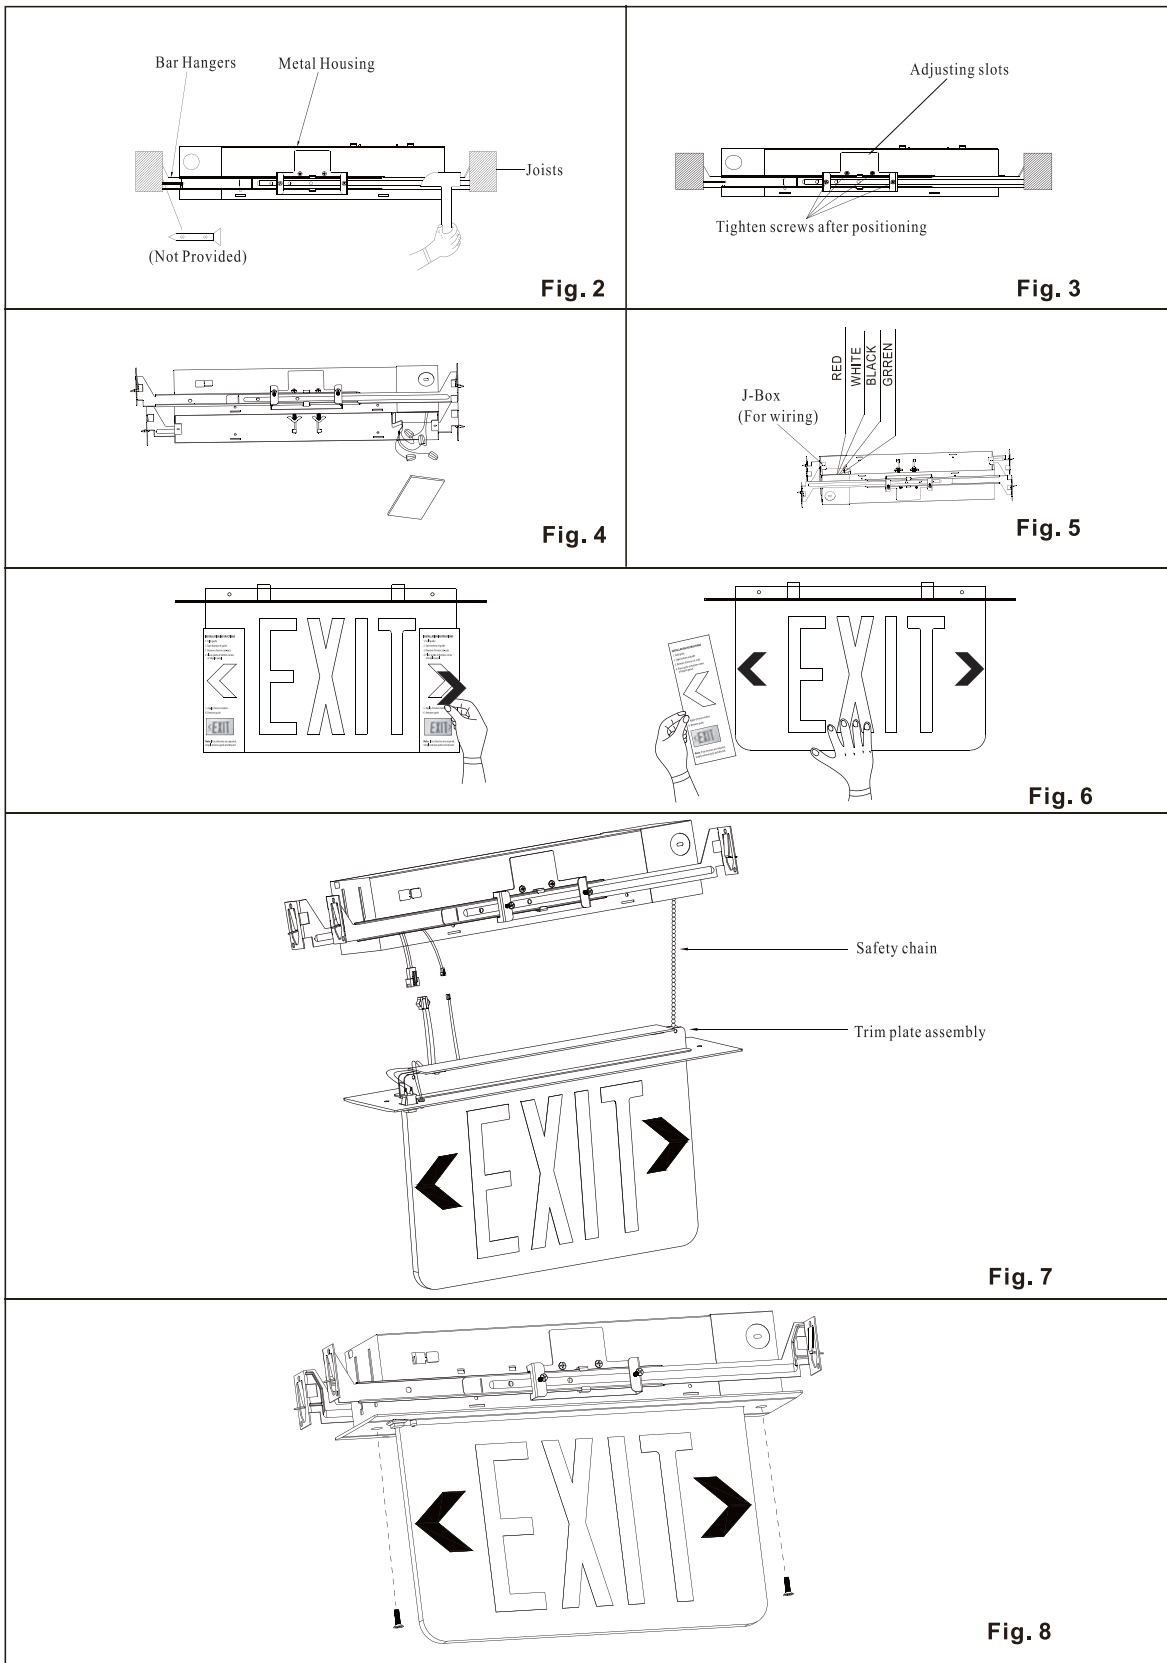

OPTIONAL REMODEL BRACKET-MOUNT INSTALLATION INSTRUCTIONS

NOTE: The unit comes with hardware (placed in a separate pouch) for drywall remodel installation. The pouch should contain a set of (4) metal brackets, (4) small screws, (4) nuts, (4) long screws, and (4) screw holders.

1. Remove all mounting hanger bars.
2. Slide the screw holders into the holes on the unit's housing as shown in Figure A.
3. Secure the screw holders with the small screws provided (refer to Figures B and C).
4. Position the metal brackets beneath the screw holders and inset the long screws (refer to Figure D). Tighten the screw until the head reaches the screw holder (refer to Figure E).

CAUTION: DO NOT TIGHTEN THE SCREWS TO THE POINT WHERE THE BRACKETS START TO EXPAND OUTWARD.

5. Cut a hole in the ceiling or wall using the provided template. Turn housing on the side and slide through the hole in the ceiling or wall.
6. Once the housing is inside the ceiling or wall, return back to original position and start tightening the long screws. At this point the brackets start to bow out. (Figure F).
7. Follow steps 4-8 from page 2 to finish.

RECESSED BOX SIDE HANGER BAR-MOUNTING INSTRUCTION

1. Knock-out the slot at the end of recessed box. (refer to Figure H).
2. Un-tight the Wing Nut and remove both of the Hanger Bars and washers. (refer to Figure I).
3. Install the Hang Bar to the side of the recessed box and tight up the Wing Nut with the washer. (refer to Figure J).
4. Follow steps 1-8 from the "New Installation" Instructions (page 2).

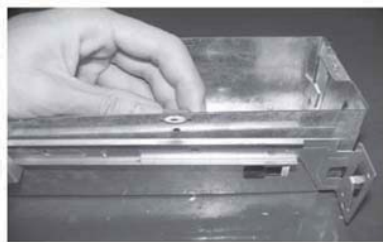


Figure A



Figure B



Figure C



Figure D



Figure E



Figure F



Figure G




Figure H




Figure I



Figure J

CAUTION: For safety and proper operation, read and follow instructions carefully before installation.

INSTRUCTIONS to CONVERT STANDARD RECESSED-MOUNT EDGELIT to WALL-MOUNT RECESSED UNIT

IMPORTANT SAFEGUARDS

READ AND FOLLOW ALL SAFETY INSTRUCTIONS






SAVE THESE INSTRUCTIONS AND DELIVER TO OWNER AFTER INSTALLATION

Note: This conversion is only possible with 1-FACE Clear or 1-FACE with Mylar Recessed Edgelits.

Parts Needed: (1) WALL-MOUNT ADAPTER BRACKET, (2) WALL-MOUNT COVERPLATES, (4) #4-40 x 1/4" MACHINE SCREWS











Conversion Procedure:

1. Pull the standard unit out of the box (Fig.1).
2. Separate the trimplate (with or without EXIT panel attached) from housing by removing the two screws (Fig.2 & Fig.3). Unhook the safety chain and disconnect the Transformer connector to finish the separation (Fig.4 & Fig.5).
3. On the detached trimplate section, pull out the LED indicator and the test switch leads (Fig.6 & Fig.7).

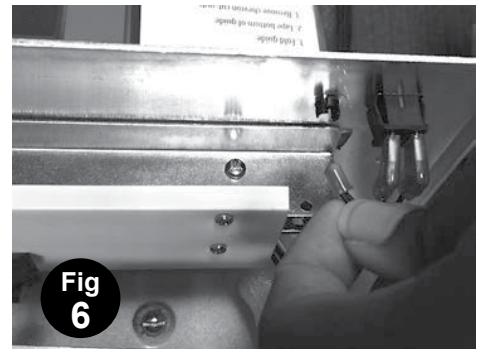
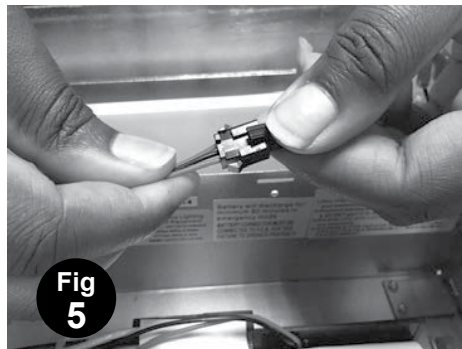
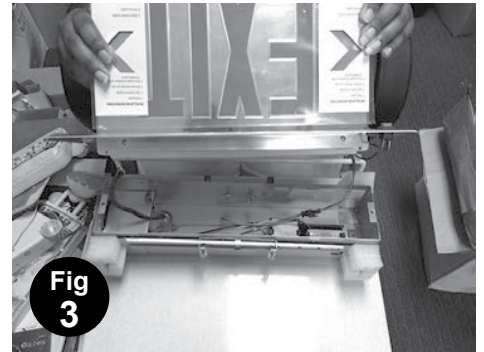
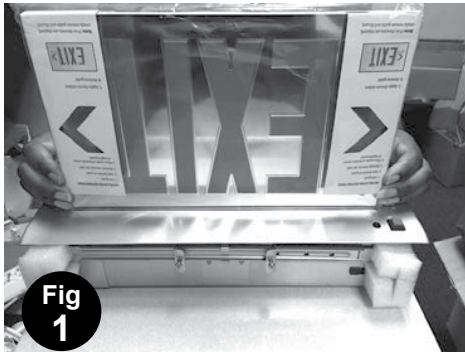
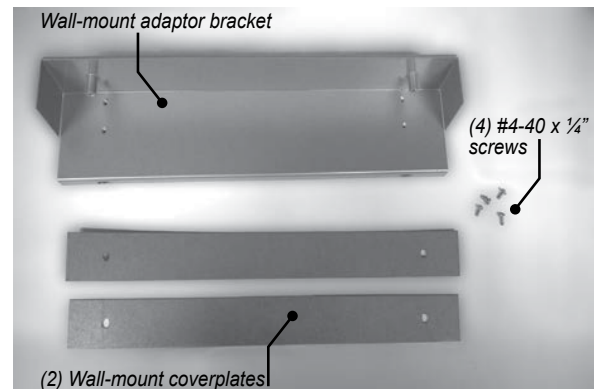


INSTALLATION INSTRUCTIONS

4. Separate the LED/PCB board from the trimplate section, by removing the (4) screws attached (Fig.8 & Fig.9).
5. Separate the EXIT panel (if included) from the trimplate section by removing the (2) screws and place it aside (Fig.10 & Fig.11).
6. Take the WALL-MOUNT ADAPTER BRACKET and attach the LED/PCB board to it using (4) #4-40 x 1/4" screws provided (Fig.12, Fig.13 & Fig.14).
7. Take one of (2) COVERPLATES provided and place it with the holes aligned against the two holes on the ADAPTER BRACKET (Fig.15).
8. Place the EXIT panel on top of the COVERPLATE aligning the screw holes. Make sure the EXIT side is facing down (Fig.16).
9. Place the second COVERPLATE on top of the panel and then attach the PANEL to the BRACKET using the (2) screws that were either previously removed in Step.5 (Fig.17 & Fig.18) or provided separately.

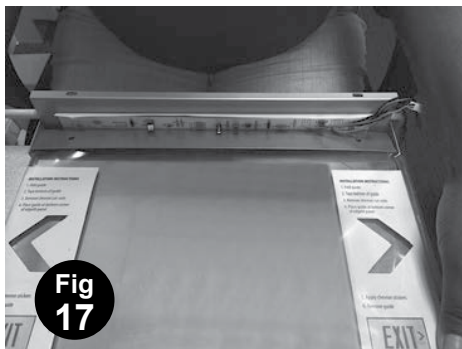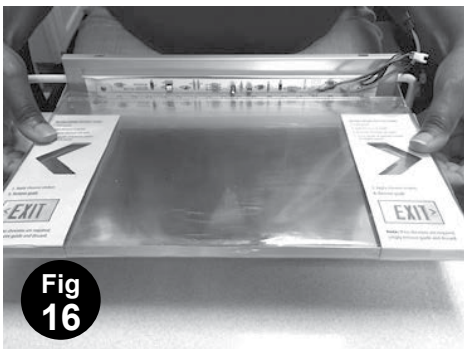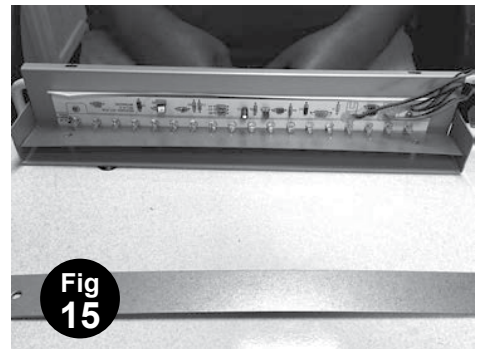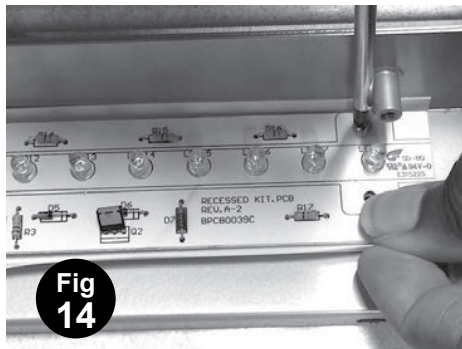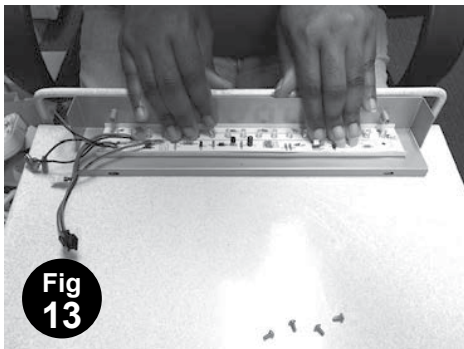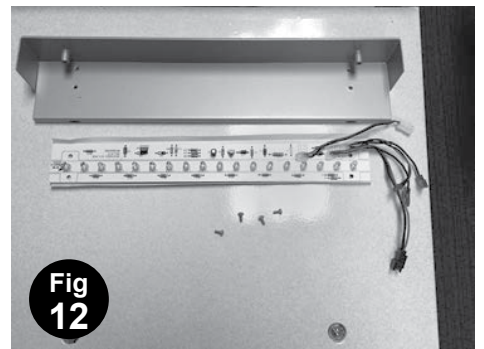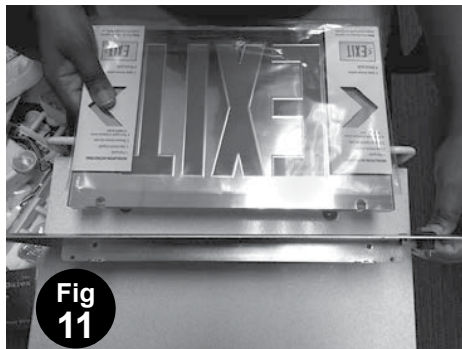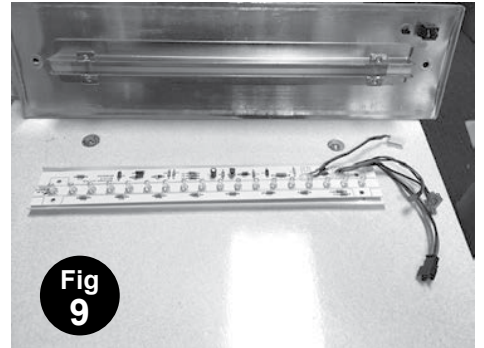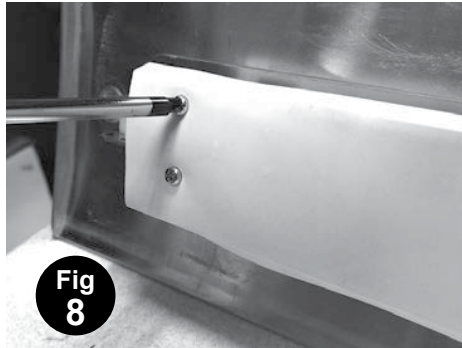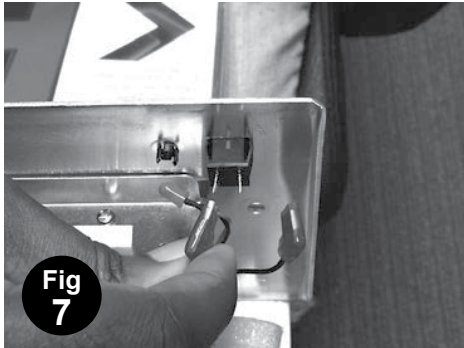

10. Take the previously detached trimplate and slide through the ADAPTER BRACKET making sure that the screw holes are aligned. Secure using (2) of the (4) screws that were removed in Step.4 (Fig.19 & Fig.20).
11. Plug the LED indicator to the trimplate and reconnect the switch leads (Fig.21).
12. Re-attach the Transformer connector to the LED/PCB and the safety chain to the trimplate (Fig.22 & Fig.23).
13. Secure the trimplate section to the backbox using the (2) screws that were previously removed in Step.2 (Fig.24).
14. Conversion is now complete (Fig.25).

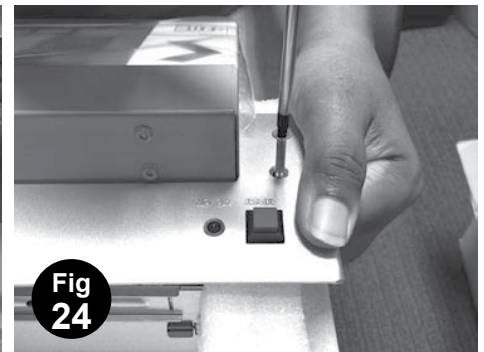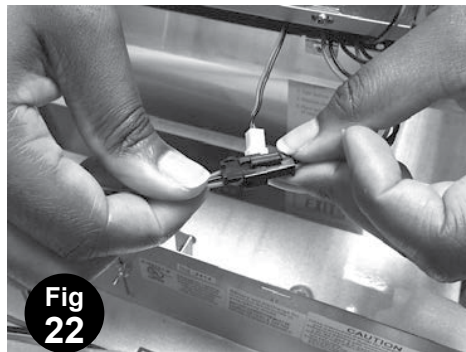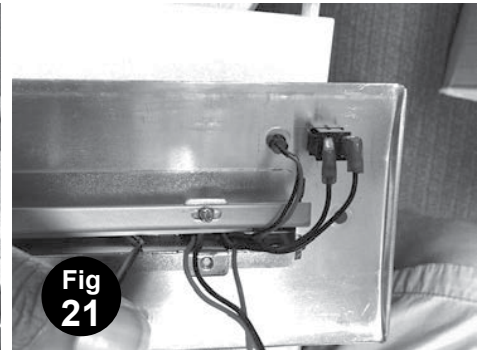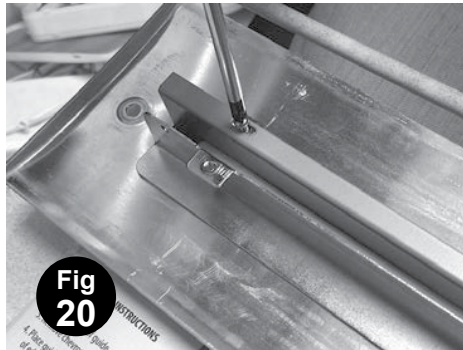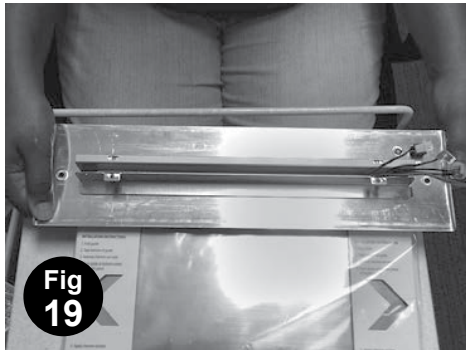

SELF-DIAGNOSTIC TESTING OPTION

1) Introduction

Once the unit is properly installed according to the Installation instruction sheet and AC power is supplied, the EXIT will come ON. The dual color LED indicator will also come ON, automatically initiating the self diagnostic test function. The LED indicator points out the current unit status. A STEADY GREEN on the LED indicator indicates a normal service; BLINKING GREEN indicates that the unit is in testing mode; GREEN/RED FLASHING indicates that the battery is charging; RED (STEADY and BLINKING) would indicate a fault or a service alert. Refer to section 3 – Fault Indication for more details. The LED indicator would be OFF when the unit is in Emergency mode.

2) Self-Diagnostic Service

The self diagnostic function is factory preset without any field adjustment. The automatic self diagnostic feature serves the following tests–

- On-line real time monitoring of battery, lamps and LED(s): Identifies battery charging, disconnection and failure along with LED failures.
- Self testing and a 30 second discharge once every 30 days (conforming to NFPA code requirements), after AC power has been supplied for a minimum of 24 hours.
- Self testing and a 30 minute discharge once every 180 days, after AC power has been supplied for a minimum of 24 hours.
- Self testing and a 90 minute discharge once every 365 days, after AC power has been supplied for a minimum of 24 hours.

3) Fault Indication

Function	LED Indication
Unit is in normal mode	STEADY Green
Battery Disconnected	STEADY Red
Battery Recharge	Red and Green (flashing alternatively)
Battery Recharge Failure*	FLASHING Red
Battery Failure**	Red BLINKING '2' times
LED Failure	Red BLINKING '3' times

*A battery recharge failure will come up if the battery is NOT able to recharge within the 24 hrs charging time

**A battery failure will come up if the battery is NOT able to operate the LED strip for the period of a discharge test

4) Manual Testing

This unit also provides for manual testing by pushing the test switch in a specific pattern. The different patterns and the resulting tests are listed in the table below.

Action	Reaction & LED Indication
Push test button once (within 2 seconds)	30-second test; FLASHING Green
Push test button '2' times (within 2 seconds)	30-minute test; Green BLINKING '2' times
Push test button '3' times (within 2 seconds)	90-minute test; Green BLINKING '3' times
Push & Hold test button (3-5 seconds)	System Interruption
Push & Hold test button (more than 6 seconds)	System Reset

5) Operation

During an electrical power failure, the LED sign will transfer into Emergency mode and stay LIT for a minimum of 90 minutes. To test this unit, the battery needs to be charged initially for 24 hours before depressing the test switch (to do manual test). On pressing the test switch, the sign will transfer into a SIMULATED Emergency mode with the LED indicator FLASHING/BLINKING Green. Sign will switch back into AC ON mode after 30 seconds/30 minutes/90 minutes respectively.