

LT SURFACE MOUNT KIT (SMK)


INSTALLATION INSTRUCTIONS



WARNING:

- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Make sure all electrical power is turned off while installing the fixture.
- This luminaire must be adequately grounded for protection against shock hazards and to assure proper operation.
- Disconnect power before servicing.
- LEDs are ESD (Electro Static Discharge) sensitive devices that can be easily damaged if the proper ESD mitigating steps are not taken.
- LEDs are very sensitive to mechanical damage. Caution must be taken to avoid damage to the LEDs.
- ESD or mechanical damage voids all warranties.
- Suitable for dry and damp locations.


BACK VIEWS

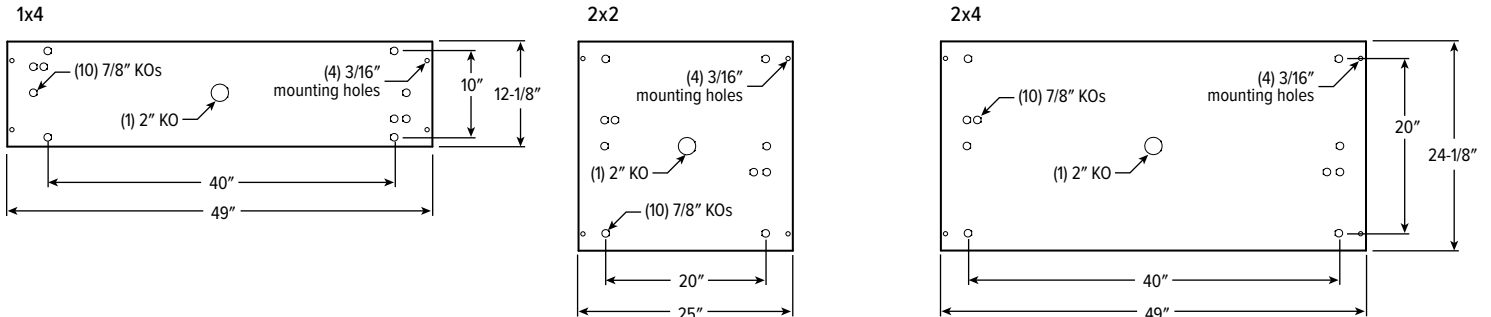

INSTALLATION


- STEP 1:** Follow the steps below to install the fixture(s) as a Surface Mount application:
- Carefully unpack the fixture and Surface Mount Kit (SMK).
 - Surface mount fixtures typically mount directly over a recessed junction box (by others). Remove the appropriate knockout in the SMK to bring incoming power into the fixture. (See "BACK VIEWS")
 - Mount the SMK to the ceiling using the four 7/32" holes located in the corners, with incoming power pulled into SMK. (See "BACK VIEWS") The additional wire, fasteners, bolts, etc. required to support the fixture will be provided by others.

FIG 2.2

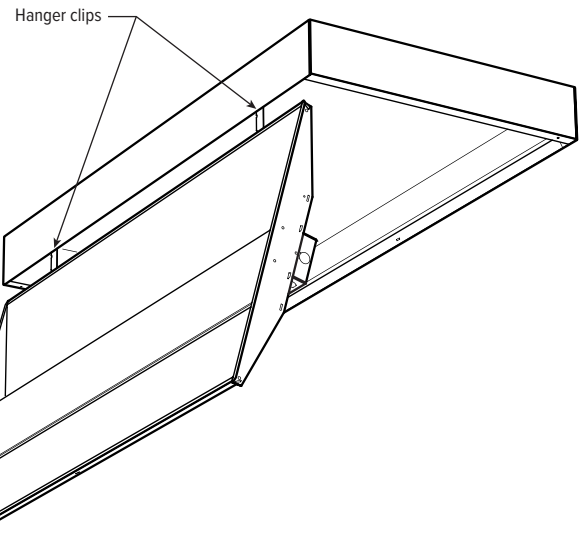

- STEP 2:** Once the SMK is installed, follow the steps below to complete necessary electrical connections and installation:
- After the SMK is mounted to the ceiling, to facilitate wiring, two hanger clips (provided) may be used to hang the fixture from the SMK. (See FIG 2.2)

FIG 2.1 Make electrical connections in accordance with NEC and local codes.

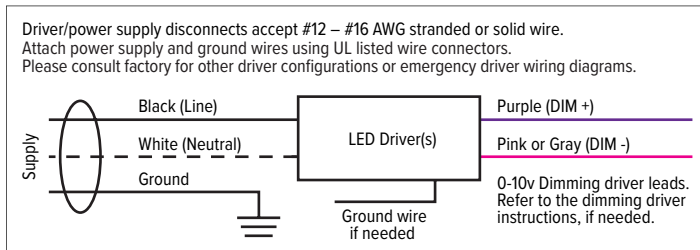


CONTINUED ON PAGE 2

LT SURFACE MOUNT KIT (SMK)

INSTALLATION INSTRUCTIONS

- B. Connect incoming power to the driver leads, located inside the fixture driver compartment.
- C. Insert the fixture, at a slight angle, into the SMK by slipping one end of the fixture into the end of the SMK. Allow the fixture to extend into the end of the SMK until the opposite end may be raised inside. (See FIG 2.3)


FIG 2.3

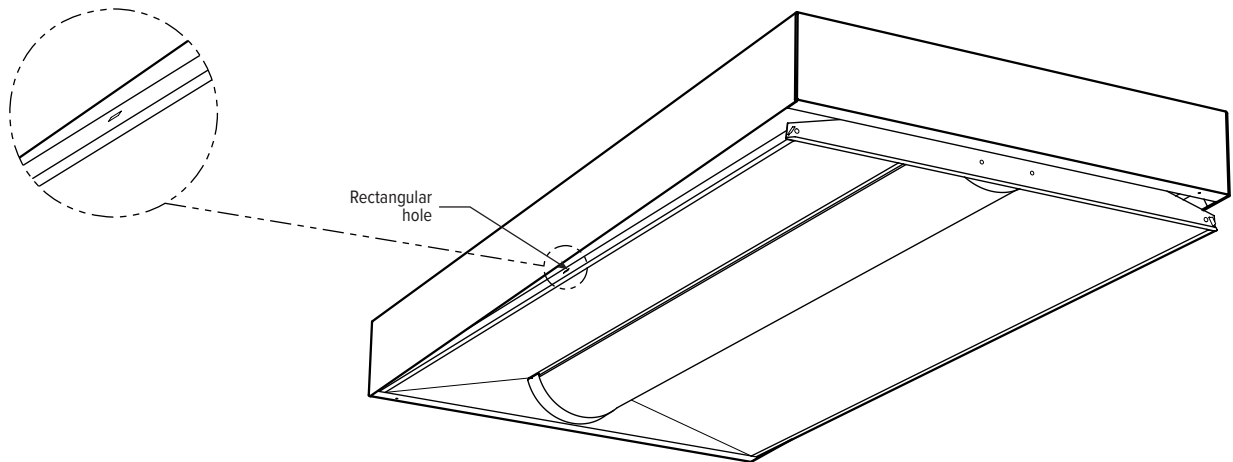

- D. Center the fixture in the SMK.
 - E. Clips in the SMK will engage the rectangular holes in the fixture's sides (See FIG 2.3).
- NOTE:** Removal of the fixture may require inserting a screwdriver between the SMK and fixture at the clip location to disengage the clip.
- F. Install two screws (provided, painted white) on each of the end flanges to lock centered fixture in place.

NOTE: To remove fixture, first remove white screws. (See FIG 2.3)

FIG 2.3

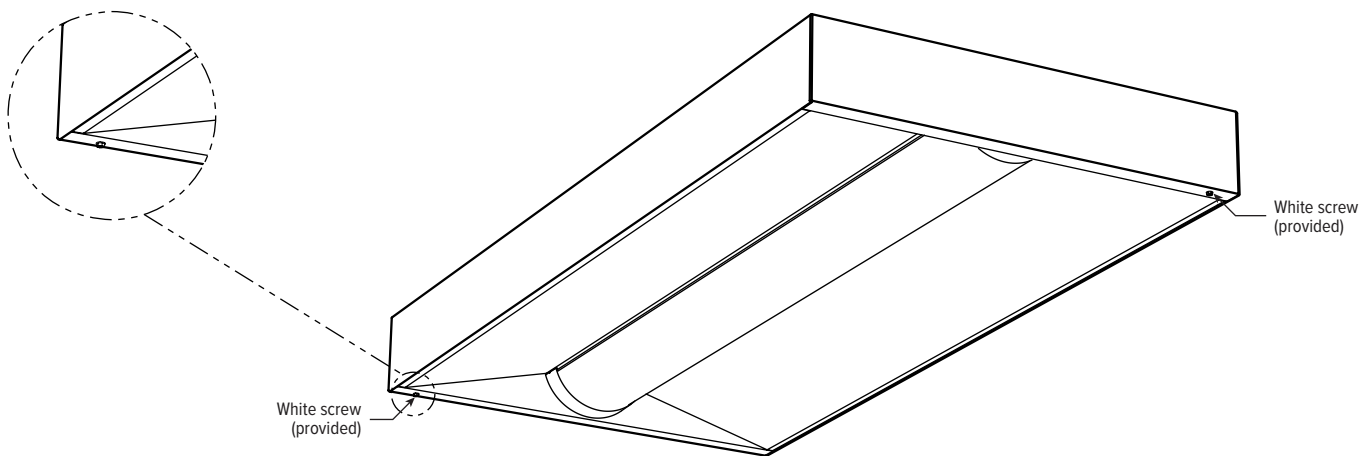

NOTE: Refer to individual product specification sheets for further information.