

# AX2W LED SERIES

## INSTALLATION INSTRUCTIONS



### WARNING:

- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Make sure all electrical power is turned off while installing the fixture.
- This luminaire must be adequately grounded for protection against shock hazards and to assure proper operation.
- Disconnect power before servicing.


- LEDs are ESD (Electro Static Discharge) sensitive devices that can be easily damaged if the proper ESD mitigating steps are not taken.
- LEDs are very sensitive to mechanical damage. Caution must be taken to avoid damage to the LEDs.
- ESD or mechanical damage voids all warranties.
- Suitable for dry and damp locations.

**STEP 1:** Line up fixtures that will be mounted in the same row.

**STEP 2:** Level mounting bracket on the wall with electrical access and attach to wall surface.


**STEP 3:** Attach fixture to bracket (by putting fixture in groove at bottom and rotating upward) with #8 x1/4" flat screws provided.

**FIG 3.1**

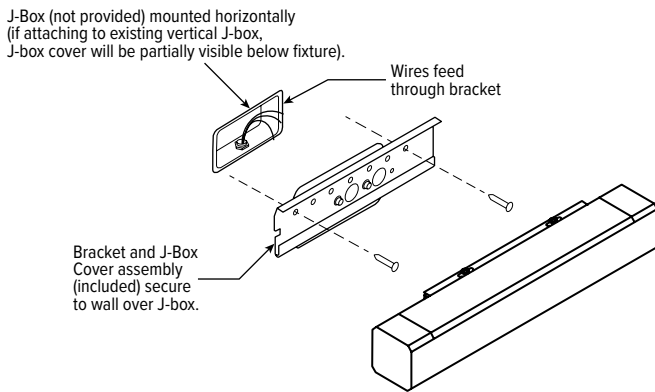

**STEP 4:** Make electrical connections.


**FIG 4.1** Make electrical connections in accordance with NEC and local codes.

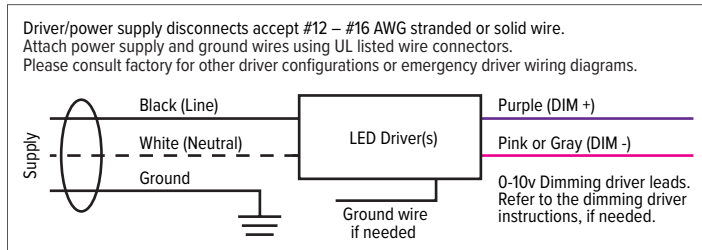

**STEP 5:** To remove lens, insert a putty knife or flat blade screwdriver between the lens and channel. Pry up to get the lens loosened and then gently peel the lens up.

**STEP 6:** For continuous row applications, use the breakaway section as a guide for the next bracket. Check for level.


**FIG 6.1**

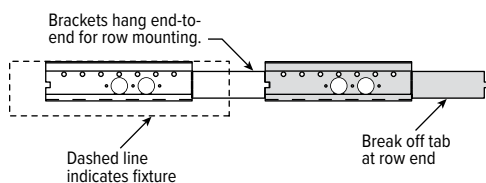

**STEP 7:** After installing fixture, bend tabs closed.

**STEP 8:** When row mounting fixtures, the joint between fixtures will have a continuous row bracket. After connecting quick connects and fixtures, add continuous row bracket around the fixture by snapping the bracket into place.

**FIG 8.1**

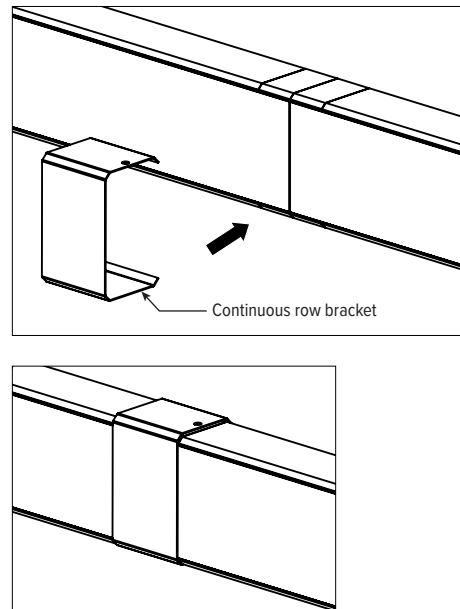

**NOTE:** Refer to individual product specification sheets for further information.