

SLF SERIES

INSTALLATION INSTRUCTIONS



WARNING:


- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Make sure all electrical power is turned off while installing the fixture.
- This luminaire must be adequately grounded for protection against shock hazards and to assure proper operation.
- Disconnect power before servicing.

- LEDs are ESD (Electro Static Discharge) sensitive devices that can be easily damaged if the proper ESD mitigating steps are not taken.
- LEDs are very sensitive to mechanical damage. Caution must be taken to avoid damage to the LEDs.
- ESD or mechanical damage voids all warranties.
- Suitable for dry and damp locations.

INSTALLATION


STEP 1: Fixture ships assembled. It must be disassembled for wiring and mounting. If applicable, remove optional #8 snake-eye tamper-resistant screws from housing.

FIG 1.1 4" Shown

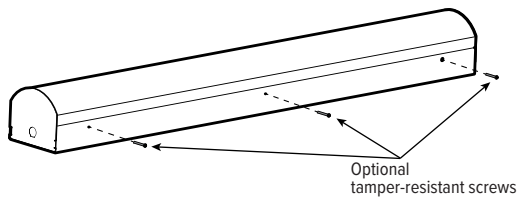


STEP 2: Squeeze lens together to dislodge from grooves in side of fixture and lift to remove.

FIG 2.1

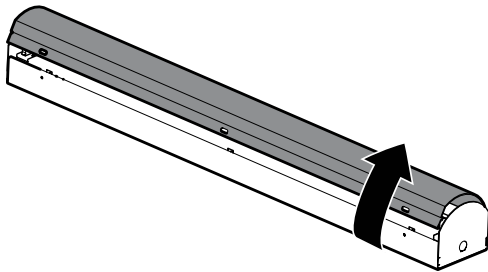


STEP 3: Remove the wireway cover by turning the 1/4 turn fasteners on either end of fixture using a flat-head screwdriver.

FIG 3.1

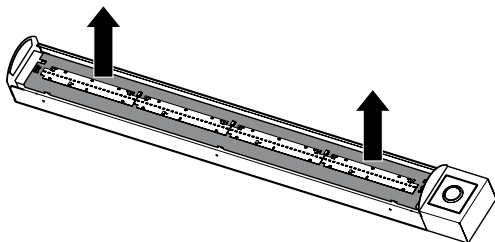


STEP 4: Reach around the sides of the channel with one hand and squeeze together. With the other hand, reach around the side with the tab and lift up the bracket to unsnap the tab and remove it from the assembly.

FIG 4.1

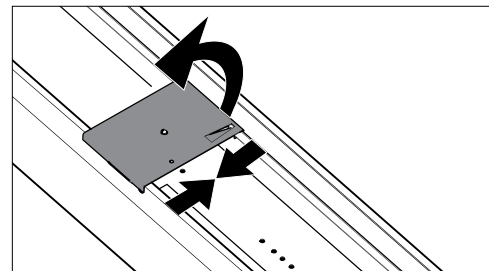


STEP 5: Insert wires through knock-out at the center of the fixture. Make electrical connections in accordance with NEC and local codes (FIG 5.1).

FIG 5.1

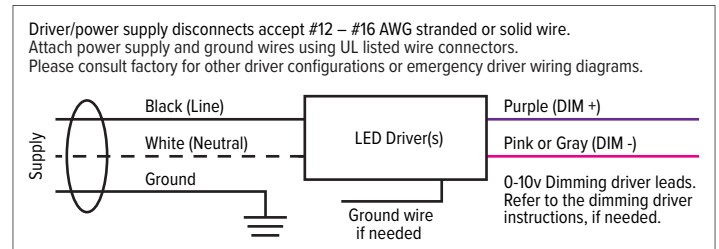

STEP 6: Secure fixture to the wall using mounting holes provided (FIG 6.1)

FIG 6.1

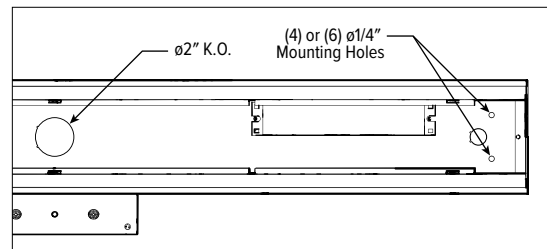


INSTALLATION INSTRUCTIONS CONTINUED ON NEXT PAGE.

SLF SERIES

INSTALLATION INSTRUCTIONS


STEP 7: Align tab and snap brackets in place.

FIG 7.1

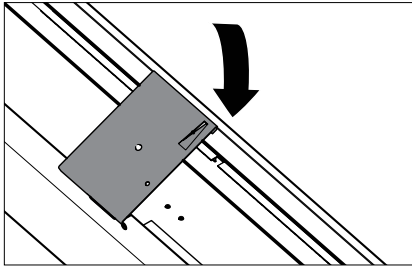


STEP 8: Attach the wireway cover using 1/4 turn fasteners.

FIG 8.1

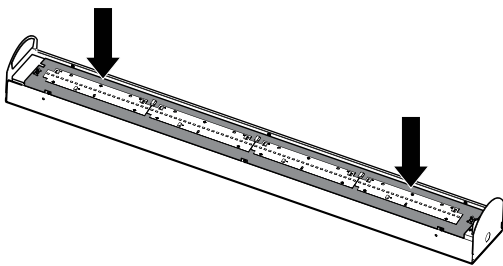


STEP 9: Snap in the lens.

FIG 9.1

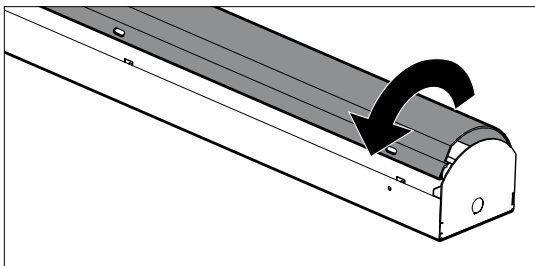

STEP 10: If applicable, keeping screw straight, secure lens with optional #8 snake-eye tamper-proof screws.


FIG 10.1

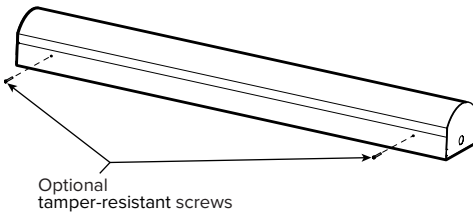

OCCUPANCY SENSOR MODIFICATION

OCCWS FS-505-PP

- A. Install fixture with occupancy sensor below the lens. Sensor is not designed for installation above the fixture lens.

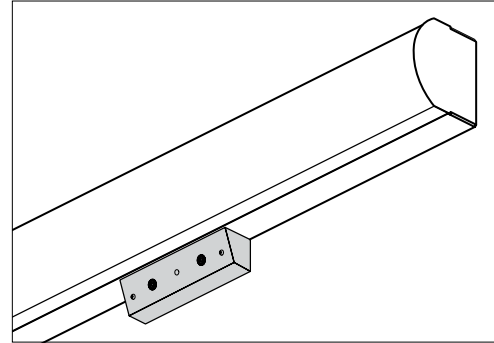

- B. Remove #8 snake-eye tamper-resistant screws to access sensor. Visit www.wattstopper.com for details.

