

NEMA TYPE "G" CEILING INSTRUCTIONS (with accommodation for TYPES "NFG" and "SS") FOR USE WITH SERIES LL6


**** Installation of these products should only be performed by a qualified electrician. ****

What is a NEMA "G" (Grid) fixture?

All Williams grid fixtures (NEMA Type "G", with accommodation for Types "NFG" and "SS") are designed to fit securely into standard NEMA Type "G", 15/16" wide nominal T-bar ceiling system as well as accommodate NEMA Type "NFG" and "SS", 9/16" wide nominal T-bar systems without modification.

NEMA GRID INSTALLATION:

1. Follow the steps below to install the fixture(s) into a NEMA Type "G", NEMA Type "NFG" or Type "SS" ceiling system:
 - a. Raise the fixture through the ceiling opening and rest the fixture in the grid system.
 - b. Center the fixture within the opening.
 - c. Use earthquake clips or integral T-bar clips to secure the fixture to the ceiling structure for added stability.
 - d. Refer to local codes for other installation requirements.
2. Once the fixture is installed into the ceiling system, follow the steps below to complete necessary electrical connections:
 - a. Remove access plate on the back of the fixture (see illustration below).
 - b. Remove ballast supply wires from access plate.
 - c. Make wire connections in accordance with local codes. Ground screw is provided on access plate.
 - d. Replace access plate.

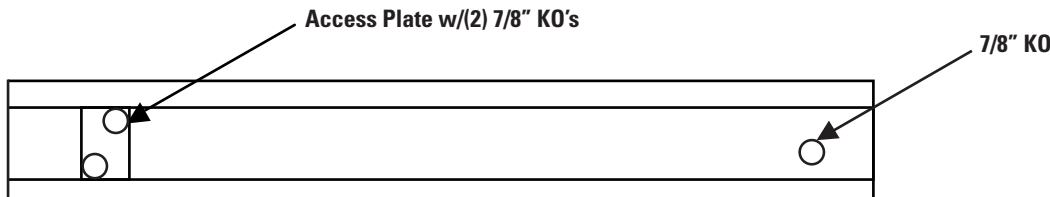

Note: Refer to individual product specification sheets for further information.

