



IES INDOOR REPORT

PHOTOMETRIC FILENAME : 8CR-TL-L15-840-(L12)-WHT-DIM-UNV-OW-CS-PM_.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] GEN FROM BALLABS TEST NO. 20687.0

[TESTLAB] BUILDING ACOUSTICS & LIGHTING LABORATORIES, INC

[ISSUEDATE] 11/08/2022

[MANUFAC] WILLIAMS INDOOR

[OTHER] H.E. WILLIAMS, INC - CARTHAGE, MO

[LUMINAIRE] 8"RND LED CYLINDER 19" TALL

[MORE] OPEN SEMI-SPEC SPUN ALUMINUM REFLECTOR (WIDE)

[LUMCAT] 8CR-TL-L15-840-(L12)-WHT-DIM-UNV-OW-CS-PMxx

[LAMPCAT] V13 BXRE-35E2000

[_SEARCH_SOURCETYPE] LED

[_SEARCH_APPLICATION] Indoor, Architectural, Classroom, Commercial, Healthcare, Office, Downlight

[_SEARCH_MOUNTING] Pendant, Surface, Wall

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1214
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	113
Total Luminaire Watts	10.7
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.26
Spacing Criterion (90-270)	1.26
Spacing Criterion (Diagonal)	0.98
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.48 ft (Diameter)
Luminous Width (90-270)	0.48 ft (Diameter)
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	2249	2249	2249
55	783	783	783
65	164	164	164
75	0	0	0
85	0	0	0

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 8CR-TL-L15-840-(L12)-WHT-DIM-UNV-OW-CS-PM_.IES

CANDELA TABULATION

	<u>0</u>
0	968.419
5	914.554
10	1006.646
15	1004.909
20	1049.507
25	1147.970
30	1127.699
35	349.836
40	48.073
45	26.643
50	15.638
55	7.530
60	4.054
65	1.158
70	0.000
75	0.000
80	0.000
85	0.000
90	0.000

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 8CR-TL-L15-840-(L12)-WHT-DIM-UNV-OW-CS-PM_.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	379.87	N.A.	31.30
0-30	898.34	N.A.	74.00
0-40	1182.3	N.A.	97.40
0-60	1212.4	N.A.	99.90
0-80	1213.96	N.A.	100.00
0-90	1213.96	N.A.	100.00
10-90	1122.72	N.A.	92.50
20-40	802.43	N.A.	66.10
20-50	824.81	N.A.	67.90
40-70	31.65	N.A.	2.60
60-80	1.56	N.A.	0.10
70-80	0.00	N.A.	0.00
80-90	0.00	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1213.96	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	91.24
10-20	288.64
20-30	518.46
30-40	283.97
40-50	22.38
50-60	7.72
60-70	1.56
70-80	0.00
80-90	0.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 8CR-TL-L15-840-(L12)-WHT-DIM-UNV-OW-CS-PM_IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81
4	97	90	84	80	95	89	83	79	86	82	79	84	81	78	83	79	77	75
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70
6	87	78	72	68	86	78	72	68	76	71	67	75	70	67	73	70	67	65
7	83	74	68	63	82	73	67	63	72	67	63	70	66	62	69	65	62	61
8	79	69	63	59	78	69	63	59	67	62	59	66	62	58	65	61	58	57
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	57	54	53
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	50

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 8CR-TL-L15-840-(L12)-WHT-DIM-UNV-OW-CS-PM_IES

UGR TABLE - CORRECTED

Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size UGR Viewed Crosswise


X=2H	Y=2H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	3H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	4H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	6H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	8H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	12H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7

UGR Viewed Endwise

4H	2H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	3H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	4H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	6H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	8H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	12H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
8H	4H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	6H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	8H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	12H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
12H	4H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	6H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	8H	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7

Maximum UGR = 0.7

POLAR GRAPH

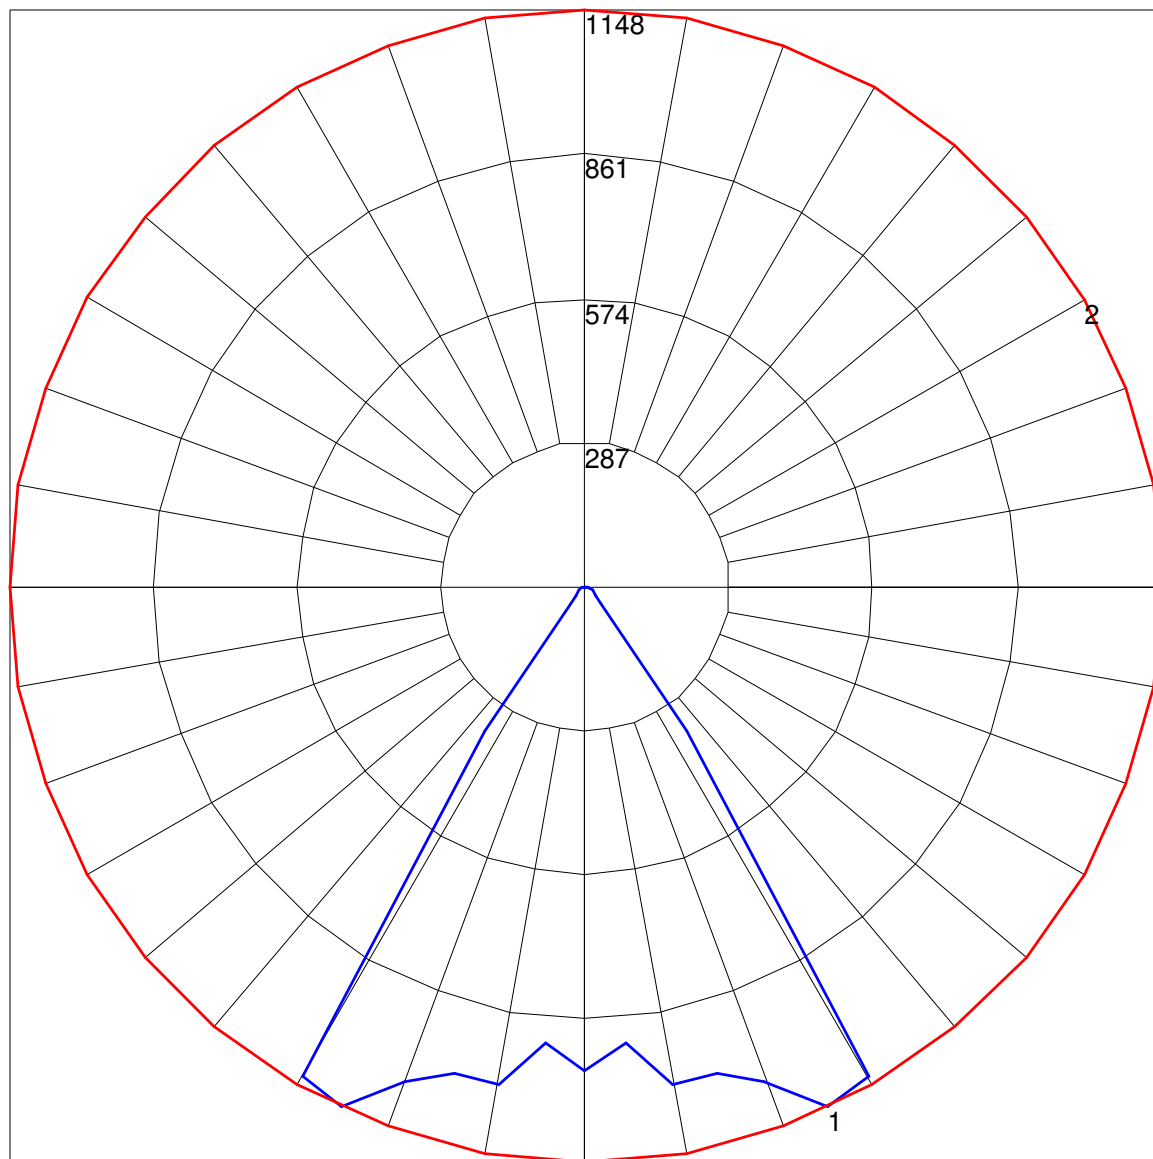

Maximum Candela = 1147.97 Located At Horizontal Angle = 0, Vertical Angle = 25
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (25) (Through Max. Cd.)