



IES INDOOR REPORT

PHOTOMETRIC FILENAME : 8CR-TL-L15-830-XXX-DIM-UNV-RW-CS-XX_.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] GEN from BALLABS TEST NO. 20733.0

[TESTLAB] BUILDING ACOUSTICS & LIGHTING LABORATORIES, INC

[ISSUEDATE] 1-FEB-2021

[MANUFAC] WILLIAMS INDOOR

[OTHER] H.E. WILLIAMS, INC - CARTHAGE, MO

[LUMINAIRE] BRIDGELUX VERO13 LED 8" ROUND SURFACE CYLINDER

[MORE] WHITE REFL w/MICRO-PRISM GLASS LENS & SEMI-SPEC CONE

[LUMCAT] 8CR-TL-L15-830-xxx-DIM-UNV-RW-CS-xx

[LAMPCAT] BRIDGELUX V13 BXRE-35e2000

[_SEARCH_SOURCETYPE] LED

[_SEARCH_APPLICATION] Indoor, Architectural, Classroom, Commercial, Healthcare, Office, Downlight

[_SEARCH_MOUNTING] Surface

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1046
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	76
Total Luminaire Watts	13.8
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.44
Spacing Criterion (90-270)	0.44
Spacing Criterion (Diagonal)	0.80
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.48 ft (Diameter)
Luminous Width (90-270)	0.48 ft (Diameter)
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	11687	11687	11687
55	8013	8013	8013
65	3093	3093	3093
75	0	0	0
85	0	0	0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 8CR-TL-L15-830-XXX-DIM-UNV-RW-CS-XX_.IES

CANDELA TABULATION

	<u>0</u>
0	1597.855
5	1591.363
10	965.927
15	716.330
20	708.394
25	702.623
30	576.382
35	230.120
40	162.310
45	141.390
50	113.978
55	78.630
60	47.611
65	22.363
70	7.214
75	0.000
80	0.000
85	0.000
90	0.000

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 8CR-TL-L15-830-XXX-DIM-UNV-RW-CS-XX_.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	346.82	N.A.	33.20
0-30	656.66	N.A.	62.80
0-40	840.90	N.A.	80.40
0-60	1019.79	N.A.	97.50
0-80	1046.18	N.A.	100.00
0-90	1046.18	N.A.	100.00
10-90	916.57	N.A.	87.60
20-40	494.09	N.A.	47.20
20-50	601.92	N.A.	57.50
40-70	203.39	N.A.	19.40
60-80	26.39	N.A.	2.50
70-80	1.89	N.A.	0.20
80-90	0.00	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1046.18	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	129.61
10-20	217.21
20-30	309.85
30-40	184.24
40-50	107.83
50-60	71.06
60-70	24.50
70-80	1.89
80-90	0.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT
 PHOTOMETRIC FILENAME : 8CR-TL-L15-830-XXX-DIM-UNV-RW-CS-XX_.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92
2	107	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84
3	100	93	88	84	98	92	87	83	89	85	81	87	83	80	85	82	79	77
4	95	86	80	76	93	85	80	75	83	78	74	81	77	73	79	76	73	71
5	89	80	74	69	88	79	73	69	77	72	68	76	71	68	74	70	67	65
6	85	75	68	64	83	74	68	63	73	67	63	71	66	63	70	65	62	61
7	80	70	64	59	79	69	63	59	68	63	58	67	62	58	66	61	58	56
8	76	66	59	55	75	65	59	55	64	58	55	63	58	54	62	57	54	53
9	72	62	56	51	71	61	55	51	60	55	51	59	54	51	59	54	51	49
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	56	51	48	46

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 8CR-TL-L15-830-XXX-DIM-UNV-RW-CS-XX_.IES

UGR TABLE - CORRECTED

Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size UGR Viewed Crosswise

X=2H	Y=2H	15.1	16.3	15.5	16.6	16.9	15.1	16.3	15.5	16.6	16.9
	3H	15.2	16.2	15.5	16.5	16.9	15.2	16.2	15.5	16.5	16.9
	4H	15.1	16.0	15.5	16.4	16.7	15.1	16.0	15.5	16.4	16.7
	6H	15.0	15.8	15.4	16.2	16.6	15.0	15.8	15.4	16.2	16.6
	8H	14.9	15.7	15.4	16.1	16.5	14.9	15.7	15.4	16.1	16.5
	12H	14.9	15.6	15.3	16.0	16.5	14.9	15.6	15.3	16.0	16.5

UGR Viewed Endwise


4H	2H	15.1	16.0	15.5	16.4	16.8	15.1	16.0	15.5	16.4	16.8
	3H	15.1	15.9	15.6	16.3	16.7	15.1	15.9	15.6	16.3	16.7
	4H	15.0	15.7	15.5	16.1	16.6	15.0	15.7	15.5	16.1	16.6
	6H	14.9	15.5	15.4	16.0	16.4	14.9	15.5	15.4	16.0	16.4
	8H	14.9	15.4	15.3	15.9	16.3	14.9	15.4	15.3	15.9	16.3
	12H	14.8	15.3	15.3	15.8	16.2	14.8	15.3	15.3	15.8	16.2

8H	4H	14.9	15.4	15.3	15.9	16.3	14.9	15.4	15.3	15.9	16.3
	6H	14.8	15.2	15.3	15.7	16.2	14.8	15.2	15.3	15.7	16.2
	8H	14.7	15.1	15.2	15.6	16.1	14.7	15.1	15.2	15.6	16.1
	12H	14.7	15.0	15.2	15.5	16.1	14.7	15.0	15.2	15.5	16.1

12H	4H	14.8	15.3	15.3	15.8	16.3	14.8	15.3	15.3	15.8	16.3
	6H	14.7	15.1	15.2	15.6	16.1	14.7	15.1	15.2	15.6	16.1
	8H	14.7	15.0	15.2	15.5	16.1	14.7	15.0	15.2	15.5	16.1

Maximum UGR = 16.9

POLAR GRAPH

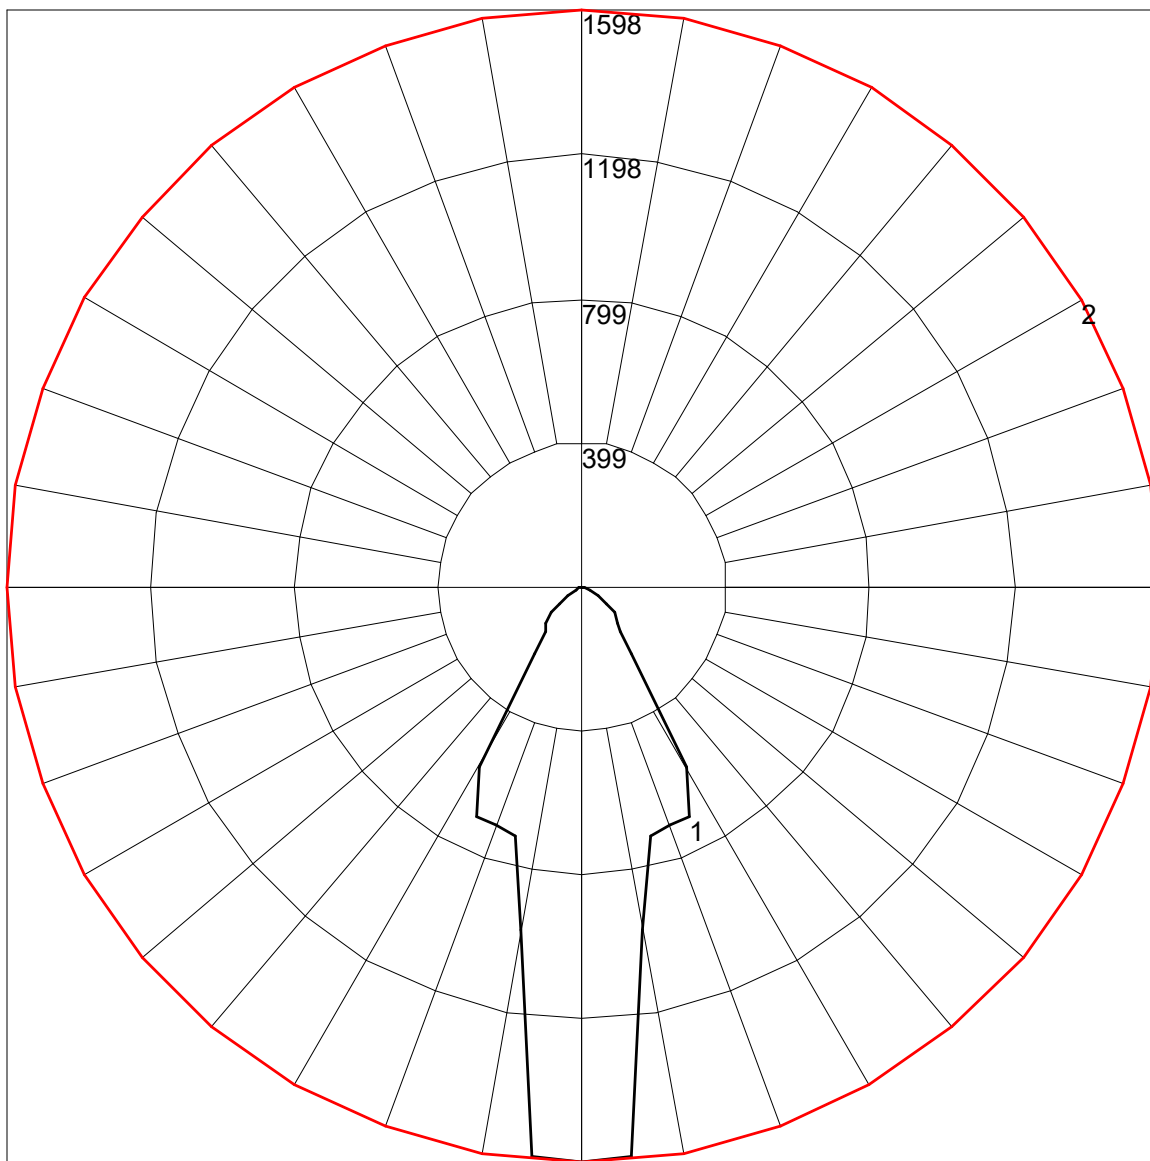

Maximum Candela = 1597.855 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (90 - 270)
2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)