



IES INDOOR REPORT

PHOTOMETRIC FILENAME : 8CR-TL-L10-940-XXX-DIM-UNV-OW-CS-XX_.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] GEN FROM BALLABS TEST NO. 20687.0

[TESTLAB] BUILDING ACOUSTICS & LIGHTING LABORATORIES, INC

[ISSUEDATE] 4-FEB-2021

[MANUFAC] WILLIAMS INDOOR

[OTHER] H.E. WILLIAMS, INC - CARTHAGE, MO

[LUMINAIRE] 1 BRIDGELUX V13 LED 8" ROUND SURFACE CYLINDER

[MORE] OPEN SEMI-SPEC SPUN ALUMINUM REFLECTOR (WIDE)

[LUMCAT] 8CR-TL-L10-940-xxx-DIM-UNV-OW-CS-xx

[LAMPCAT] V13 BXRE-35E2000

[_SEARCH_SOURCETYPE] LED

[_SEARCH_APPLICATION] Indoor, Architectural, Classroom, Commercial, Healthcare, Office, Downlight

[_SEARCH_MOUNTING] Surface

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	923
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	106
Total Luminaire Watts	8.7
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.26
Spacing Criterion (90-270)	1.26
Spacing Criterion (Diagonal)	0.98
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.48 ft (Diameter)
Luminous Width (90-270)	0.48 ft (Diameter)
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	1710	1710	1710
55	596	596	596
65	124	124	124
75	0	0	0
85	0	0	0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 8CR-TL-L10-940-XXX-DIM-UNV-OW-CS-XX_.IES

CANDELA TABULATION

	<u>0</u>
0	736.286
5	695.333
10	765.350
15	764.029
20	797.937
25	872.799
30	857.386
35	265.979
40	36.550
45	20.257
50	11.890
55	5.725
60	3.083
65	0.881
70	0.000
75	0.000
80	0.000
85	0.000
90	0.000

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 8CR-TL-L10-940-XXX-DIM-UNV-OW-CS-XX_.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	288.82	N.A.	31.30
0-30	683.00	N.A.	74.00
0-40	898.90	N.A.	97.40
0-60	921.78	N.A.	99.90
0-80	922.97	N.A.	100.00
0-90	922.97	N.A.	100.00
10-90	853.60	N.A.	92.50
20-40	610.08	N.A.	66.10
20-50	627.10	N.A.	67.90
40-70	24.07	N.A.	2.60
60-80	1.19	N.A.	0.10
70-80	0.00	N.A.	0.00
80-90	0.00	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	922.97	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	69.37
10-20	219.45
20-30	394.19
30-40	215.90
40-50	17.01
50-60	5.87
60-70	1.19
70-80	0.00
80-90	0.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT


PHOTOMETRIC FILENAME : 8CR-TL-L10-940-XXX-DIM-UNV-OW-CS-XX_.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81
4	97	90	84	80	95	89	83	79	86	82	79	84	81	78	83	79	77	75
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70
6	87	78	72	68	86	78	72	68	76	71	67	75	70	67	73	70	67	65
7	83	74	68	63	82	73	67	63	72	67	63	70	66	62	69	65	62	61
8	79	69	63	59	78	69	63	59	67	62	59	66	62	58	65	61	58	57
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	57	54	53
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	50

POLAR GRAPH

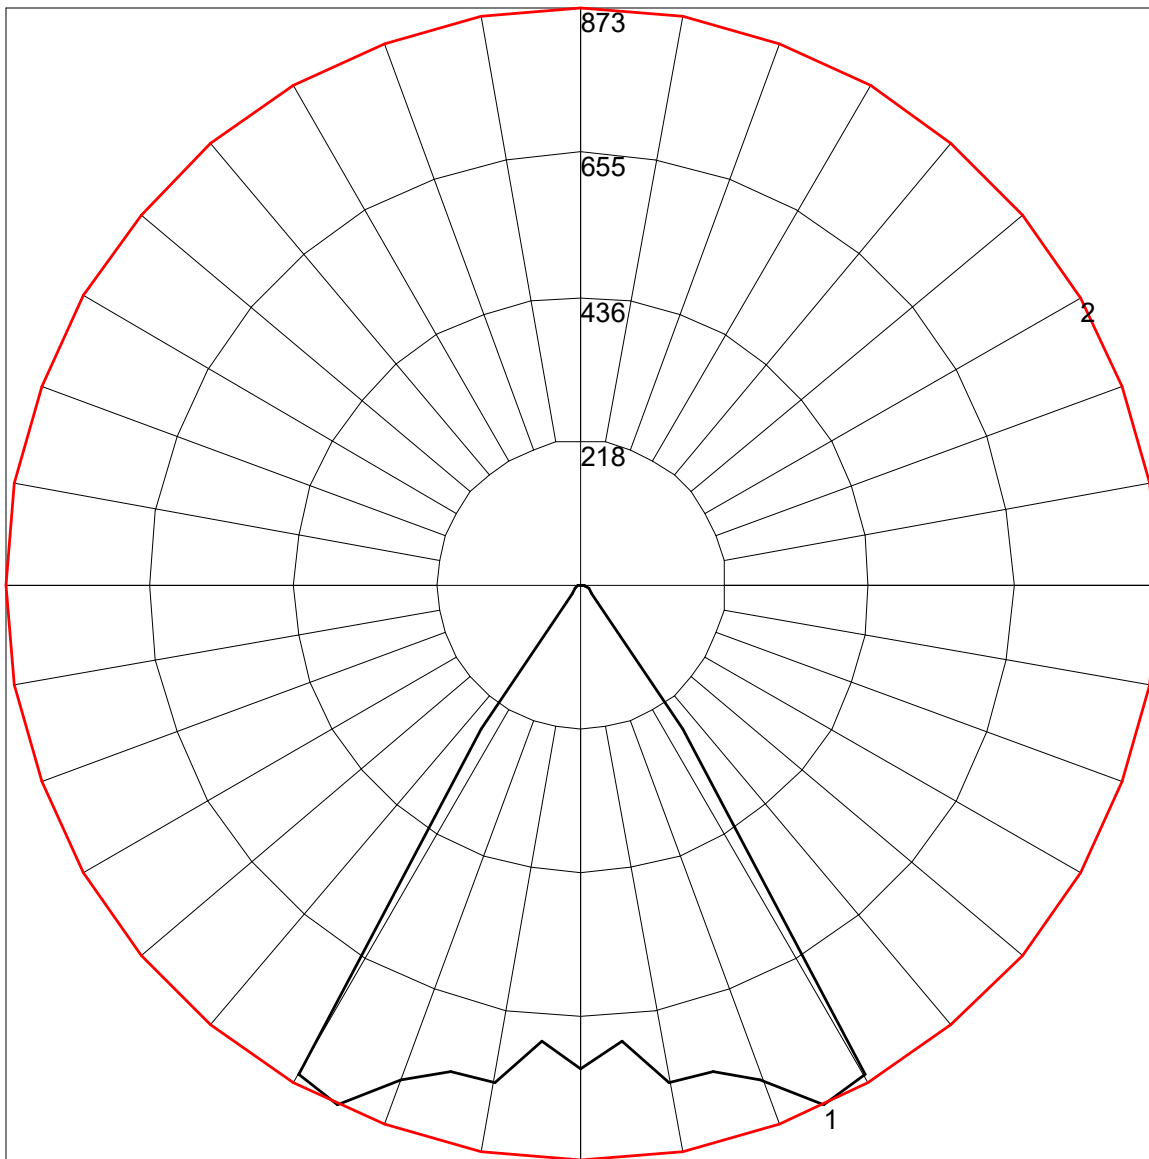

Maximum Candela = 872.799 Located At Horizontal Angle = 0, Vertical Angle = 25
1 - Vertical Plane Through Horizontal Angles (90 - 270)
2 - Horizontal Cone Through Vertical Angle (25) (Through Max. Cd.)