1SF SERIES

INSTALLATION INSTRUCTIONS




WARNING:

- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Make sure all electrical power is turned off while installing the fixture.
- This luminaire must be adequately grounded for protection against shock hazards and to assure proper operation.
- Disconnect power before servicing.

- LEDs are ESD (Electro Static Discharge) sensitive devices that can be easily damaged if the proper ESD mitigating steps are not taken.
- LEDs are very sensitive to mechanical damage. Caution must be taken to avoid damage to the LEDs.
- ESD or mechanical damage voids all warranties.
- Suitable for dry and damp locations.

BACK VIEW




NOMINAL LENGTH	ACTUAL LENGTH (A)	ACTUAL LENGTH (B)
1′	12-1/8"	7-1/2"
2′	22-5/8"	20"
3′	34-3/8"	29"
4′	46-1/4"	38"

Back of housing provided with adequate keyhole slots and knockout for mounting and wiring.


INSTALLATION

STEP 1: Remove lens as shown.




STEP 2: Using supplied keyhole slots, mount the fixture in the desired orientation.

FIG 2.1




STEP 3: Access the wiring by removing (2) palnuts as shown and hinging the wireway down.

FIG 3.1



STEP 4: Use knockout locations embossed in the fixture housing to bring incoming power into the fixture. Make electrical connections in accordance with NEC and local codes. (See FIG 4.1)

FIG 4.1

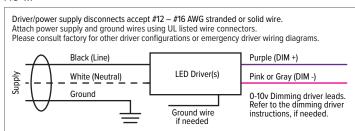

STEP 5: Reverse steps 3 and 1 to replace wireway and lens.