

CL SERIES

INSTALLATION INSTRUCTIONS




WARNING:


- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Make sure all electrical power is turned off while installing the fixture.
- This luminaire must be adequately grounded for protection against shock hazards and to assure proper operation.
- Disconnect power before servicing.
- LEDs are ESD (Electro Static Discharge) sensitive devices that can be easily damaged if the proper ESD mitigating steps are not taken.
- LEDs are very sensitive to mechanical damage. Caution must be taken to avoid damage to the LEDs.
- ESD or mechanical damage voids all warranties.
- Suitable for dry and damp locations.

FIXTURE DETAILS

BACKVIEW

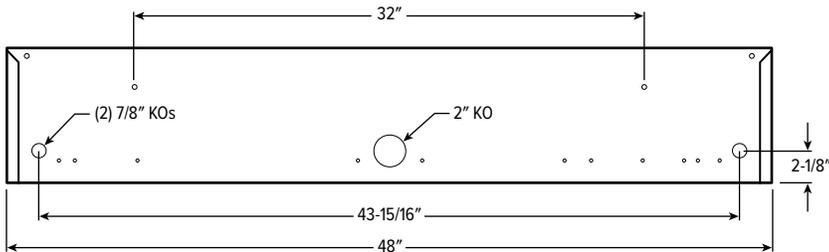

SIDEVIEW



INSTALLATION

- STEP 1:** Open fixture and remove reflector/wire way cover.
- STEP 2:** Locate the driver supply wires and knock out the appropriate K.O. for power entry. Power entry hole must be located directly in-line with supply leads from the wall.
- STEP 3:** Secure fixture to wall or ceiling using fasteners, by others, appropriate for the mounting surface.
- STEP 4:** Make electrical connections according to state and local codes. See "WIRING DIAGRAM".
- STEP 5:** Reinstall reflector/wire way cover then close the door frame.

WIRING DIAGRAM

Make electrical connections in accordance with NEC and local codes.

