

OptiMAX High Bay MANUAL



INSTALLATION

Model Numbers:

Optimax, followed by 100W, 150W, 200W, 240W; followed by LED; may be followed by BBU. "Optimax 100W LED"

AFTER INSTALLATION DELIVER THIS MANUAL TO OWNER

IMPORTANT SAFETY INSTRUCTIONS

WARNING—READ THESE INSTRUCTIONS CAREFULLY BEFORE ATTEMPTING TO INSTALL OR MAINTAIN THIS FIXTURE. WORK MUST BE DONE BY QUALIFIED PERSONNEL.

WARNING—BE CERTAIN THAT ALL ELECTRICAL POWER IS DISCONNECTED FROM THE FIXTURE BEFORE INSTALLING OR MAINTAINING THE FIXTURE.

FAILURE TO FOLLOW THESE WARNINGS MAY RESULT IN DEATH, INJURY OR SIGNIFICANT PROPERTY DAMAGE.

GROUNDING NOTE:

THESE FIXTURES MUST BE GROUNDED IN ACCORDANCE WITH NEC/CEC AND APPLICABLE LOCAL CODES AND ORDINANCES

WARNING—RE-CHECK TO BE SURE THE PROPER FIXTURE VOLTAGE LEAD HAS BEEN SELECTED TO MATCH THE SUPPLY VOLTAGE. IMPROPER WIRING MAY RESULT IN DRIVER FAILURE AND VOIDS ALL WARRANTIES.


Intended Use

Intended for mounting heights from 12 FT to 30 FT in demanding applications including hose-down and food processing areas requiring ease of cleanability, compliance to FDA/USDA requirements and ETL Sanitation certified to NSF2 Standard, Food Splash Zone. Applications include meat/poultry/food/beverage/processing, cosmetics, pharmaceuticals, and other non-hazardous environments including car wash applications.

Installation

Upon receipt of fixture, thoroughly inspect for any freight damage that should be brought to the attention of the delivery carrier. Compare the catalog number description listed on the packaging slip with the fixture label on the outside of the housing to be sure you have received the correct product. Mounting – Suspended using including hardware per diagrams below. Fixture is factory wired with waterproof power cord. DO NOT OPEN FIXTURE TO INSTALL.

Run safety cable through the cable hole noted in the picture below. Loop the cable through the cable fastener and make sure it is secure. Hook the other end of the safety cable to the mounting structure or beam

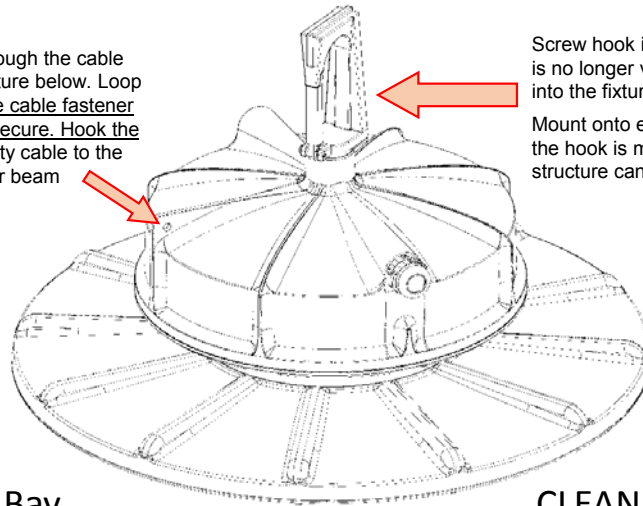

Screw hook into fixture down until threading is no longer visible and is tightly secured into the fixture

Mount onto existing support structure. Ensure the hook is mounted securely, and that the structure can bear the OptiMAX weight load

OptiMAX High Bay

CLEANING INSTRUCTIONS

- Disconnect power to equipment where necessary. Protect electrical connections from unnecessary water exposure.
- Remove large pieces of debris from surfaces to be cleaned.
- Clean as necessary with Alcojet or equivalent detergent solution, using a suitable brush where required, until all dirt and debris have been removed. Maintain water temperature approx. 160F.
- Rinse with clear water, towel or air dry before returning to service.

Model Numbers:

Optimax, followed by 100W, 150W, 200W, 240W; followed by LED; may be followed by BBU. "Optimax 100W LED"