

INSTALLATION INSTRUCTIONS

WARNING:


- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Make sure all electrical power is turned off while installing the fixture.
- This luminaire must be adequately grounded for protection against shock hazards and to assure proper operation.
- Disconnect power before servicing.
- LEDs are ESD (Electro Static Discharge) sensitive devices that can be easily damaged if the proper ESD mitigating steps are not taken.
- LEDs are very sensitive to mechanical damage. Caution must be taken to avoid damage to the LEDs.
- ESD or mechanical damage voids all warranties.
- Suitable for dry and damp locations.

FOR USE WITH:

- PTDC


WHAT IS AN ARMSTRONG DYNAMAX STRUCTURAL GRID SYSTEM?

All Williams DynaMax fixtures are designed to fit securely into DynaMax structural aluminum data center suspension systems.



STEP 1: Rotate (4) T-bar clips into position as shown.


FIG 1.0.1

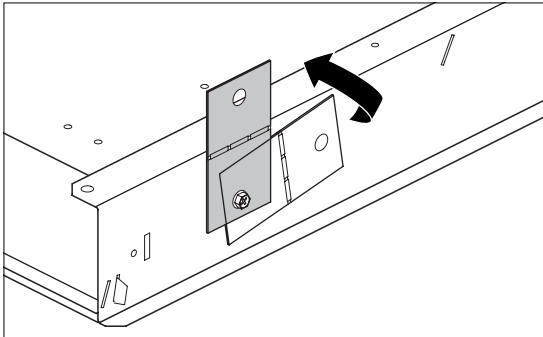

STEP 2: Raise fixture through the ceiling opening and rest in the grid system.

STEP 3: Bend T-bar clip tab down over grid system as shown and attach using 1/4-20 x 1/2" bolt, provided.

FIG 3.0.2

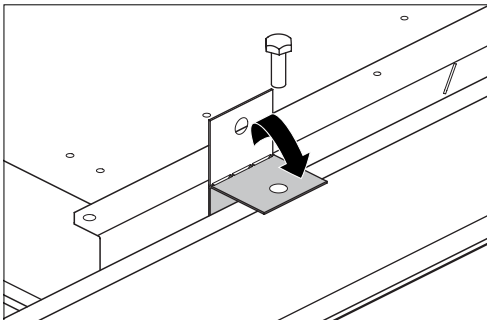

STEP 4: Refer to local codes for other installation requirements.

STEP 5: Once the fixture is installed into the ceiling system, complete necessary electrical connections per NEC and all applicable local electrical codes.

FIG 5.1 Make electrical connections in accordance with NEC and local codes.

