

CATALOG #:

TYPE:

PROJECT:



FEATURES

- Low-profile wrap-around provides uniform downward light distribution and subtle side illumination
- Shallow depth provides sleek, low-profile appearance
- Diffuser is secured continuously along luminaire sides
- Mounts easily as a single fixture or in continuous row installations
- Wireway is accessible without the use of tools
- TLED fixtures provide on-site lamping flexibility and simple installation
- Made Right Here® in the USA

ORDERING EXAMPLE: 17 - 4 - 24T8LS/B - AF - OPTIONS - UNV

SERIES	NOMINAL LENGTH	TOTAL LAMPS	LAMP SIZE	WIRING	LAMP TYPE
17	4 4'	4' Fixtures	4T8L 4' T8 LED tube	S Single end	B Type B
	8 8'	2		D Double end	
		8' Fixtures			
		4 ^[1]			
SHIELDING		OPTIONS ^[2]		VOLTAGE	
AF Frosted prismatic acrylic diffuser		GAT	T-bar fastener for 320 ceiling spacer	UNV 120-277V	
		SS-12	Single stem & canopy, 12" ^[3]		
		SWS-12	Stem & swivel canopy, 12" ^[4]		
		VBY	(2) Y-hangers		
		VBY-2	(2) Y-hangers and (2) 2' chains		

SPECIFICATIONS

- HOUSING – 20-gauge die-formed C.R.S. End plates constructed of 19-gauge die-formed C.R.S.
- SHIELDING – Frosted prismatic acrylic diffuser with 15% DR additive, .100" nominal thickness. Prismatic bottom and continuous wrap sides.
- FINISH – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL – Prewired for Type B, single or double end, non-shunted LED tubes, lamps by others. Refer to lamp manufacturer's specifications for additional requirements.
- MOUNTING – Surface or suspended.
- LISTINGS –
 - UL/CUL listed as LED surface luminaire suitable for dry or damp locations.
 - Build America, Buy America (BABA) and Buy American Act (BAA) compliant. Request certification at hew.com/buy-american
- WARRANTY – 5-year limited fixture warranty, see hew.com/warranty

NOTES


- ¹ 2-lamp cross-section only.
² Not available with EM battery options. See page 2 for MOUNTING DETAILS.

- ³ Two stem sets required. One additional stem set required for each row mounted fixture.
⁴ Two stem sets required. One additional stem set required for each row mounted fixture.



FIXTURE DETAILS

BACKVIEW

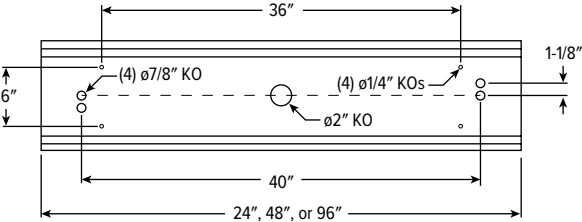

Midsection punching for 4' and 8' units only. 8' unit consists of duplicate 4' unit punching.

MOUNTING DETAILS

