


11 LED

1' Wide Surface Mount – Solid Sides



CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Fully enclosed spring-loaded cam latches allow years of hassle-free maintenance
- Mitered corners provide clean, crisp appearance with no visible rivets or screws
- Heavy-gauge welded end plates and housing ensure durable, rigid construction
- Fully gasketed door minimizes contaminants
- Maximize energy savings with efficacies as high as 124 lm/W
- Wireless in-fixture control solutions available
- Made Right Here® in the USA



SPECIFICATIONS

- HOUSING** – 20-gauge die-formed, welded C.R.S.
- DOOR FRAME** – 20-gauge C.R.S. or 0.050" extruded aluminum with mitered corners. Fully enclosed spring-loaded cam latches.
- SHIELDING** – Frosted acrylic lens, pattern #12, .125" thick.
- FINISH** – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL** – High-quality mid-power LED boards. See fixture performance data for lumen maintenance. 25°C maximum ambient operating temperature.
- MOUNTING** – Surface or suspended.
- LISTINGS** –
 - cCSAus certified as luminaire suitable for dry or damp locations.
 - Complies with the Buy American Act and other federal regulations. Request certification at hew.com/baa.
- WARRANTY** – 5-year limited warranty, see hew.com/warranty.

ORDERING EXAMPLE: 11 - 4 - L52/835 - F AF12125 - OPTIONS - CONTROL/DIM - UNV

ORDERING INFO

SERIES	LENGTH	LUMENS ^[1]	CRI	CCT	DOOR FRAME	SHIELDING
11	2 2'	2'	8 80	27 2700K	F White flat aluminum	AF12125 Frosted acrylic, pattern #12, .125" thick
	4 4'	L26 2,600lm		30 3000K	R White regressed aluminum	
		L33 3,300lm		35 3500K	S White flat steel	
		4'		40 4000K	FB Black flat aluminum	
		L52 5,200lm		50 5000K	RB Black regressed aluminum	
		L65 6,500lm			SB Black flat steel	

OPTIONS ^[2]

EM/10W 10-watt emergency battery
(L___) Additional lower lumen packages available. ^[4]
Example: 4,000 nominal lumens =
11-4-L52/840-FAF12125-(L40)

CONTROL ^[3]

See page 5 for **ADDITIONAL CONTROL OPTIONS**.

–	None
AVI-LVFA	Avi-on wireless fixture control ^[5]
AVI-LVFA-CS2-PIR	Avi-on wireless fixture control with PIR motion and daylight sensor ^[6]
AWNRR	Lutron Athena wireless node integral fixture control, RF only ^[7]
AWNS	Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing ^[8]

DRIVER

See page 5 for **ADDITIONAL DRIVER OPTIONS**.

- DIM** Driver with external dimming wires
- DRV** Driver without external dimming wires
- DA** Driver with 12V auxiliary power, without external dimming wires ^[9]
- DSR** Sensor-ready driver without external dimming wires (DAi DALI-2) ^[10]

VOLTAGE

120 120V
277 277V
UNV 120-277V

NOTES

- Lumen output based on 3500 CCT. Actual lumens may vary +/-5%, see page 2 for **FIXTURE PERFORMANCE DATA**. Additional lumen package available, see options
- See page 2 for **FINISH OPTIONS**. Custom colors available upon request. Suspended mounting available. See page 3 for **SUSPENDED MOUNTING DETAILS**.
- See page 4 for **AVI-ON BLUETOOTH WIRELESS CONTROL DETAILS**. See page 3 for **SENSOR & NODE PLACEMENT DETAILS**.

- Specify in increments of 100 nominal lumens. Option must be specified with next higher lumen package.
- DA Driver only.
- DA Driver only.
- DA and DSR Drivers only.
- DA and DSR Drivers only.
- Avi-on and Lutron Athena Controls only.
- Lutron Athena Controls only.



11 LED

1' Wide Surface Mount – Solid Sides

FIXTURE PERFORMANCE DATA

	LED PACKAGE	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
2'	L26	2,555	20.5	125
	L33	3,387	30.0	113
4'	L52	5,101	42.3	121
	L65	6,527	57.0	115


- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Wattage shown is average for 120V through 277V input.
- Results based on 3500K, 80 CRI, actual lumens may vary +/-5%
- Predicted lumen maintenance calculated from LED manufacturer IES LM-80 data and In situ temperature measurement.
- Predicted lumen maintenance calculated in accordance with IES TM-21 per Energy Star (R) TM-21 Calculator rev. 02.08.16.
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.
- Use multiplier table to calculate additional options.

MULTIPLIER TABLE

COLOR TEMPERATURE	
CCT	CONVERSION FACTOR
2700K	0.97
3000K	0.99
3500K	1.00
4000K	1.03
5000K	1.06

PHOTOMETRY

11-4-L52/835-SAF12125-DIM-UNV Total Luminaire Output: 5101 lumens; 42.3 Watts | Efficacy: 121 lm/W | 80 CRI; 3500K CCT




VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0°	2363	2363	2363	
5°	2347	2342	2342	222
15°	2195	2191	2185	623
25°	1949	1928	1914	893
35°	1624	1582	1540	983
45°	1243	1174	1117	899
55°	814	747	691	675
65°	492	442	421	448
75°	252	236	246	262
85°	88	88	99	96
90°	0	0	0	


LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1738	34
	0 - 40	2721	53
	0 - 60	4295	84
	0 - 90	5101	100
	0 - 180	5101	100

FIXTURE DETAILS

BACKVIEWS

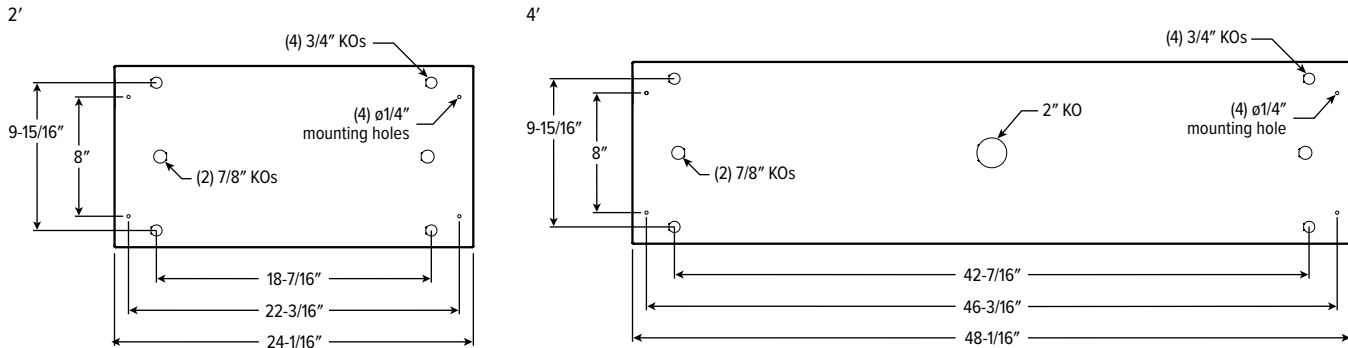

FINISH OPTIONS

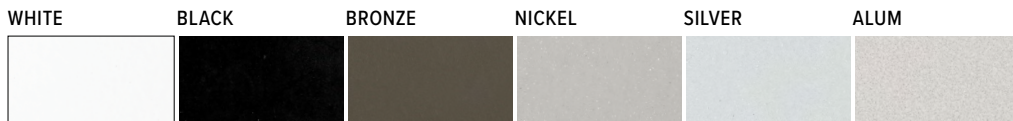

For custom color, please specify RAL code or a manufacturer code with description. All custom colors other than RAL require two sample swatches, minimum 1" square.



11

LED

1' Wide Surface Mount – Solid Sides

SUSPENDED MOUNTING DETAILS

AIRCRAFT CABLE

ORDERING EXAMPLE: ACF*4P/D48			
PREFIX		TYPE	LENGTH
ACF*4P	Four point mount adjustable aircraft cable	D 1" grid & hardpan N 9/16" grid S Slot grid	24 24"
			48 48"
			96 96"
			144 144"
			192 192"
			240 240"
			300 300"


CORD OPTIONS

Units specified with aircraft cable require cord. Please specify cord type using ordering information below. Long fixture rows may require multiple feed points based on 18ga conductor size.

EXAMPLE: S2438D/W				
CORD TYPE	LENGTH	# OF COND. ^[1]	WIRE SIZE	COLOR
S	24 24"	3	8D 18ga	/W White /B Black
	48 48"	4		
	96 96"	5		
		6		


¹ Includes (2) 22ga purple & pink dimming conductors

STANDARD HARDWARE (Grid & Hardpan)



- Fixtures are provided with adjustable length aircraft cables and mounting hardware, must specify.
- One 5" canopy used at power feed location to cover the junction box. Three other suspension points use 2" canopy at the non-feed point. No J-box is required at non-feed points.

SENSOR & NODE PLACEMENT DETAILS

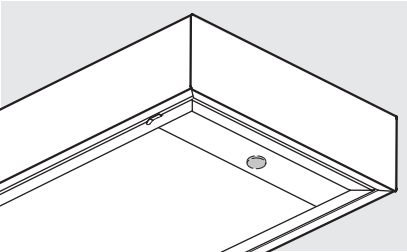

SEE NEXT PAGE FOR CONTROL DETAILS.



11 LED 1' Wide Surface Mount – Solid Sides

AVI-ON BLUETOOTH WIRELESS CONTROL DETAILS

FEATURES

Simple

- Gateway-free distributed control
- Factory pre-commissioning
- Contractor friendly installation
- Occupancy/vacancy/daylight sensing

Scalable

- Virtually unlimited network size
- Spans small offices to large warehouses
- Flexible control strategies

Secure

- Optional cloud connectivity
- UL IoT platinum security rating
- DLC 5.0 compliant

COMMISSIONING & INSTALLATION TOOLS

Avi-on mobile apps provide intuitive, quick installation and commissioning. Pro tools are available to qualified installers. Live commissioning training and on-site or remote support by Avi-on must be ordered separately through Avi-on.



Commissioning
Mobile App




Zone Scanner
Web App



Commissioning
Pro App

SYSTEM COMPONENTS

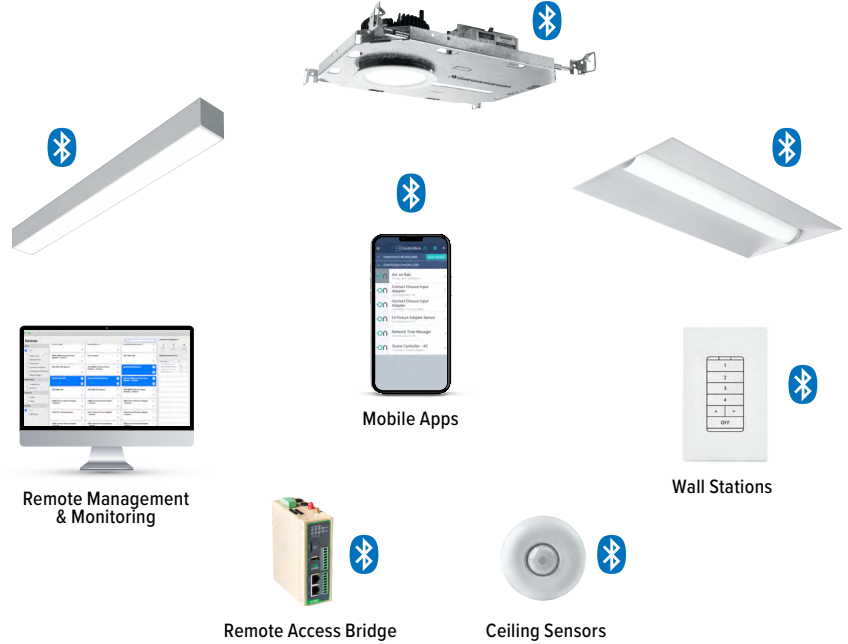

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Avi-on is under license. Other trademarks and trade names are those of their respective owners.

ACCESSORIES

WALL STATIONS	
AVI-2401AC	Scene controller - numbered 1-4, 120-277VAC
AVI-2402BAT	Scene controller - numbered 1-4, battery powered
AVI-2401AC-2	Dimmer with presets - percentages, 120-277VAC
AVI-2402BAT-2	Dimmer with presets - percentages, battery powered
AVI-2401AC-3	On/off/dimming, 120-277VAC
AVI-2402BAT-3	On/off/dimming, battery powered

NETWORK	
AVI-RAB-LTE	Remote access bridge – LTE connection
AVI-2001RAB-01-C	Remote access bridge – Wifi connection
AVI-KIT-NTM	Network time manager with battery backup
CEILING MOUNT SENSORS	
AVI-KIT-SEN-DUCM	PIR motion and ultrasonic sensor kit
AVI-KIT-SEN-ICM	PIR motion and photocell sensor kit

For load controllers and additional accessory info, see hew.com/avi-on



AVI-LVFA-CS2-PIR Avi-on wireless fixture control with PIR motion and daylight sensor. DA Driver only.

SPECIFICATIONS	
TYPE	PIR Motion + Daylight
MOUNTING HEIGHT	8' – 10'
DETECTION ANGLE	360°
TEMPERATURE RANGE	-30° to 50°C
RELATIVE HUMIDITY	10 to 80% non-condensing
IP RATING	IP20
MANUFACTURER	Avi-On

SENSOR COVERAGE PATTERNS

Side View

8' height: Ø24' coverage



SENSOR DETAIL



Dimensions: 13/16" x 2-1/4"



11 LED 1' Wide Surface Mount – Solid Sides

ADDITIONAL CONTROL OPTIONS


AWNS Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing. DA and DSR Drivers only.

SPECIFICATIONS	
TYPE	Radio Frequency
MOUNTING HEIGHT	8' – 12'
DETECTION ANGLE	360°
TEMPERATURE RANGE	0° to 55°C
RELATIVE HUMIDITY	0 to 90%, non-condensing
COMMISSIONING	Clear Connect gateway – Type X with app (iOS or Android)
MANUFACTURER	Lutron



SENSOR COVERAGE PATTERNS

9' height: ø12' coverage



Motion Sensor Coverage

CEILING HEIGHT	COVERAGE AREA (SQ FT)
8'	114
9'	144
10'	178
12'	256

SENSOR DETAIL



Dimensions: ø1-1/8"

ATHENA CONTROL OPTIONS

CATALOG NUMBER	DESCRIPTION
AWNDR	Lutron Athena wireless node integral fixture control, RF only, for use with D4i DALI-2 or driver with 12V auxiliary power
AWNS	Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing, for use with D4i DALI-2 or driver with 12V auxiliary power
AWNDR-BL	Lutron Athena wireless node integral fixture control, RF only, for use with D4i DALI-2 or driver with 12V auxiliary power, black finish
AWNS-BL	Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing, for use with D4i DALI-2 or driver with 12V auxiliary power, black finish

ADDITIONAL DRIVER OPTIONS

Note: Lumen restrictions apply, consult product builder at hew.com/product-builder.

CATALOG NUMBER	DESCRIPTION
DRV	Driver prewired for non-dimming applications
DIM	Dimming driver prewired for 0-10V low voltage applications
DIM1	1% dimming driver prewired for 0-10V low voltage applications
DIM LINE	Line voltage dimming driver (TRIAC and ELV compatible, 120V only)
DIM TRC	Line voltage dimming driver (TRIAC compatible, 120V only)
DA	Driver with 12V auxiliary power
DSR	Sensor-ready driver (D4i DALI-2)
SD40	40% step-dimming driver
SD50	50% step-dimming driver
DALI	DALI dimming driver
LDE1	Lutron Hi-lume 1% EcoSystem dimming LED driver

