



17 TLED Narrow Low-Profile Wrap

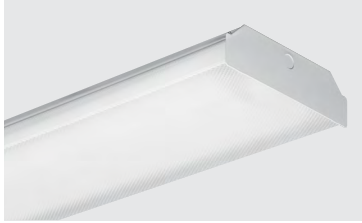

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Low-profile wrap-around provides uniform downward light distribution and subtle side illumination
- Shallow depth provides sleek, low-profile appearance
- Diffuser is secured continuously along luminaire sides
- Mounts easily as a single fixture or in continuous row installations
- Wireway is accessible without the use of tools
- TLED fixtures provide on-site lamping flexibility and simple installation
- Available on QuickShip
- Made Right Here® in the USA

SPECIFICATIONS

- HOUSING** – 20-gauge die-formed C.R.S. End plates constructed of 19-gauge die-formed C.R.S.
- SHIELDING** – Clear prismatic acrylic diffuser with 15% DR additive, .100" nominal thickness. Prismatic bottom/continuous wrap sides.
- FINISH** – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL** – Prewired for Type B, single or double end, non-shunted LED tubes, lamps by others.
- MOUNTING** – Surface or suspended.
- LABELS** – UL/CUL listed as LED surface luminaire suitable for dry or damp locations.
- WARRANTY** – 5-year limited fixture warranty, see hew.com/warranty.

ORDERING EXAMPLE: 17 - 4 - 24T8LS/B - A - OPTIONS - UNV

ORDERING INFO

| SERIES | NOMINAL LENGTH | TOTAL LAMPS | LAMP SIZE | WIRING | LAMP TYPE | SHIELDING |
|--------|----------------|--------------------------------------|---------------------|-----------------------------|-----------|------------------------------------|
| 17 | 4 4' | 4' Fixtures | 4T8L 4' T8 LED tube | S Single end ^[2] | B Type B | A Clear prismatic acrylic diffuser |
| | 8 8' | 2 8' Fixtures 4 ^[1] | | D Double end | | |

OPTIONS ^[3]

| OPTION | DESCRIPTION | VOLTAGE |
|--------|---------------------------------------|--------------|
| GAT | T-bar fastener for 320 ceiling spacer | UNV 120-277V |
| SS-12 | Single stem & canopy, 12" | |
| SWS-12 | Stem & swivel canopy, 12" | |
| VBY | (2) Y-hangers | |
| VBY-2 | (2) Y-hangers and (2) 2' chains | |

QUICKSHIP

17-4-24T8LS/B-A-QS-UNV

NOTES

¹ 2-lamp cross-section only.

² Due to differences in wiring of TLED lamps, samples of specified lamp must be provided at time of fixture order.


³ See page 2 for MOUNTING ACCESSORIES DETAILS.



17 TLED

Narrow Low-Profile Wrap


BACK VIEW DETAILS

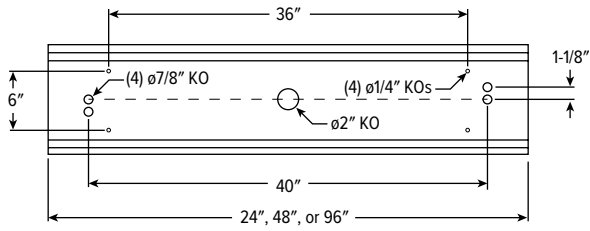


Note: Midsection punching for 4' and 8' units only.
8' unit consists of duplicate 4' unit punching.

MOUNTING ACCESSORIES DETAILS


GAT FASTENER



SINGLE STEM & CANOPY



STEM & SWIVEL CANOPY



VBY HANGER

