

CATALOG #: _____

TYPE: _____

PROJECT: _____



FEATURES

- Low-profile wrap-around provides uniform downward light distribution and subtle side illumination
- Shallow depth provides sleek, low-profile appearance
- Diffuser is secured continuously along luminaire sides
- Mounts easily as a single fixture or in continuous row installations
- Wireway is accessible without the use of tools
- TLED fixtures provide on-site lamping flexibility and simple installation
- Made Right Here® in the USA

SPECIFICATIONS

- HOUSING** – 20-gauge die-formed C.R.S. End plates constructed of 19-gauge die-formed C.R.S.
- SHIELDING** – Frosted prismatic acrylic diffuser with 15% DR additive, .100" nominal thickness. Prismatic bottom and continuous wrap sides.
- FINISH** – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL** – Prewired for Type B, single or double end, non-shunted LED tubes, lamps by others.
- MOUNTING** – Surface or suspended.
- LISTINGS** –
 - UL/CUL listed as LED surface luminaire suitable for dry or damp locations.
 - Complies with the Buy American Act and other federal regulations. Request certification at hew.com/baa.
- WARRANTY** – 5-year limited fixture warranty, see hew.com/warranty.

ORDERING EXAMPLE: 17 - 4 - 24T8LS/B - AF - OPTIONS - UNV

ORDERING INFO

SERIES	NOMINAL LENGTH	TOTAL LAMPS	LAMP SIZE	WIRING	LAMP TYPE
17	4 4'	4' Fixtures	4T8L 4' T8 LED tube	S Single end ^[2]	B Type B
	8 8'	2 8' Fixtures 4 ^[1]		D Double end	

SHIELDING	OPTIONS ^[3]	VOLTAGE
AF Frosted prismatic acrylic diffuser	GAT T-bar fastener for 320 ceiling spacer SS-12 Single stem & canopy, 12" ^[4] SWS-12 Stem & swivel canopy, 12" ^[5] VBY (2) Y-hangers VBY-2 (2) Y-hangers and (2) 2' chains	UNV 120-277V

NOTES


- 2-lamp cross-section only.
- Due to differences in wiring of TLED lamps, samples of specified lamp must be provided at time of fixture order.
- Not available with EM battery options. See page 2 for MOUNTING DETAILS.
- Two stem sets required. One additional stem set required for each row mounted fixture.
- Two stem sets required. One additional stem set required for each row mounted fixture.



17 TLED Low-Profile Wrap

FIXTURE DETAILS

BACKVIEW

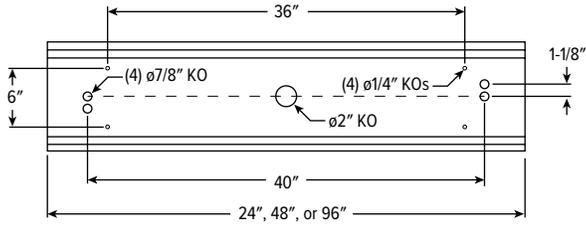

Midsection punching for 4' and 8' units only. 8' unit consists of duplicate 4' unit punching.

MOUNTING DETAILS

