

CATALOG #: _____

TYPE: _____

PROJECT: _____

NEW CONSTRUCTION AND REMODEL

FEATURES

- Create scalable, highly functioning smart buildings with Platformatics Power over Ethernet controls
- Tunable white from 2700K to 5000K CCT, minimum 80 CRI

SPECIFICATIONS

- **HOUSING** – Die-cast aluminum trim housing with forged aluminum heat sink. Galvanized steel splice compartment with driver mounting plate/enclosure. Swing-out mounting arms field adjust for ceiling thickness from 1/2" – 2-1/4".
- **OPEN REFLECTOR** – Low-iridescent anodized aluminum.
- **LENSED TRIM** – Die-cast aluminum frame with micro-prismatic, tempered glass lens.
- **ELECTRICAL** – High-performance Class 2 LED array. Modular quick-connect plug for easy field-connection of LED light assembly to driver. Reported L70>50,000 hours. Low-voltage DC fixture, to be fed by Class 2 power supply. Tunable White products use LEDs of multiple CCTs and may produce a perceptibly different shade of white from single-CCT products at the same CCT. All CCTs are within 3 MacAdam ellipses.
- **MOUNTING** – Recessed. 20 ga. galvanized steel mounting pan for new construction or IC-rated enclosure. Remodel kit option includes receiver bracket hardware. Minimum 24" O.C. marked spacing required for P35 and P49 lumen packages.
- **LISTINGS** –
 - cCSAus conforms to UL STD 1598; Certified to CAN/CSA STD C22.2 No. 250.0 for damp locations. LED light assembly conforms to UL 2108 for remote installation.
 - Suitable for wet location under covered ceiling when specified with WET/CC option.
 - IC-rated for direct contact with insulation when specified with I Mounting Type.
 - City of Chicago Environmental Air approved when specified with CP option.
 - Complies with ASTM-E283 when specified with ATH option.
 - RoHS compliant.
- **WARRANTY** – 5-year limited warranty, see hew.com/warranty.

SYSTEM REQUIREMENTS

- PoE-ready luminaires are connected to building power systems through network integration and require other components for complete PoE lighting system
- For additional PoE info, see hew.com/poe
- Consult factory for design support



ORDERING EXAMPLE: 4DS - P22/835 - OPTIONS - POE PR - LW - OF - WH - TRIM OPTIONS - N - F1
 HOUSING TRIM MOUNT.

HOUSING

SERIES	LUMENS ^[1]	CRI	CCT	OPTIONS	CONTROL ^[2]
4DS	P11 1,100lm	8 80	27 2700K	ATH Airtight construction ^[6]	POE PR Power over Ethernet, Platformatics-ready
	P22 2,200lm	9 90 ^[4]	30 3000K	CP Chicago plenum (CCEA) ^[7]	
	P35 3,500lm		35 3500K		
	P49 4,900lm ^[3]		40 4000K		
			50 5000K		
			TW Tunable white (80 CRI, 2700K–5000K) ^[5]		

TRIM ^[8]

TRIM TYPE	DISTRIBUTION ^[9]	FLANGE TYPE	REFLECTOR FINISH	TRIM OPTIONS
L Flush lens	W Wide	OF 1/2" standard flange	Open trim types	MWT Textured white trim flange ^[15]
O Open reflector	55° Open	SF 1/4" mud-in flange ^[14]	CS Clear semi-specular anodize	IP IP65 rated trim ^[16]
R Regressed lens	60° Flush		SG Satin-glow anodize	AD Diffuse acrylic lens ^[17]
A Angled lens ^[10]	60° Regressed		GD Gold anodize	PD Diffuse 1/8" polycarbonate lens ^[18]
	M Medium ^[11]		CG Champagne gold anodize	WET/CC Wet location, covered ceiling listed ^[19]
	45° Open		PW Pewter anodize	AM Anti-microbial ^[20]
	35° Flush		SPC Clear specular anodize	
	35° Regressed		RG Rose gold anodize	
	N Narrow ^[12]		Lens trim types	
	40° Open		CS Clear semi-specular powder coat	
	25° Flush		WH White texture powder coat	
	25° Regressed		BL Black texture powder coat	
	WW Wall wash ^[13]		MB Black texture splay with white flange ^[21]	

MOUNTING

MOUNTING TYPE ^[22]

- N Open pan for new construction
- I IC-rated enclosure for new construction ^[24]
- R Remodel kit ^[25]

MOUNTING HARDWARE ^[23]

- F1 Integral 2-position fixed pan bracket, universal bar hanger included ^[26]
- BA1 Adjustable butterfly pan bracket, bar hanger not included ^[27]
- CA1 Adjustable caterpillar pan bracket, universal bar hanger included ^[28]

NOTES

- Static white lumen output based on L trim type, W distribution and WH finish, 80 CRI, 3000K for single CCT and 4000K for TW. Actual lumens may vary +/-5%, see page 2 for FIXTURE PERFORMANCE DATA.
- See page 5 for . For additional PoE info, see hew.com/poe.
- N Mounting Type only.
- Extended lead times may apply. Consult factory for availability. Not available with Tunable White.
- P11 and P22 lumen packages only.
- I Mounting Type required.
- I Mounting Type required. P11 lumen package only.
- Trim ships separately.
- Beam angle based on CS or WH reflector finish.
- Available with WW Distribution only.
- Not available with P49.
- Not available with P49.
- O and A Trim Types only.
- For use with mud-in plaster construction only, supplied with mud flange installation kit. See page 4 for FLANGE TYPE DETAILS. Not available with ATH or IP options.
- Not available with WH Reflector Finish or L Trim Type.
- L and R trim types only.
- Not available with O trim type. W distribution only.
- Not available with O trim type. W distribution only.
- Not available with O Trim Type.
- WH and BL Reflector Finishes only.
- R Trim Type only. Not available with MWT.
- Mounting hardware required (N and I only), ordered separately, see MOUNTING HARDWARE ordering info. See page 5 for MOUNTING TYPE DETAILS.
- Additional mounting hardware options available. See page 5 for MOUNTING HARDWARE DETAILS.
- P11 lumen package only.
- Also used in new construction sheetrock ceilings. P11 and P22 lumen packages only.
- N and I Mounting Types only. I Mounting requires external brackets.
- N Mounting Type only.
- N Mounting Type only.

FIXTURE PERFORMANCE DATA

STANDARD

OPEN REFLECTOR TRIM TYPE

	DISTRIBUTION	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
P11	W	1101	12.3	89.9
	M	1215	12.3	99.2
	N	1241	12.3	101.3
P22	W	2067	25.0	82.7
	M	2281	25.0	91.2
	N	2331	25.0	93.3
P35	W	3221	37.5	85.9
	M	3510	37.5	93.6
	N	3417	37.5	91.1
P49	W	4543	50.0	90.9
	M	-	-	-
	N	-	-	-

TUNABLE WHITE

OPEN REFLECTOR TRIM TYPE

	DISTRIBUTION	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
P11	W	956	12.3	78.1
	M	1051	12.3	85.8
	N	1074	12.3	87.7
P22	W	1944	25.0	77.8
	M	2118	25.0	84.7
	N	2062	25.0	82.5
P35	W	-	-	-
	M	-	-	-
	N	-	-	-
P49	W	-	-	-
	M	-	-	-
	N	-	-	-

FLUSH LENS TRIM TYPE

	DISTRIBUTION	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
P11	W	1193	12.3	97.4
	M	1310	12.3	107.0
	N	1330	12.3	108.6
P22	W	2239	25.0	89.6
	M	2469	25.0	98.8
	N	2495	25.0	99.8
P35	W	3488	37.5	93.0
	M	3799	37.5	101.3
	N	3657	37.5	97.5
P49	W	4919	50.0	98.4
	M	-	-	-
	N	-	-	-

FLUSH LENS TRIM TYPE

	DISTRIBUTION	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
P11	W	1031	12.3	84.2
	M	1138	12.3	92.9
	N	1150	12.3	93.8
P22	W	2105	25.0	84.2
	M	2293	25.0	91.7
	N	2207	25.0	88.3
P35	W	-	-	-
	M	-	-	-
	N	-	-	-
P49	W	-	-	-
	M	-	-	-
	N	-	-	-

REGRESSED LENS TRIM TYPE

	DISTRIBUTION	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
P11	W	1147	12.3	93.6
	M	1292	12.3	105.4
	N	1310	12.3	107.0
P22	W	2151	25.0	86.0
	M	2425	25.0	97.0
	N	2469	25.0	98.8
P35	W	3352	37.5	89.4
	M	3732	37.5	99.5
	N	3619	37.5	96.5
P49	W	4727	50.0	94.5
	M	-	-	-
	N	-	-	-

REGRESSED LENS TRIM TYPE


	DISTRIBUTION	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
P11	W	991	12.3	80.9
	M	1117	12.3	91.2
	N	1138	12.3	92.9
P22	W	2023	25.0	80.9
	M	2252	25.0	90.1
	N	2184	25.0	87.4
P35	W	-	-	-
	M	-	-	-
	N	-	-	-
P49	W	-	-	-
	M	-	-	-
	N	-	-	-

MULTIPLIER TABLES

	COLOR TEMPERATURE		
	CCT	LUMENS	
		STANDARD	TUNABLE WHITE
80 CRI	2700K	0.92	0.83
	3000K	0.98	1.00
	3500K	1.00	0.99
	4000K	1.01	1.00
	5000K	1.02	0.98
90 CRI	2700K	0.76	-
	3000K	0.79	-
	3500K	0.82	-
	4000K	0.84	-
	5000K	0.88	-

OPEN REFLECTOR FINISH		
CATALOG NUMBER	REFLECTOR FINISH	CONVERSION FACTOR
CS	Clear semi-specular	1.00
SG	Satin-glow	0.92
GD	Gold	0.93
CG	Champagne Gold	0.96
PW	Pewter	0.86
SPC	Specular	1.02
RG	Rose Gold	0.88
WH	White, textured	0.89
BL	Black, textured	0.79

TRIM	
CATALOG NUMBER	CONVERSION FACTOR
AD	0.85
PD	0.85




- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Standard results based on 3500K/80 CRI, actual lumens may vary +/-5%
- Tunable white results based on 4000K/80 CRI, actual lumens may vary +/-5%
- Use multiplier tables to calculate additional options.



4DS PoE | tunable **WHITE** 4.5" Downlight – Square

PHOTOMETRY


4DS-P22/835-POE PR-LW-OF-WH Total Luminaire Output: 2239 lumens; 25.0 Watts | Efficacy: 89.6 lm/W | 80 CRI; 3500K CCT



CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
		0°	45°	90°	
	0	1665	1665	1665	
	5	1650	1650	1651	157
	15	1556	1579	1589	442
	25	1208	1367	1211	575
	35	547	831	536	421
	45	346	375	343	281
	55	209	215	208	193
	65	110	107	108	111
	75	46	45	46	50
	85	5	4	6	9
	90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1173	52
	0 - 40	1594	71
	0 - 60	2069	92
	0 - 90	2239	100
	0 - 180	2239	100


4DS-P22/835-POE PR-LM-OF-WH Total Luminaire Output: 2469 lumens; 25.0 Watts | Efficacy: 98.8 lm/W | 80 CRI; 3500K CCT



CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
		0°	45°	90°	
	0	6627	6627	6627	
	5	6386	6345	6316	576
	15	3827	3850	3757	1043
	25	1039	1082	938	525
	35	235	270	208	172
	45	84	92	79	70
	55	44	46	44	42
	65	27	26	27	26
	75	11	11	10	12
	85	2	1	2	3
	90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	2144	87
	0 - 40	2316	94
	0 - 60	2428	98
	0 - 90	2469	100
	0 - 180	2469	100


4DS-P22/835-POE PR-LN-OF-WH Total Luminaire Output: 2495 lumens; 25.0 Watts | Efficacy: 99.8 lm/W | 80 CRI; 3500K CCT



CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
		0°	45°	90°	
	0	10437	10437	10437	
	5	9460	9301	9373	813
	15	3925	3659	3507	1069
	25	824	722	637	391
	35	172	163	133	111
	45	64	68	58	51
	55	35	35	33	32
	65	20	19	19	19
	75	10	9	9	9
	85	0	0	0	1
	90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	2273	91
	0 - 40	2384	96
	0 - 60	2466	99
	0 - 90	2495	100
	0 - 180	2495	100

4DS-P22/835-POE PR-OWW-OF-CS Total Luminaire Output: 1920 lumens; 25 Watts | Efficacy: 76.8 lm/W | 80 CRI; 3500K CCT




CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
		0°	45°	90°	135°	180°	
	0	2032	2032	2032	2032	2032	
	5	2030	2020	2022	2024	2023	190
	15	1731	1749	1741	1826	1814	493
	25	1183	1237	1132	1291	1143	546
	35	676	633	446	614	524	370
	45	495	291	146	211	195	198
	55	299	92	21	34	23	81
	65	181	20	0	0	0	32
	75	61	0	0	0	0	10
	85	0	0	0	0	0	0
	90	0	0	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1229	64
	0 - 40	1599	83
	0 - 60	1878	98
	0 - 90	1920	100
	0 - 180	1920	100



4DS PoE | tunable **WHITE** 4.5" Downlight – Square


4DS-P22/835-POE PR-OM-OF-CS Total Luminaire Output: 2281 lumens; 25.0 Watts | Efficacy: 91.2 lm/W | 80 CRI; 3500K CCT



VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0	4068	4068	4068	
5	3908	3868	3869	356
15	2823	2795	2791	776
25	1505	1489	1495	695
35	487	608	473	352
45	69	142	66	91
55	7	11	7	11
65	0	0	0	0
75	0	0	0	0
85	0	0	0	0
90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1827	80
	0 - 40	2180	96
	0 - 60	2281	100
	0 - 90	2281	100
	0 - 180	2281	100


4DS-P22/835-POE PR-RM-OF-WH Total Luminaire Output: 2425 lumens; 25.0 Watts | Efficacy: 97.0 lm/W | 80 CRI; 3500K CCT




VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0	6479	6479	6479	
5	6249	6176	6141	561
15	3807	3787	3710	1028
25	1030	1101	1051	541
35	205	278	228	174
45	67	86	69	63
55	37	38	35	33
65	19	17	19	17
75	4	3	3	5
85	0	0	0	1
90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	2130	88
	0 - 40	2305	95
	0 - 60	2401	99
	0 - 90	2425	100
	0 - 180	2425	100


TRIM TYPE DETAILS

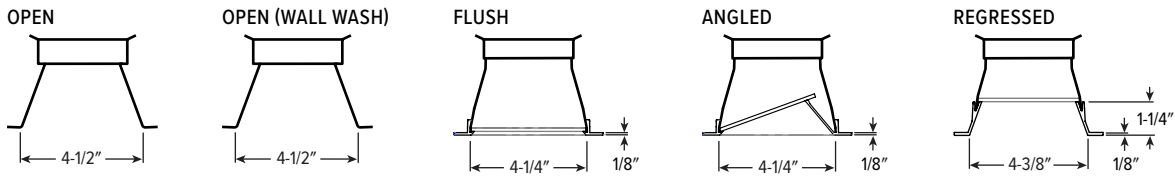

FLANGE TYPE DETAILS

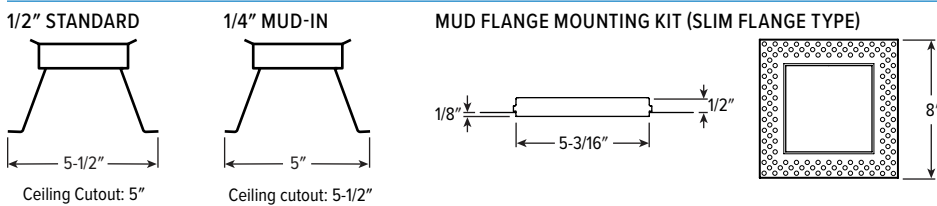


REFLECTOR FINISH DETAILS

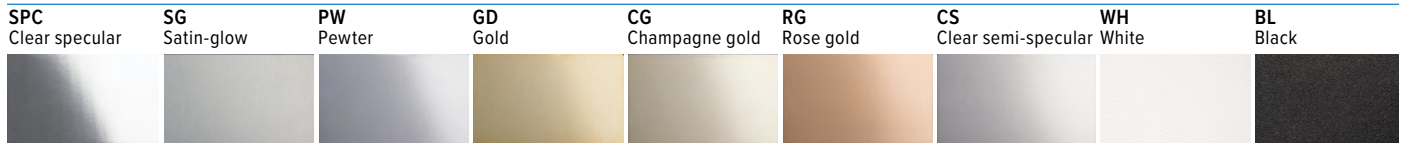



4DS PoE | tunable **WHITE** 4.5" Downlight – Square

MOUNTING TYPE DETAILS


NEW CONSTRUCTION




IC-RATED




REMODEL



Receiver Bracket

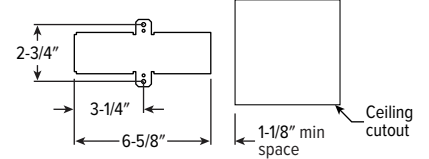


Driver and Junction Box




MOUNTING HARDWARE DETAILS


F1 Integral 2-position fixed pan bracket, universal bar hanger included

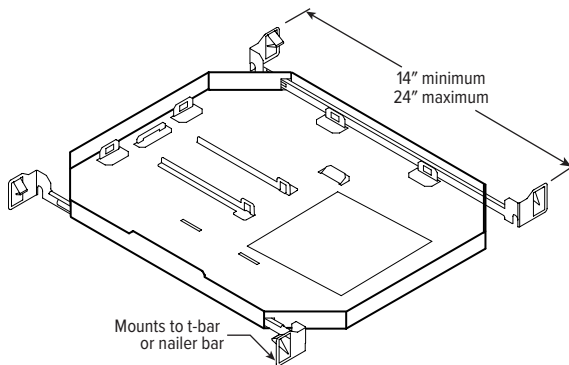


BA1 Adjustable butterfly pan bracket, bar hanger not included (N Mounting Type only)





CA1 Adjustable caterpillar pan bracket, universal bar hanger included (N Mounting Type only)

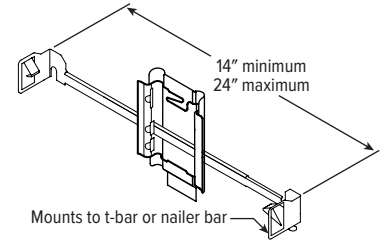

BA2 Adjustable butterfly pan bracket, heavy-duty universal bar hanger included (N Mounting Type only)

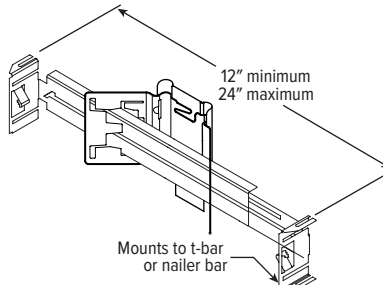

CA2 Adjustable caterpillar pan bracket, t-bar hanger included (N Mounting Type only)

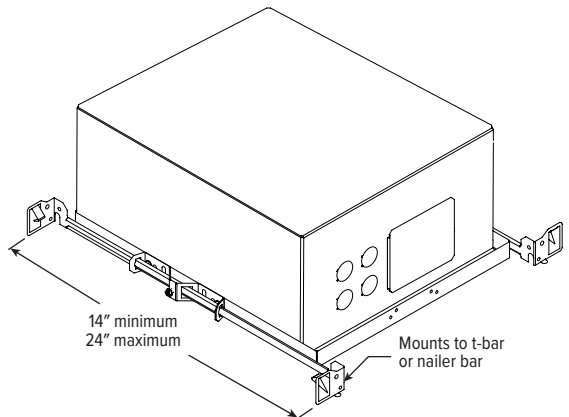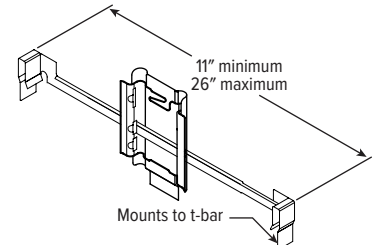

F1 with I Mounting Type



4DS PoE | tunable WHITE 4.5" Downlight – Square

NODE CONNECTION DETAILS

Includes 24" cable with 4-position mating connector for Platformatics POE-LN2 node. See node spec sheet for details: platformatics.com/product/poe-ln2

