

6PS tunable WHITE 6" Shallow Plenum Downlight – Square


FIXTURE PERFORMANCE DATA

	DISTRIBUTION	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
L12	W	1267	14.6	87.0
	M	1203	14.6	82.7
	N	1154	14.6	79.3
L20	W	2205	24.0	91.9
	M	2098	24.0	87.4
	N	2018	24.0	84.1
L42	W	4466	46.7	95.6
	M	-	-	-
	N	-	-	-

MULTIPLIER TABLES

COLOR TEMPERATURE		
CCT	LUMENS	WATTS
2700K	0.83	1.03
3000K	1.00	1.00
3500K	0.99	0.99
4000K	1.00	1.00
5000K	0.98	1.03


TRIM	
CATALOG NUMBER	CONVERSION FACTOR
AD	0.85
PD	0.85



- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Wattage shown is based on 120V input.
- Results based on 4000K, 80 CRI, actual lumens may vary +/-5%
- Use multiplier tables to calculate additional options

PHOTOMETRY


6PS-L20/8TW-DIM-UNV-LW-OF-WH Total Luminaire Output: 2205 lumens; 24.0 Watts | Efficacy: 91.9 lm/W | 80.0 CRI; 4000K CCT

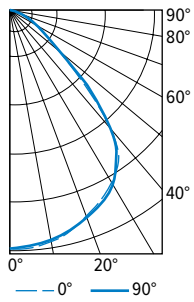

CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
		0°	45°	90°	
	0	1091	1091	1091	
	5	1091	1085	1082	103
	15	1052	1044	1047	295
	25	978	968	976	449
	35	868	867	847	533
	45	518	654	513	440
	55	196	307	188	223
	65	94	114	94	104
	75	41	44	42	47
	85	8	7	8	10
	90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	848	38
	0 - 40	1380	63
	0 - 60	2043	93
	0 - 90	2205	100
	0 - 180	2205	100


6PS-L20/8TW-DIM-UNV-LM-OF-WH Total Luminaire Output: 2098 lumens; 24.0 Watts | Efficacy: 87.4 lm/W | 80.0 CRI; 4000K CCT

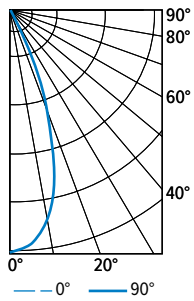

CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
		0°	45°	90°	
	0	4312	4312	4312	
	5	4225	4197	4169	387
	15	2964	2989	3007	803
	25	967	1014	1011	495
	35	289	305	306	203
	45	121	130	129	102
	55	61	68	61	59
	65	30	33	30	31
	75	12	13	12	14
	85	1	2	1	3
	90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1686	80
	0 - 40	1889	90
	0 - 60	2050	98
	0 - 90	2098	100
	0 - 180	2098	100

6PS-L20/8TW-DIM-UNV-LN-OF-WH Total Luminaire Output: 2018 lumens; 24.0 Watts | Efficacy: 84.1 lm/W | 80.0 CRI; 4000K CCT

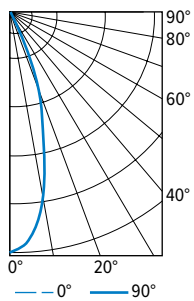


CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
		0°	45°	90°	
	0	4898	4898	4898	
	5	4658	4622	4619	418
	15	2723	2748	2731	749
	25	849	907	892	436
	35	252	266	271	180
	45	120	130	129	100
	55	74	85	77	72
	65	41	46	42	44
	75	15	17	15	18
	85	1	1	1	3
	90	0	0	0	


LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1603	79
	0 - 40	1783	88
	0 - 60	1954	97
	0 - 90	2018	100
	0 - 180	2018	100

FLANGE TYPE DETAILS


1/2" STANDARD



1/4" MUD-IN



MUD FLANGE MOUNTING KIT (SLIM FLANGE TYPE)

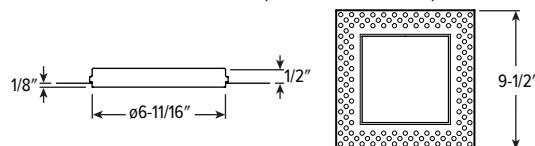

6PS tunable WHITE

6" Shallow Plenum Downlight – Square

CONTROL DETAILS

DIM



DALI



DMX




LUTRON T-SERIES




REFLECTOR FINISH DETAILS

CS Clear semi-specular **WH** White **BL** Black




MOUNTING TYPE DETAILS

NEW CONSTRUCTION

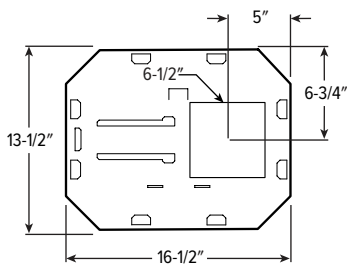


IC-RATED

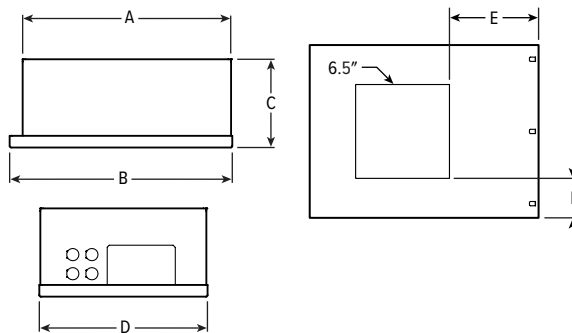


LUMENS	LENGTH					
	A	B	C	D	E	F
L12	15-3/16"	16"	4-1/2"	12-1/8"	6-1/4"	2-13/16"
L20			6-3/8"			

REMODEL

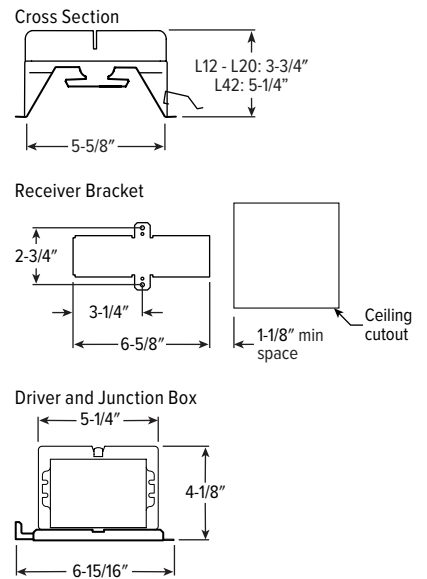


6PS tunable WHITE 6" Shallow Plenum Downlight – Square

EM/10W/RTS DETAILS





Shown Installed

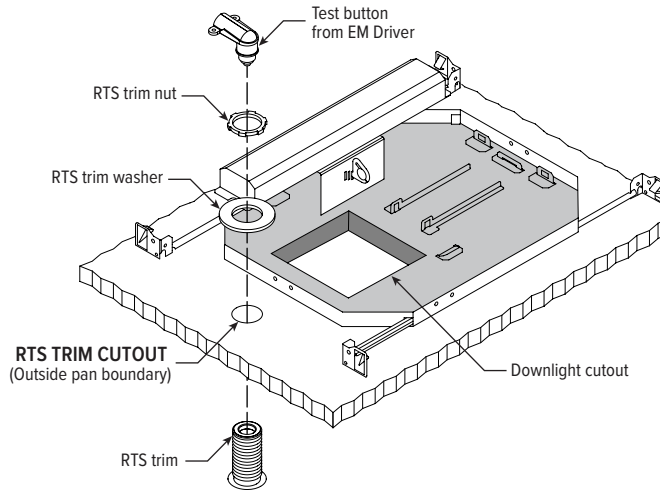


MOUNTING HARDWARE DETAILS

F1 Integral 2-position fixed pan bracket, universal bar hanger included

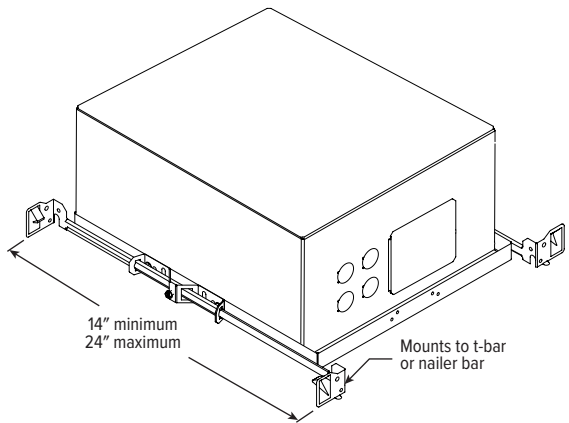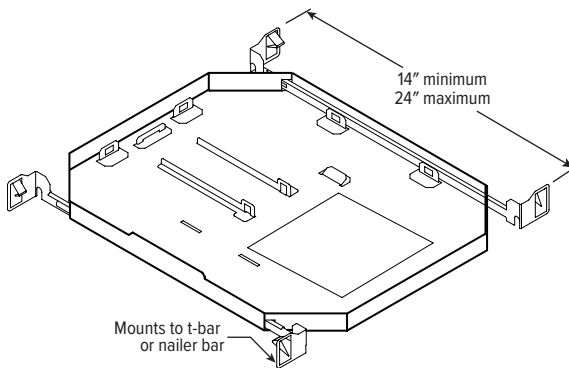


F1 with I Mounting Type


BA1 Adjustable butterfly pan bracket, bar hanger not included (N Mounting Type only)



BA2 Adjustable butterfly pan bracket, heavy-duty universal bar hanger included (N Mounting Type only)

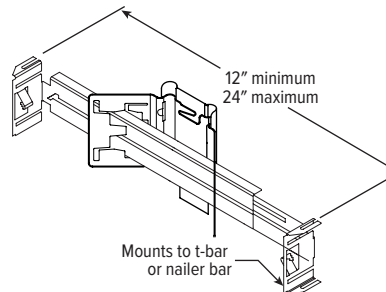

CA1 Adjustable caterpillar pan bracket, universal bar hanger included (N Mounting Type only)

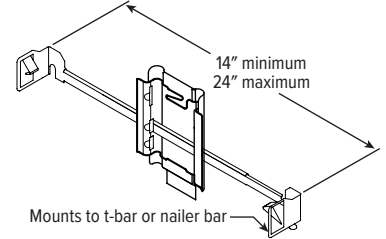

CA2 Adjustable caterpillar pan bracket, t-bar hanger included (N Mounting Type only)

