

CATALOG #: _____

TYPE: _____

PROJECT: _____



FEATURES

- Small fixture profile allows inconspicuous placement in coves or confined spaces
- Choice of diffuse and prismatic lenses
- Flat lens provides even illumination and minimizes glare
- Row applications produce continuous light with minimal interruption between fixtures
- Wide range of light levels to meet application requirements
- Variety of surface and suspended mounting accessories
- Optional wireguard provides added protection
- High-performance up to 154 lm/W
- Wireless in-fixture control solutions available
- Made Right Here® in the USA

SPECIFICATIONS

- HOUSING** – 22-gauge die-formed C.R.S.
- FINISH** – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- SHIELDING** – Diffuse matte acrylic, .080" thick.
- ELECTRICAL** – High-quality mid-power LED board. L80 > 72,000 hours per IES TM-21. 25°C maximum ambient operating temperature. 50/60 Hz constant current driver.
- MOUNTING** – Surface (ceiling or wall) or suspended.
- LISTINGS** –
 - cETLus conforms to UL STD 1598. Certified to CAN/CSA STD C22.2 No. 250.0. Suitable for damp locations.
 - UL 924 available, see Options.
 - Build America, Buy America (BABA) and Buy American Act (BAA) compliant. Request certification at hew.com/buy-american
- WARRANTY** – 5-year limited warranty, see hew.com/warranty

ORDERING EXAMPLE: 75L - 4 - L65/835 - DMA - OPTIONS - CONTROL/DIM - UNV

SERIES	LENGTH	LUMENS ^[1]			CRI	CCT	SHIELDING
75L	2 22-1/2"	2'	4'	8'	8 80	27 2700K	DMA Diffuse matte acrylic, .080" thick AF12125 Frosted acrylic, pattern #12, .125" thick
	4 44-5/8"	L10 1,000lm	L20 2,000lm	L40 4,000lm	9 90	30 3000K	
	8 89-1/4" ^[2]	L15 1,500lm	L38 3,800lm	L76 7,600lm		35 3500K	
		L20 2,000lm	L50 5,000lm	L100 10,000lm		40 4000K	
		L32 3,200lm	L65 6,500lm	L130 13,000lm		50 5000K	
		L40 4,000lm	L80 8,000lm	L160 16,000lm			

OPTIONS ^[3]

See page 3 for FINISH OPTIONS.

EM/10WLP	Low-profile 10-watt emergency battery ^[4]
EM/10WRM	Remote mount 10-watt emergency battery
EM/10WRM/RTS	Remote mount 10-watt emergency battery with regressed test switch
(L___)	Additional lower lumen packages available ^[5] Example: 5,500 nominal lumens = 75L-4-L65/835-(L55)
WG-75	11-gauge white powder coat wireguard ^[6]
315	1-1/2" ceiling spacer
VBV	(2) Y-hangers
VBV-2	(2) Y-hangers with 2' chains
RA-75	Row aligner ^[7]
45AMB	(2) 45° adjustable mounting brackets ^[8]

QC__ Quick-connect wiring harness ^[9]

GEN Approved for UL 924 emergency generator circuit through-feed wiring ^[10]

SP1 10kV surge protection, 120 or 277V

SP2 10kV surge protection, 208 or 240V

SP3 10kV surge protection, 347V

AIRCRAFT CABLES (EXAMPLE: ACF/D48) ^[11]

Prefix	Type	Length
ACF/ Feeder	D 1" grid & hardpan	24 24"
ACJ/ Joiner	N 9/16" grid	48 48"
	S Slot grid	96 96"

CONTROL ^[12]

See page 5 for ADDITIONAL CONTROL OPTIONS.

–	None
AVI-LVFA	Avi-on wireless fixture control ^[13]
AVI-LVFA-PIR	Avi-on wireless fixture control with high bay PIR motion and daylight sensor, bottom mount ^[14]
AVI-LVFA-CS2-PIR	Avi-on wireless fixture control with PIR motion and daylight sensor, bottom mount ^[15]
AWNRR	Lutron Athena wireless node integral fixture control, RF only ^[16]
AWNS	Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing ^[17]

DRIVER

See page 6 for ADDITIONAL DRIVER OPTIONS.

DRIVER	VOLTAGE
DIM Driver with external 0-10V dimming wires	120 120V 208 208V 240 240V
DRV Driver without external dimming wires	UNV 120-277V 347 347V ^[20]
DA Driver with 12V auxiliary power, without external dimming wires ^[18]	
DSR Sensor-ready driver without external dimming wires (D4i DALI-2) ^[19]	

NOTES

- Lumen output based on DMA shielding, 80 CRI/3500K CCT. Actual performance may vary +/-5%, see page 2 for FIXTURE PERFORMANCE DATA. Additional lumen packages available, see options.
- Ships with (2) 4' lenses.
- Remote EM batteries: max remote distance 50', including suspension length. Large remote box provided. Specify CEC in the option code when California Energy Commission regulations are required. See page 3 for REMOTE MOUNT BATTERY DETAILS.
- Not available with 2' fixtures, 4' L80 or 8' L160 lumen packages.
- Specify in increments of 100 nominal lumens. Option must be specified with next higher lumen package.
- Shipped separately, field-installed.
- Required when row mounting with aircraft cables.
- Cord recommended, ships separately. Field-adjustable up and down in 7-1/2" increments. Field-adjustable up and down in 7-1/2" increments.
- See page 2 for QUICK-CONNECT OPTIONS.
- Maximum mounting height is 15.4' (4.7 m). Minimum lumen output is 400 lm/ft. See hew.com/UL924 for details.
- Units specified with aircraft cable require cord. Requires RA-75 row aligner. See page 3 for MOUNTING DETAILS.
- See page 3 for SENSOR PLACEMENT DETAILS. See page 4 for AVI-ON BLUETOOTH WIRELESS CONTROL DETAILS.
- DA Driver only.
- DA Driver only
- DA driver only.
- DA and DSR Drivers only.
- DA and DSR Drivers only.
- Avi-on, Lutron Athena, and LV-ZLS05 Controls only.
- Lutron Athena Controls only.
- Not available with EM batteries, DA, or DSR drivers.



FIXTURE PERFORMANCE DATA

	LED PACKAGE	WATTAGE	DMA LENS		AF12125 LENS	
			DELIVERED LUMENS	EFFICACY (lm/W)	DELIVERED LUMENS	EFFICACY (lm/W)
2'	L10	8.3	1023	123	1177	142
	L15	12.5	1514	121	1743	139
	L20	17.0	2024	119	2329	137
	L32	27.8	3209	116	3694	133
	L40	33.8	4014	119	4619	137
4'	L20	16.2	2045	126	2354	145
	L38	31.2	3936	126	4529	145
	L50	42.2	5131	122	5903	140
	L65	55.7	6547	118	7534	135
	L80	66.9	8080	121	9298	139
8'	L40	29.7	3975	134	4574	154
	L76	60.3	7677	127	8834	147
	L100	81.5	10129	124	11656	143
	L130	111.4	13093	118	15067	135
	L160	133.8	16161	121	18597	139


MULTIPLIER TABLE

	COLOR TEMPERATURE	
	CCT	CONVERSION FACTOR
80 CRI	2700K	0.97
	3000K	0.99
	3500K	1.00
	4000K	1.03
	5000K	1.06
90 CRI	2700K	0.80
	3000K	0.82
	3500K	0.83
	4000K	0.86
	5000K	0.89

- Photometrics tested in accordance with IESNA LM-79. Results based on 80 CRI/3500K CCT, average wattage for 120V through 277V input, and 25°C ambient temperature. Actual performance may vary +/-5%.
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.
- Use multiplier table to calculate additional options.

PHOTOMETRY

75L-4-L65/835-DMA Total Luminaire Output: 6547 lumens; 55.7 Watts | Efficacy: 118 lm/W | 80 CRI; 3500K CCT




VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0	2916	2916	2916	
5	2975	2900	2850	275
15	2830	2751	2677	776
25	2560	2448	2326	1127
35	2183	2014	1846	1263
45	1713	1505	1307	1174
55	1198	1019	864	929
65	743	605	506	619
75	358	282	237	308
85	82	59	56	75
90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	2178	33
	0 - 40	3441	53
	0 - 60	5544	85
	0 - 90	6547	100
	0 - 180	6547	100

FIXTURE DETAILS

See hew.com/power-entry for power entry details.

BACKVIEW

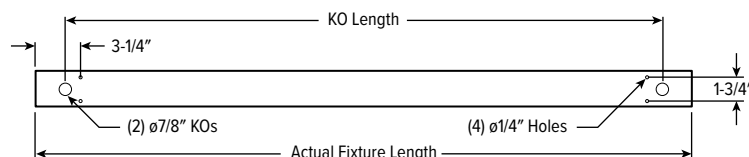

	7/8" KOs (G)	ACTUAL FIXTURE LENGTH (H)
2'	18-3/8"	22-1/2"
4'	40-1/2"	44-5/8"
8'	85-1/8"	89-1/4"

QUICK-CONNECT OPTIONS


Note: Quick-connect wiring required for row mounting. All QC harnesses contain (5) 16ga conductors plus ground.

DESIGNATION	NUMBER OF 16GA WIRES FACTORY CONNECTED (EXCLUDING GROUND)	WIRE COLOR/POWER SUPPLY FACTORY CONNECTIONS	TYPICAL USE
QCBW	2	Black, White	On/off switching (DRV) or line voltage dimming (DIM LINE)
QCRW	2	Red, White	Alternating circuits on/off switching (DRV) or line voltage dimming (DIM LINE)
QCBRW	3	Black, Red, White	On/off switching (DRV) or line voltage dimming when equipped with EM battery packs
QCBW/PK	4	Black, White, Purple, Pink	Single circuit with 0-10V low voltage dimming (DIM)
QCRW/PK	4	Red, White, Purple, Pink	Alternating circuits on/off switching with 0-10V low voltage dimming (DIM)
QCBRW/PK	5	Black, Red, White, Purple, Pink	On/off switching when equipped with EM battery packs and 0-10V dimming (DIM)
QCBW/RPK	5	Black, White, Red, Purple, Pink	On/off switching with 0-10v dimming and 0-10v tunable using shared common
QCUU	N/A	N/A	QC harness passes through fixture, but is not connected to it



75L LED Flat Lens Strip


MOUNTING DETAILS

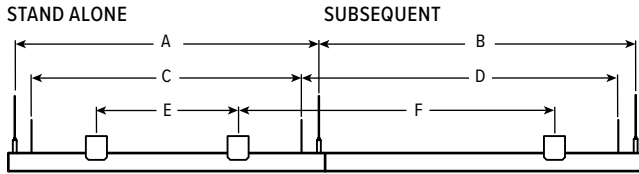

MOUNTING LENGTH

	AIRCRAFT CABLE		VBY HANGER		315 SPACER	
	A	B	C	D	E	F
2'	21-1/2"	22-1/2"	19"	22-1/2"	10"	22-1/2"
4'	43-5/8"	44-5/8"	41-1/4"	44-5/8"	32"	44-5/8"
8'	88-3/16"	89-1/4"	85"	89-1/4"	77"	89-1/4"

STANDARD HARDWARE FOR SUSPENDED PRODUCT (Grid and Hardpan)



Notes:

- Fixtures are provided with adjustable length aircraft cables and mounting hardware, must specify.
- Electrical supply is brought into the feeder fixture, either as part of a row or as a stand-alone unit. Joiner fixtures complete the row.
- The feeder kits are standard with a 5" canopy to cover the junction box and a 2" canopy at the non-feed points. No J-box is required at non-feed points.


CORD FOR SUSPENDED PRODUCT

Units specified with aircraft cable require cord. Please specify cord type using ordering information below. Long fixture rows may require multiple feed points based on 18ga conductor size.


EXAMPLE: S2438D/W				
CORD TYPE	LENGTH	# OF COND. ⁽¹⁾	WIRE SIZE	COLOR
S	24 24"	3	8D 18ga	/W White /B Black
	48 48"	4		
	96 96"	5		

¹ Includes (2) 22ga purple & pink dimming conductors


WG-75




VBY




315



RA-75




45AMB

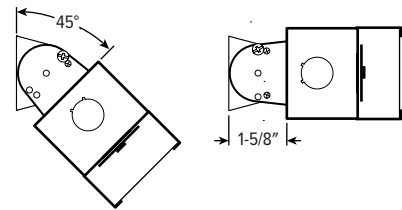

REMOTE MOUNT BATTERY DETAILS

EM/10WRM/RTS





Regressed test switch
ø1-3/4"

EM/10WRM



Standard test switch
2-3/4" x 4-1/2"

Max remote distance is 50' including suspension length, connection by others.

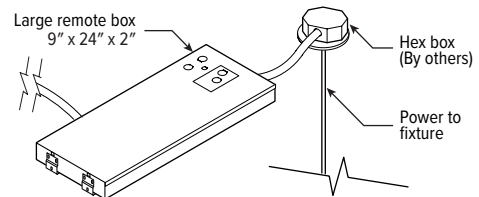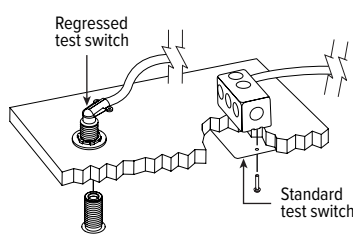

FINISH OPTIONS


WHITE




BLACK




BRONZE




NICKEL



SILVER




ALUM




For custom color, please specify RAL code or a manufacturer code with description. All custom colors other than RAL require two sample swatches, minimum 1" square.

SENSOR PLACEMENT DETAILS

AVI-LVFA | AWNR | AWNS | WS-FSP | LV-ZLSO5

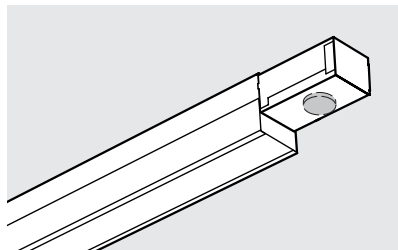

LV-OSFHU | LSXR

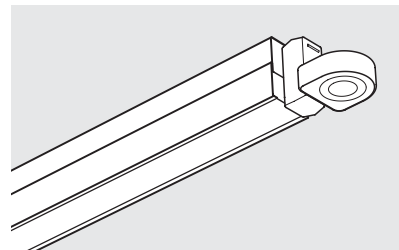

H.E. Williams, Inc.

Carthage, Missouri

www.hew.com

417-358-4065

Designed and Manufactured in the USA

REV.03/26/25.MH

Strips

Page 3 of 6

75L LED Flat Lens Strip

AVI-ON BLUETOOTH WIRELESS CONTROL DETAILS

FEATURES

Simple

- Gateway-free distributed control
- Contractor friendly installation
- Occupancy/vacancy/daylight sensing

Scalable

- Virtually unlimited network size
- Spans small areas to large garages
- Flexible control strategies

Secure

- Optional cloud connectivity
- UL IoT platinum security rating
- DLC 5.0 compliant

COMMISSIONING & INSTALLATION TOOLS

Avi-on mobile apps provide intuitive, quick installation and commissioning. Pro tools are available to qualified installers. Live commissioning training and on-site or remote support by Avi-on must be ordered separately through Avi-on.



Commissioning Mobile App



Zone Scanner Web App



Commissioning Pro App

SYSTEM COMPONENTS



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Avi-on is under license. Other trademarks and trade names are those of their respective owners.


ACCESSORIES

WALL STATIONS	
AVI-B-2401AC-1	Scene controller - buttons numbered 1-4 and up/down/off, 120-277VAC
AVI-B-2402BAT-1	Scene controller - buttons numbered 1-4 and up/down/off, battery powered
AVI-B-2401AC-2	Dimmer with presets - buttons with percentages and up/down/off, 120-277VAC
AVI-B-2402BAT-2	Dimmer with presets - buttons with percentages and up/down/off, battery powered
AVI-B-2401AC-3	Two button control on/off or hold to dim up/down, 120-277VAC
AVI-B-2402BAT-3	Two button control on/off or hold to dim up/down, battery powered


NETWORK	
AVI-RAB-LTE	Remote access bridge
AVI-NTM	Network time manager with battery backup
CEILING MOUNT SENSORS	
AVI-KIT-SEN-DUCM	PIR motion and ultrasonic sensor kit
AVI-KIT-SEN-ICM	PIR motion and photocell sensor kit

For load controllers and additional accessory info, see hew.com/avi-on

AVI-LVFA-PIR Avi-on wireless fixture control with high bay PIR motion and daylight sensor, bottom mount. DA Driver only.

SPECIFICATIONS	
TYPE	PIR Motion + Daylight
MOUNTING HEIGHT	8' – 45'
LENS	Single lens detects high and low bay motion.
DETECTION ANGLE	360°
TEMPERATURE RANGE	-30° to 70°C
RELATIVE HUMIDITY	90 to 95% at 30°C
COMMISSIONING	App (iOS or Android)
SYSTEM REQUIREMENTS	Avi-On wireless fixture controls plus desktop and mobile apps
MANUFACTURER	Avi-On
	

SENSOR COVERAGE PATTERNS

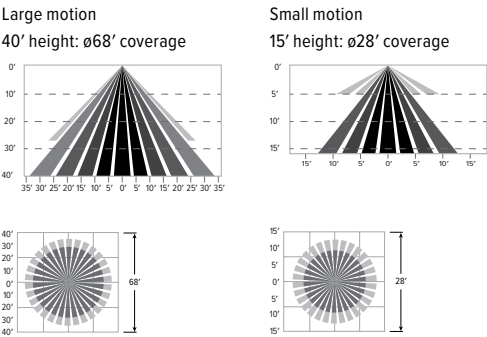

SENSOR DETAIL




Dimensions: 2-5/16" x 1-7/16"



75L LED Flat Lens Strip



AVI-LVFA-CS2-PIR Avi-on wireless fixture control with PIR motion and daylight sensor. DA Driver only.

SPECIFICATIONS	
TYPE	PIR Motion + Daylight
MOUNTING HEIGHT	8' – 10'
DETECTION ANGLE	360°
TEMPERATURE RANGE	-30° to 50°C
RELATIVE HUMIDITY	10 to 80% non-condensing
IP RATING	IP20
MANUFACTURER	Avi-On
	

SENSOR COVERAGE PATTERNS

Side View

8' height: ø24' coverage




SENSOR DETAIL



Dimensions: 13/16" x 2-1/4"


ADDITIONAL CONTROL OPTIONS

AWNS Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing. DA and DSR Drivers only.

SPECIFICATIONS	
TYPE	Radio Frequency
MOUNTING HEIGHT	8' – 12'
DETECTION ANGLE	360°
TEMPERATURE RANGE	0° to 55°C
RELATIVE HUMIDITY	0 to 90%, non-condensing
COMMISSIONING	Clear Connect gateway – Type X with app (iOS or Android)
MANUFACTURER	Lutron
	

SENSOR COVERAGE PATTERNS

9' height: ø12' coverage



Motion Sensor Coverage

CEILING HEIGHT	COVERAGE AREA (SQ FT)
8'	114
9'	144
10'	178
12'	256

SENSOR DETAIL



Dimensions: ø1-1/8"

ATHENA CONTROL OPTIONS

CATALOG NUMBER	DESCRIPTION
AWNDR	Lutron Athena wireless node integral fixture control, RF only, for use with D4i DALI-2 or driver with 12V auxiliary power.
AWNS	Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing, for use with D4i DALI-2 or driver with 12V auxiliary power.
AWNDR-BL	Lutron Athena wireless node integral fixture control, RF only, for use with D4i DALI-2 or driver with 12V auxiliary power, black finish.
AWNS-BL	Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing, for use with D4i DALI-2 or driver with 12V auxiliary power, black finish.

OCCWS-FSP-311-L_-120/277 Wattstopper PIR motion and daylight sensor, 120/277. Must specify lens: L2, L3, or L7. Factory installed.



OCCWS-FSP-211-L_-120/277 Wattstopper PIR motion and daylight sensor, 120/277. Must specify lens: L2, L3, or L7. Factory installed.

FSIR-100 Remote controller for 211 sensor. Please specify quantity required per project. Ordered and shipped separately.



SPECIFICATIONS	
TYPE	PIR Motion + Daylight
MOUNTING HEIGHT	8' – 40'
DETECTION ANGLE	360°
TEMPERATURE RANGE	-40° to 75°C
COMMISSIONING	311 Sensor: App (iOS or Android) 211 Sensor: FSIR-100 Remote

SENSOR COVERAGE PATTERNS



L2 8' height: ø48' coverage



L3 20' height: ø40' coverage



L7 40' height: ø100' coverage



SENSOR DETAIL



Dimensions
L2/L3: ø2-3/8" | L7: ø3-1/4"




75L LED Flat Lens Strip

LV-ZLS05-ILW Leviton PIR motion and daylight sensor. DA Driver only. Adjustable via remote. Optional ZLSOR-RA1 remote controller available.
ZLSOR-RA1 Remote controller for ZLS05 sensor. Please specify quantity required per project. Ordered and shipped separately.

SPECIFICATIONS	
TYPE	PIR Motion + Daylight
MOUNTING HEIGHT	8' – 10'
DETECTION ANGLE	120°
TEMPERATURE RANGE	-20° to 70°C
COMMISSIONING	DIP switches or optional remote: ZLSOR-RA1

SENSOR COVERAGE PATTERNS

10' height: ø24' coverage



SENSOR DETAIL




Dimensions: ø1-5/16"

OCCLV-OSFHU-ITW-120-347 Leviton PIR motion sensor, 120-347V.

SPECIFICATIONS	
TYPE	PIR Motion
MOUNTING HEIGHT	8' – 40'
LENS	Interchangeable high bay, low bay or aisle mask
DETECTION ANGLE	360°
TEMPERATURE RANGE	-10° to 71°C
RELATIVE HUMIDITY	20% to 90% non-condensing

SENSOR COVERAGE PATTERNS

High bay
40' height: ø60' coverage

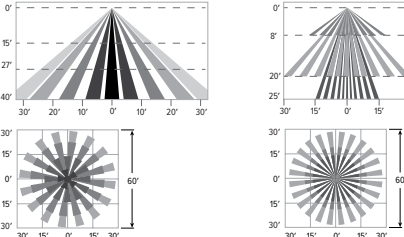

SENSOR DETAIL




OCCSS LSXR-10-120-277 Sensor Switch PIR motion sensor, 120-277V

OCCSS LSXR-10-347/480 Sensor Switch PIR motion sensor, 347/480V

SPECIFICATIONS	
TYPE	PIR Motion
MOUNTING HEIGHT	7' – 15'
DETECTION ANGLE	360°
TEMPERATURE RANGE	-10° to 60°C
RELATIVE HUMIDITY	Up to 90% non-condensing

SENSOR COVERAGE PATTERNS

9' height: ø56' coverage



SENSOR DETAIL



ADDITIONAL DRIVER OPTIONS

Note: Lumen restrictions apply, consult product builder at hew.com/product-builder

CATALOG NUMBER	DESCRIPTION
DRV	Driver without external dimming wires prewired for non-dimming applications
DIM	Driver with external dimming wires prewired for 0-10V low voltage applications
DIM1	1% driver with external dimming wires prewired for 0-10V low voltage applications
DIM LINE	Line voltage dimming driver (TRIAC and ELV compatible, 120V only)
DIM TRC	Line voltage dimming driver (TRIAC compatible, 120V only)
DA	Driver with 12V auxiliary power, without external dimming wires
DSR	Sensor-ready driver without external dimming wires (D4i DALI-2)
SD40	40% step-dimming driver
SD50	50% step-dimming driver
DALI	DALI dimming driver
LDE1	Lutron Hi-lume 1% EcoSystem dimming driver

