


Shown with lamps, not included



CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- TLED fixtures provide on-site lamping flexibility and simple installation
- Hinging/locking lamp brackets and factory-mounted, prewired sockets reduce installation time
- Channel connector furnished for continuous row applications (included with 8' units only)
- Quarter-turn fastener secures wireway cover to housing
- Special reflectors are available for precise light distribution
- Made Right Here® in the USA



SPECIFICATIONS

- HOUSING** – 22-gauge die-formed C.R.S.
- FINISH** – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL** – Prewired for Type B, single or double end, non-shunted LED tubes, lamps by others.
- MOUNTING** – Surface (ceiling or wall) or suspended (hanging hardware required).
- LISTINGS** –
 - UL/CUL listed as LED surface luminaire suitable for dry or damp locations.
 - Complies with the Buy American Act and other federal regulations. Request certification at hew.com/baa.
- WARRANTY** – 5-year limited fixture warranty, see hew.com/warranty.

ORDERING EXAMPLE: 76 - 4 - 24T8LS/B - OPTIONS - UNV

ORDERING INFO

SERIES	LENGTH ^[1]	TOTAL LAMPS	LAMP SIZE	WIRING	LAMP TYPE
76	4 4'	4' Fixtures	4T5L 4' T5 LED tube	S Single end ^[3]	B Type B
	8 8'	1, 2, or 3 8' Fixtures	4T8L 4' T8 LED tube	D Double end	
		2, 4, or 6 ^[2]			

OPTIONS ^[4]

WG-7611	11-gauge white powder coat wireguard
WG-7614	14-gauge white powder coat wireguard
VBV	(2) Y-hangers
VBV-2	(2) Y-hangers and (2) 2' chains
GC2/Y18/_	Cable suspension system ^[5]
GC2/L/10	10' cable suspension system with loop ^[6]
320	1-1/2" ceiling spacer
SHS	Surface mount hanger for NEMA-G T-bar system
GAT	T-bar fastener for 320 ceiling spacer
SS-12	Single stem and canopy, 12" ^[7]
SWS-12	Swivel stem and canopy, 12" ^[8]

VOLTAGE

UNV 120-277V


NOTES

- For actual length, see page 2 for FIXTURE DETAILS.
- 1, 2, or 3-lamp cross-section.
- Due to differences in wiring of TLED lamps, samples of specified lamp must be provided at time of fixture order.
- Not available with EM battery options. See page 2 for SPECIAL REFLECTOR OPTIONS. See page 2 for FINISH OPTIONS. Custom colors available upon request. See Technical Info for [Power Entry](#) details. See page 2 for MOUNTING OPTIONS.


- 1 pair. Must specify length: 5', 10', 15', or 20'
- Requires VBV hanger.
- Two stem sets required. One additional stem set required for each row mounted fixture.
- Two stem sets required. One additional stem set required for each row mounted fixture.




FIXTURE DETAILS

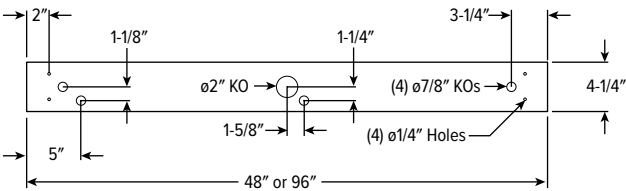

MOUNTING OPTIONS

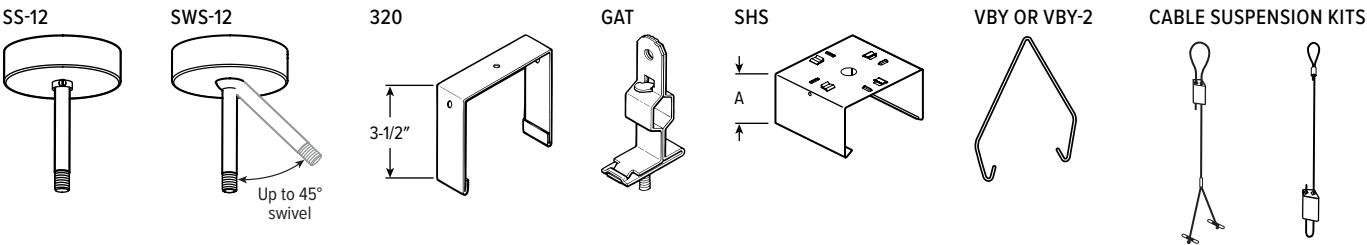


SPECIAL REFLECTOR OPTIONS

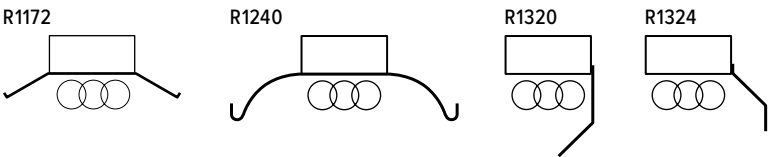

- Reflectors are ordered separately. Example: R1172-4-76 REFL. For additional styles, see [Technical Info](#).
- Clear polycarbonate reflector aligners for continuous row applications (8' unit only) are ordered with reflectors.
- Note: Drawings represent reflector style. Actual cross-section will vary depending on lamp configuration.

FINISH OPTIONS

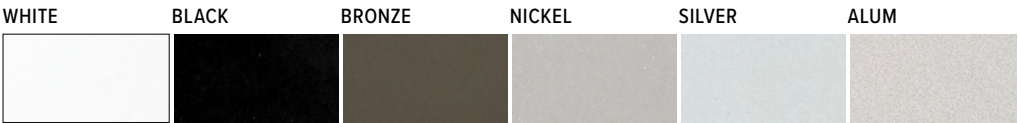

For custom color, please specify RAL code or a manufacturer code with description. All custom colors other than RAL require two sample swatches, minimum 1" square.

