

CATALOG #: \_\_\_\_\_

TYPE: \_\_\_\_\_

PROJECT: \_\_\_\_\_

**FEATURES**

- Tunable white from 3000K to 5000K CCT, minimum 80 CRI
- Backlit curved lens provides uniform illumination for visual comfort
- Curved floating center detail creates a highly-aesthetic presence
- Maximize energy savings with efficacies as high as 107 lm/w
- Hinged door frame with optical assembly swings down to allow easy access from room side of fixture
- Optional gasketed acrylic lens helps protect against contaminants
- Made Right Here® in the USA

**SPECIFICATIONS**

- **HOUSING** – Precision die-formed 22-gauge C.R.S.
- **DOOR FRAME** – Hinged, flat, extruded aluminum door frame with optical assembly.
- **SHIELDING** – Diffuse polycarbonate lens and acrylic center standard.
- **FINISH** – 95% reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- **ELECTRICAL** – High quality mid-power LED boards. L70 >50,000 hours per IES TM-21. Tunable White products use LEDs of multiple shade of white from single-CCT products at the same CCT. All CCTs are within 3 MacAdam ellipses.
- **MOUNTING** – Designed for NEMA Type “G” 1” grid ceiling standard. For NEMA Type “NFG” and “SG” 9/16” grid installations, specify EQCLIPS option. NEMA Type “F” available, see options.
- **LISTINGS** –
  - cETLus conforms to UL STD 1598 and UL STD 8750.
  - Certified to CAN/CSA STD C22.2 No. 250.0.
  - Suitable for damp locations.
  - IC-rated for direct contact with insulation.
  - City of Chicago Environmental Air approved when specified with CP option.
- **WARRANTY** – 5-year limited warranty, see [hew.com/warranty](http://hew.com/warranty).

**ORDERING EXAMPLE: AT1 - 2 4 - L69/8TW - D - OPTIONS - DALI - UNV**

**ORDERING INFO**

SERIES	WIDTH	LENGTH	LUMENS <sup>[1]</sup>	COLOR	SHIELDING
AT1	1 1'	2 2' <sup>[2]</sup>	1x4	8TW Tunable white (80 CRI, 3000K-5000K)	D Diffuse matte acrylic center P Perforated center <sup>[3]</sup>
		2 2'	L20 2,000lm		
		4 4'	L40 4,000lm		
	2x2	2 2'	L54 5,400lm		
			L20 2,000lm		
			L35 3,500lm		
	2x4	2 2'	L50 5,000lm		
			L35 3,500lm		
			L50 5,000lm		
	2x4	2 2'	L69 6,900lm		
			L35 3,500lm		
			L50 5,000lm		

**OPTIONS**

<b>EM/7W</b>	7-watt emergency LED battery
<b>EM/10W</b>	10-watt emergency LED battery <sup>[5]</sup>
<b>EM/10WLP</b>	Low-profile 10-watt emergency LED battery <sup>[6]</sup>
<b>EM/12W</b>	12-watt emergency LED battery <sup>[7]</sup>
<b>EQCLIPS</b>	Earthquake clips <sup>[8]</sup>
<b>(L__)</b>	Additional lower lumen packages available. <sup>[9]</sup> Example: 6,000 nominal lumens = AT1-24-L69/8TW-D-(L60)
<b>SS</b>	Sani-shield acrylic cover with double gasket. <sup>[10]</sup>
<b>SS/PC</b>	Sani-shield polycarbonate cover with double gasket. <sup>[11]</sup>
<b>AMW</b>	Anti-microbial white finish
<b>NEMA F</b>	NEMA Type “F” flange kit <sup>[12]</sup>
<b>CP</b>	Chicago Plenum (CCEA)

**CONTROL <sup>[4]</sup>**

<b>DALI</b>	Driver prewired for DALI applications
<b>DIM</b>	Dimming driver with (1) 0-10V signal to control dimming and (1) 0-10V signal to control CCT
<b>DMX</b>	Driver prewired for DMX applications
<b>PSQ</b>	Lutron T-Series 2-channel tunable white 1%.

**VOLTAGE**

<b>120</b>	120V
<b>277</b>	277V
<b>UNV</b>	120-277V

**NOTES**

- <sup>1</sup> Lumen output based on 4000 CCT. Actual lumens may vary +/-5%, see page 2 for FIXTURE PERFORMANCE DATA. Additional lumen packages available, see options.
- <sup>2</sup> 2' width only.
- <sup>3</sup> Decreases lumen output by 15%
- <sup>4</sup> See page 3 for CONTROL DETAILS.
- <sup>5</sup> 2x2, 2x4 only.
- <sup>6</sup> 1x4 only.
- <sup>7</sup> 2x2, 2x4 only.
- <sup>8</sup> 4 per fixture. Optional for 1” grid installations. Required for 9/16” grid mounting. Not available with NEMA F Option.
- <sup>9</sup> Specify in increments of 100 nominal lumens. Option must be specified with next higher lumen package.
- <sup>10</sup> Reduces lumen output by 10%.
- <sup>11</sup> Reduces lumen output by 10%.
- <sup>12</sup> Factory-installed. See page 3 for NEMA TYPE “F” INSTALLATION.




# AT1 tunable WHITE Architectural Troffer – Curved Floating Center

## FIXTURE PERFORMANCE DATA

	LED PACKAGE	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
1x4	L20	2039	21.1	96.9
	L40	4007	43.6	91.9
	L54	5440	55.4	98.2
2x2	L20	2039	21.1	96.9
	L35	3535	38.0	93.1
	L50	4972	54.7	91.0
2x4	L35	3525	32.8	107.4
	L50	5020	47.0	106.8
	L69	6961	68.4	101.8

### MULTIPLIER TABLE


CCT	CONVERSION FACTOR	
	LUMENS	WATTAGE
3000K	0.95	1.04
3500K	0.98	1.02
4000K	1.00	1.00
5000K	0.96	1.04



- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Wattage shown is average for 120V through 277V input.
- Results based on 4000K, 80 CRI, actual lumens may vary +/-5%
- Use multiplier table to calculate additional options.

## PHOTOMETRY


AT1-14-L54/8TW-D-DALI Total Luminaire Output: 5440 lumens; 55.4 Watts | Efficacy: 98 lm/W | 82 CRI; 4000K CCT



CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
		0°	45°	90°	
	0	2469	2469	2469	
	5	2488	2486	2484	234
	15	2322	2309	2301	652
	25	2020	1992	1973	922
	35	1677	1649	1626	1025
	45	1283	1259	1242	971
	55	873	871	850	784
	65	567	567	455	531
	75	274	229	205	259
	85	73	45	32	62
	90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1809	33
	0 - 40	2833	52
	0 - 60	4588	84
	0 - 90	5440	100
	0 - 180	5440	100


AT1-22-L50/8TW-D-DALI Total Luminaire Output: 4973 lumens; 54.7 Watts | Efficacy: 91 lm/W | 82 CRI; 4000K CCT



CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
		0°	45°	90°	
	0	1878	1878	1878	
	5	1880	1871	1869	178
	15	1772	1793	1823	506
	25	1563	1633	1725	755
	35	1315	1414	1548	889
	45	1014	1145	1272	885
	55	725	873	958	766
	65	461	597	680	578
	75	238	350	390	337
	85	53	65	58	79
	90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1438	29
	0 - 40	2327	47
	0 - 60	3978	80
	0 - 90	4973	100
	0 - 180	4973	100

AT1-24-L69/8TW-D-DALI Total Luminaire Output: 6961 lumens; 68.4 Watts | Efficacy: 102 lm/W | 82 CRI; 4000K CCT




CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
		0°	45°	90°	
	0	2678	2678	2678	
	5	2680	2685	2687	254
	15	2518	2561	2610	721
	25	2172	2285	2411	1057
	35	1824	2011	2181	1243
	45	1388	1623	1761	1225
	55	976	1196	1288	1045
	65	640	838	906	799
	75	334	497	511	484
	85	95	102	104	132
	90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	2032	29
	0 - 40	3275	47
	0 - 60	5545	80
	0 - 90	6961	100
	0 - 180	6961	100




# AT1 tunable WHITE Architectural Troffer – Curved Floating Center

## CROSS SECTIONS

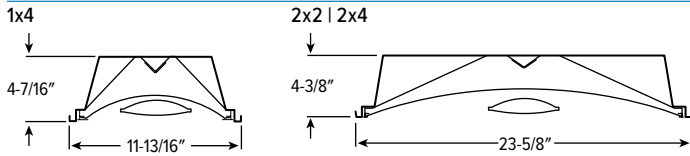


## FIXTURE DETAILS

### BACKVIEW

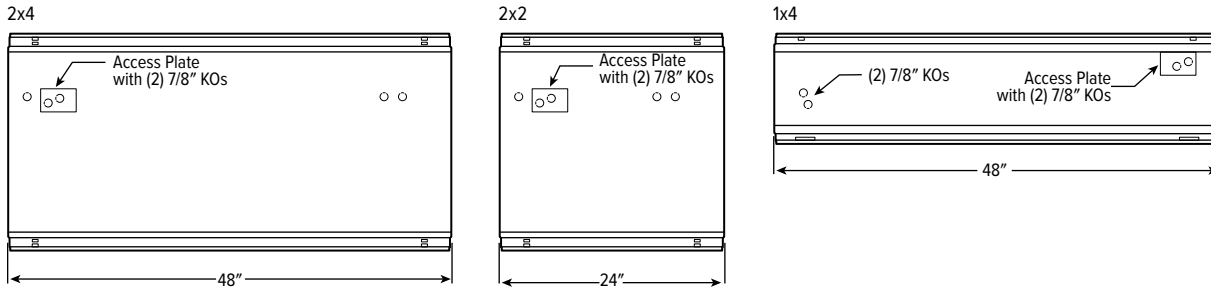


## NEMA TYPE "F" INSTALLATION

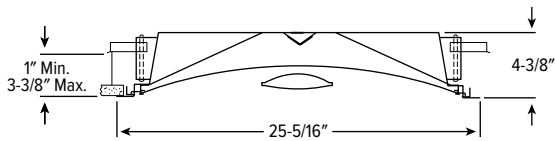

Note: Maximum recommended ceiling opening is 24-3/8" x 24-3/8" for 2'x2' and 24-3/8" x 48-3/8" for 2'x4'. For continuous row mounting, add 49-5/16" for each additional fixture to obtain ceiling opening. 1-5/16" between end plates.

## CONTROL DETAILS

### DIM



### DALI



### DMX



### LUTRON T-SERIES

