

CATALOG #: _____

TYPE: _____

PROJECT: _____



FEATURES

- Backlit curved lens provides uniform illumination for visual comfort
- Distinct curved deep center detail creates a highly aesthetic presence
- Available with decorative inserts to customize center lens
- HE option delivers superior efficacies up to 155 lm/W
- Hinged door frame with optical assembly swings down to allow easy access from room side of fixture
- Diffuse or perforated lens options enhance the space
- Optional gasketed acrylic lens helps protect against contaminants
- Anti-microbial finish option suppresses the spread of dangerous micro-organisms, mold, and bacterial growth
- Wireless in-fixture control solutions available
- Made Right Here® in the USA

SPECIFICATIONS

- HOUSING** – Precision die-formed 22-gauge C.R.S.
- DOOR FRAME** – Hinged, flat, extruded aluminum door frame with optical assembly.
- SHIELDING** – Diffuse molded acrylic lens with center detail.
- FINISH** – 95% reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL** – High-quality mid-power LED boards. L70 >60,000 hours per IES TM-21. L80 > 102,000 hours with HE option. 50/60 Hz constant current driver.
- MOUNTING** – NEMA Type “G” 15/16” or 1” grid standard. For NEMA Type “NFG” and “SG” 9/16” grid installations, specify EQCLIPS option. Drywall flange kit available, see options.
- LISTINGS** –
 - cCSAus certified as luminaire suitable for dry or damp locations.
 - IC-rated for direct contact with insulation.
 - City of Chicago Environmental Air approved when specified with CP option.
 - Build America, Buy America (BABA) and Buy American Act (BAA) compliant. Request certification at hew.com/buy-american
- WARRANTY** – 5-year limited warranty, see hew.com/warranty

ORDERING EXAMPLE: AT2 - 2 4 - L70/835 - D - OPTIONS - CONTROL/DIM - UNV

SERIES	WIDTH	LENGTH	LUMENS ⁽¹⁾	CRI	CCT	SHIELDING
AT2	2 2'	2 2'	2x2	8 80	27 2700K	D Diffuse matte acrylic center
			L30 3,000lm			
			L40 4,000lm			
			L50 5,000lm			
			2x4			
			L40 4,000lm			
			L55 5,500lm			
			L70 7,000lm			
			L100 10,000lm			
				9 90	30 3000K	P Perforated center ⁽²⁾
					35 3500K	DECORATIVE INSERTS ⁽³⁾
					40 4000K	
					50 5000K	
						D11 Triple wave
						D12 Brushed metal
						D15 Stripes
						D16 Tri-Pyramid

OPTIONS

EM/10W	10-watt emergency battery
EM/12W	12-watt emergency battery ⁽⁵⁾
EQCLIPS	Earthquake clips ⁽⁶⁾
(L___)	Additional lower lumen packages available ⁽⁷⁾ Example: 5,000 nominal lumens = AT2-24-L55/835-D-(L50).
HE	High efficacy lumen package ⁽⁸⁾
SS	Sani-shield acrylic cover with double gasket ⁽⁹⁾
SS/PC	Sani-shield polycarbonate cover with double gasket ⁽¹⁰⁾
AMW	Anti-microbial white finish
NEMA F	Flange kit, factory installed ⁽¹¹⁾
CP	Chicago Plenum (CCEA)

CONTROL ⁽⁴⁾

See page 5 for **ADDITIONAL CONTROL OPTIONS**.

–	None
AVI-LVFA	Avi-on wireless fixture control ⁽¹²⁾
AVI-LVFA-CS2-PIR	Avi-on wireless fixture control with PIR motion and daylight sensor ⁽¹³⁾
AWN	Lutron Athena wireless node integral fixture control, RF only ⁽¹⁴⁾
AWNS	Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing ⁽¹⁵⁾

DRIVER

See page 5 for **ADDITIONAL DRIVER OPTIONS**.

DIM	Driver with external 0-10V dimming wires	120 120V
DRV	Driver without external dimming wires	277 277V
DA	Driver with 12V auxiliary power, without external dimming wires ⁽¹⁶⁾	UNV 120-277V
DSR	Sensor-ready driver without external dimming wires (D4i DALI-2) ⁽¹⁷⁾	347 347V ⁽¹⁸⁾

VOLTAGE

NOTES

- Lumen output based on D Shielding, 80 CRI/3500K CCT. Actual performance may vary +/-5%, see page 2 for **FIXTURE PERFORMANCE DATA**. Additional lumen package available, see Options.
- Decreases lumen output by 15%
- Only available with D shielding option. See page 3 for **DIFFUSE CENTER DECORATIVE INSERT DETAILS**.
- See page 4 for **AVI-ON BLUETOOTH WIRELESS CONTROL DETAILS**. See page 3 for **SENSOR & NODE PLACEMENT DETAILS**.
- Not available when CEC regulations are required.
- 4 per fixture. Optional for 1” grid installations. Required for 9/16” grid mounting. Not available with NEMA F Option.
- Specify in increments of 100 nominal lumens. Option must be specified with next higher lumen package.

- Not available with 90 CRI or 2x4 L40 lumen package. See page 2 for **FIXTURE PERFORMANCE DATA**.
- Reduces lumen output by 10%. See page 2 for **FIXTURE DETAILS**.
- Reduces lumen output by 10%. See page 2 for **FIXTURE DETAILS**.
- See page 3 for **FLANGE KIT INSTALLATION**.
- DA Driver only.
- DA Driver only.
- DA and DSR Drivers only.
- DA and DSR Drivers only.
- Avi-on and Lutron Athena Controls only.
- Lutron Vive and Athena Controls only
- Not available with EM batteries, DA, or DSR drivers.



AT2^{LED} Architectural Troffer – Curved Deep Center

FIXTURE PERFORMANCE DATA

	LED PACKAGE	DELIVERED LUMENS	STANDARD		HE OPTION ⁽¹⁾	
			WATTAGE	EFFICACY (lm/W)	WATTAGE	EFFICACY (lm/W)
2x2	L30	3119	29.5	106	22.0	142
	L40	4243	37.2	114	29.5	144
	L50	5208	48.3	108	39.4	132
2x4	L40	4117	34.2	120	–	–
	L55	5633	48.0	117	36.7	154
	L70	7143	63.3	113	46.8	153
	L100	10328	86.9	119	66.7	155

¹ Not available with 90 CRI.


- Photometrics tested in accordance with IESNA LM-79. Results based on D Shielding, 80 CRI/3500K CCT, average wattage for 120V through 277V input, and 25°C ambient temperature. Actual performance may vary +/-5%.
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.
- Use multiplier table to calculate additional options.

MULTIPLIER TABLE

	COLOR TEMPERATURE	
	CCT	CONVERSION FACTOR
80 CRI	2700K	0.97
	3000K	0.99
	3500K	1.00
	4000K	1.03
	5000K	1.06
90 CRI	2700K	0.80
	3000K	0.82
	3500K	0.83
	4000K	0.86
	5000K	0.89

PHOTOMETRY


AT2-24-L40/835-D-DIM-UNV Total Luminaire Output: 4117 lumens; 34.2 Watts | Efficacy: 120 lm/W | 80 CRI; 3500K CCT



VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0	1729	1729	1729	
5	1729	1729	1731	164
15	1618	1636	1656	460
25	1398	1439	1473	663
35	1171	1225	1268	757
45	888	945	984	723
55	620	669	694	597
65	397	440	461	431
75	201	241	253	249
85	52	65	60	72
90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1287	31
	0 - 40	2044	50
	0 - 60	3364	82
	0 - 90	4117	100
	0 - 180	4117	100

AT2-24-L70/835-D-DIM-UNV Total Luminaire Output: 7143 lumens; 63.3 Watts | Efficacy: 113 lm/W | 80 CRI; 3500K CCT



VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0	3000	3000	3000	
5	3000	3000	3004	284
15	2807	2839	2873	798
25	2425	2496	2556	1151
35	2032	2126	2200	1314
45	1540	1639	1708	1254
55	1076	1161	1205	1036
65	690	763	800	749
75	349	418	439	432
85	90	113	103	126
90	0	0	0	


LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	2233	31
	0 - 40	3547	50
	0 - 60	5837	82
	0 - 90	7143	100
	0 - 180	7143	100

FIXTURE DETAILS


See hew.com/power-entry for power entry details.

BACKVIEW

2x4

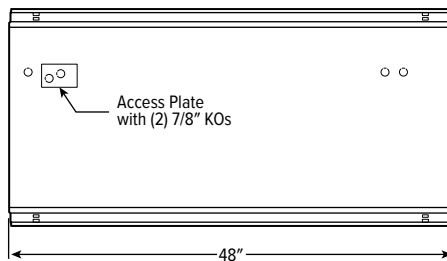


2x2



SS | SS/PC OPTIONS GASKETING DETAILS

Gasketing factory-installed between door frame and luminaire housing and between door frame and lens.



H.E. Williams, Inc.

Carthage, Missouri

www.hew.com

417-358-4065

Designed and Manufactured in the USA


Information contained herein is subject to change without notice.

REV.06/02/25.JL

Recessed
Page 2 of 5


AT2^{LED} Architectural Troffer – Curved Deep Center

FLANGE KIT INSTALLATION




Note: Maximum recommended ceiling opening is 24-3/8" x 24-3/8" for 2'x2' and 24-3/8" x 48-3/8" for 2'x4'. For continuous row mounting, add 49-5/16" for each additional fixture to obtain ceiling opening. 1-5/16" between end plates.

DIFFUSE CENTER DECORATIVE INSERT DETAILS

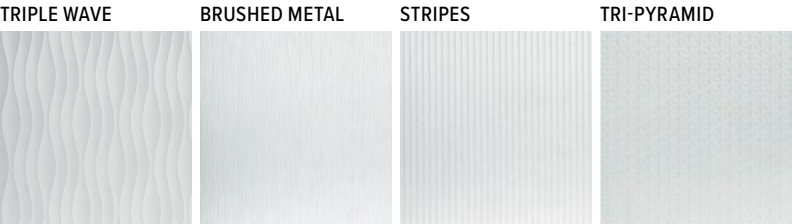

SENSOR & NODE PLACEMENT DETAILS



SEE NEXT PAGE FOR CONTROL DETAILS.



AT2^{LED} Architectural Troffer – Curved Deep Center

AVI-ON BLUETOOTH WIRELESS CONTROL DETAILS

FEATURES

Simple

- Gateway-free distributed control
- Contractor friendly installation
- Occupancy/vacancy/daylight sensing

Scalable

- Virtually unlimited network size
- Spans small offices to large warehouses
- Flexible control strategies

Secure

- Optional cloud connectivity
- UL IoT platinum security rating
- DLC 5.0 compliant

COMMISSIONING & INSTALLATION TOOLS

Avi-on mobile apps provide intuitive, quick installation and commissioning. Pro tools are available to qualified installers. Live commissioning training and on-site or remote support by Avi-on must be ordered separately through Avi-on.



Commissioning
Mobile App




Zone Scanner
Web App



Commissioning
Pro App

SYSTEM COMPONENTS

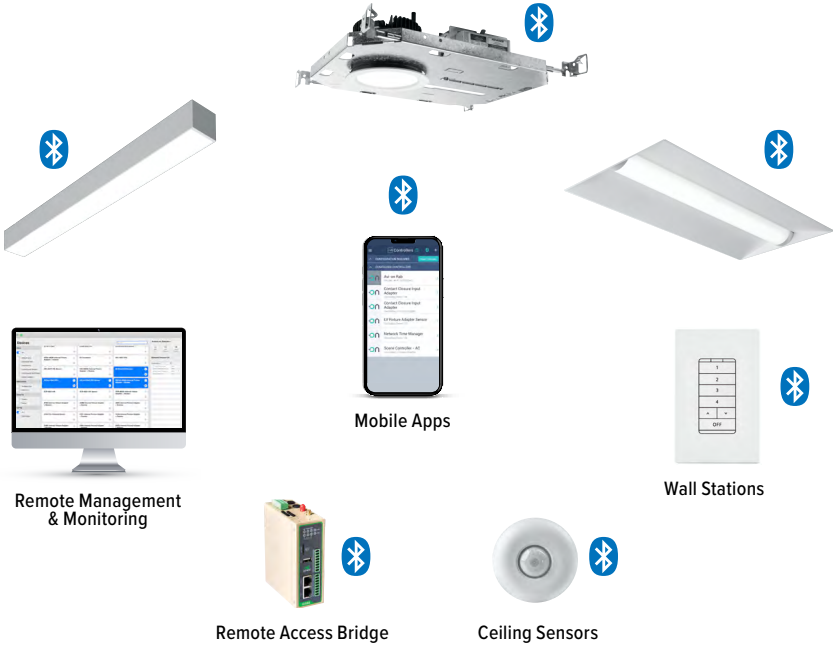

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Avi-on is under license. Other trademarks and trade names are those of their respective owners.


ACCESSORIES

WALL STATIONS	
AVI-B-2401AC-1	Scene controller - buttons numbered 1-4 and up/down/off, 120-277VAC
AVI-B-2402BAT-1	Scene controller - buttons numbered 1-4 and up/down/off, battery powered
AVI-B-2401AC-2	Dimmer with presets - buttons with percentages and up/down/off, 120-277VAC
AVI-B-2402BAT-2	Dimmer with presets - buttons with percentages and up/down/off, battery powered
AVI-B-2401AC-3	Two button control on/off or hold to dim up/down, 120-277VAC
AVI-B-2402BAT-3	Two button control on/off or hold to dim up/down, battery powered

NETWORK	
AVI-RAB-LTE	Remote access bridge
AVI-NTM	Network time manager with battery backup
CEILING MOUNT SENSORS	
AVI-KIT-SEN-DUCM	PIR motion and ultrasonic sensor kit
AVI-KIT-SEN-ICM	PIR motion and photocell sensor kit



For load controllers and additional accessory info, see hew.com/avi-on

AVI-LVFA-CS2-PIR Avi-on wireless fixture control with PIR motion and daylight sensor. DA Driver only.

SPECIFICATIONS	
TYPE	PIR Motion + Daylight
MOUNTING HEIGHT	8' – 10'
DETECTION ANGLE	360°
TEMPERATURE RANGE	-30° to 50°C
RELATIVE HUMIDITY	10 to 80% non-condensing
IP RATING	IP20
MANUFACTURER	Avi-On
	

SENSOR COVERAGE PATTERNS

Side View



SENSOR DETAIL



Dimensions: 13/16" x 2-1/4"



AT2^{LED} Architectural Troffer – Curved Deep Center

ADDITIONAL CONTROL OPTIONS


AWNS Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing. DA and DSR Drivers only.

SPECIFICATIONS	
TYPE	Radio Frequency
MOUNTING HEIGHT	8' – 12'
DETECTION ANGLE	360°
TEMPERATURE RANGE	0° to 55°C
RELATIVE HUMIDITY	0 to 90%, non-condensing
COMMISSIONING	Clear Connect gateway – Type X with app (iOS or Android)
MANUFACTURER	Lutron



SENSOR COVERAGE PATTERNS

9' height: ø12' coverage



Motion Sensor Coverage

CEILING HEIGHT	COVERAGE AREA (SQ FT)
8'	114
9'	144
10'	178
12'	256

SENSOR DETAIL



Dimensions: ø1-1/8"

ATHENA CONTROL OPTIONS


CATALOG NUMBER	DESCRIPTION
AWNDR	Lutron Athena wireless node integral fixture control, RF only, for use with D4i DALI-2 or driver with 12V auxiliary power.
AWNS	Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing, for use with D4i DALI-2 or driver with 12V auxiliary power.
AWNDR-BL	Lutron Athena wireless node integral fixture control, RF only, for use with D4i DALI-2 or driver with 12V auxiliary power, black finish.
AWNS-BL	Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing, for use with D4i DALI-2 or driver with 12V auxiliary power, black finish.

VDO Lutron Vive integral fixture control, RF with daylight and occupancy sensor (DFCSJ-OEM-OCC). DSR or LDE Drivers only. LDE drivers require driver interface

SPECIFICATIONS	
TYPE	PIR Motion + Daylight
MOUNTING HEIGHT	8' – 12'
DETECTION ANGLE	360°
TEMPERATURE RANGE	0° to 55°C
RELATIVE HUMIDITY	0 to 90%, non-condensing
COMMISSIONING	App (iOS or Android)
MANUFACTURER	Lutron

SENSOR COVERAGE PATTERNS

9' height: ø12' coverage



Motion Sensor Coverage

CEILING HEIGHT	COVERAGE AREA (SQ FT)
8'	114
9'	144
10'	178
12'	256

SENSOR DETAIL



Dimensions: 2-11/16" x 1"

VIVE CONTROL OPTIONS

CATALOG NUMBER	DESCRIPTION
VRF	Lutron Vive integral fixture control, RF only (DFCSJ-OEM-RF), for use with sensor-ready driver
VDO	Lutron Vive integral fixture control, RF with daylight and occupancy sensor (DFCSJ-OEM-OCC), for use with sensor-ready driver
VRF/DBI	Lutron Vive integral fixture control, RF only (DFCSJ-OEM-RF) and digital link interface, for use with Lutron Hi-lume 1% EcoSystem dimming LED driver
VDO/DBI	Lutron Vive integral fixture control, RF with daylight and occupancy sensor (DFCSJ-OEM-OCC) and digital link interface, for use with Lutron Hi-lume 1% EcoSystem dimming LED driver

ADDITIONAL DRIVER OPTIONS

Note: Lumen restrictions apply, consult product builder at hew.com/product-builder

CATALOG NUMBER	DESCRIPTION
DRV	Driver without external dimming wires prewired for non-dimming applications
DIM	Driver with external dimming wires prewired for 0-10V low voltage applications
DIM1	1% driver with external dimming wires prewired for 0-10V low voltage applications
DIM LINE	Line voltage dimming driver (TRIAC and ELV compatible, 120V only)
DIM TRC	Line voltage dimming driver (TRIAC compatible, 120V only)
DA	Driver with 12V auxiliary power, without external dimming wires
DSR	Sensor-ready driver without external dimming wires (D4i DALI-2)
SD40	40% step-dimming driver
SD50	50% step-dimming driver
DALI	DALI dimming driver
LDE1	Lutron Hi-lume 1% EcoSystem dimming driver

