

CATALOG #: \_\_\_\_\_

Type: \_\_\_\_\_

PROJECT: \_\_\_\_\_

**FEATURES**

- Tunable white from 3000K to 5000K CCT, minimum 80 CRI
- Pick from two small-scale architectural styles, ClassicLine or CurviLine
- Control direct and indirect lighting independently using a pull chain or bedside controller
- Designed with the appearance of finely crafted carpentry
- Precision reflectors and diffusing elements produce comfortable ambient light along with a highly functional reading light
- Small scale design complements architecture with minimal impact on space
- The direct and indirect components are fully isolated and separately switchable using a pull chain, bedside controller, or wall switch
- Heavy-duty extruded aluminum housing ensures superior durability while providing crisp design detail
- Anti-microbial white finish is standard
- Made Right Here® in the USA

**SPECIFICATIONS**

- **HOUSING** – Seam-welded extruded aluminum.
- **REFLECTIVE SURFACES** – 92% minimum average reflective white polyester powder coat on interior steel components.
- **SHIELDING** – Frosted acrylic or inverted prismatic frosted acrylic.
- **FINISH** – Textured anti-microbial matte white polyester TGIC powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- **ELECTRICAL** – High quality mid-power LED board. L70 > 60,000 hours per IES TM-21. Tunable White products use LEDs of multiple CCTs and may produce a perceptibly different shade of white from single-CCT products at the same CCT. All CCTs are within 3 MacAdam ellipses.
- **MOUNTING** – Wall mounts over 4" x 2" horizontal junction box.
- **LISTINGS** –
  - cCSAus certified as luminaire suitable for dry or damp locations.
- **WARRANTY** – 5-year limited warranty, see [hew.com/warranty](http://hew.com/warranty).

**ORDERING EXAMPLE: CB CL - 4 - L40U / L40D / 8TW - AF125 - OPTIONS - DALI - UNV**

**ORDERING INFO**

SERIES	STYLE	LENGTH	LUMEN PACKAGE (EXAMPLE: L40U/L40D/8TW)			SHIELDING	
CB	CL	ClassicLine	4 4'	Specify lumen packages: <b>U</b> for Uplight and <b>D</b> for Downlight			<b>AF12125</b>
	CV	CurviLine		<b>LUMENS</b> <sup>[1]</sup>	<b>U OR D</b>	<b>COLOR</b>	Inverted frosted acrylic, pattern 12, .125" thick
				<b>L25</b> 2,500lm	<b>U</b> Uplight	<b>8TW</b> Tunable white (80 CRI, 3000K–5000K)	<b>AF125</b>
			<b>L40</b> 4,000lm	<b>D</b> Downlight		Frosted acrylic, .125" thick	

**OPTIONS** <sup>[2]</sup>

**GLR** Fuse, fast blow <sup>[4]</sup>  
**(L\_\_)** Additional lower lumen packages available. <sup>[5]</sup>  
 Example: 3,500 nominal lumens = CBCL-4-L40U/L40D/8TW-(L35D)

**SPECIFY R FOR RIGHT AND L FOR LEFT** <sup>[6]</sup>

**NL\_** LED nightlight/chartlight  
**NL\_/WRS/120** LED nightlight/chartlight and white rocker  
**PS\_/120** Single-circuit pull switch, operates down light  
**PS2\_/120** Two-circuit, 4-position pull switch  
**GCO\_** Grounded convenience outlet

**CONTROL** <sup>[3]</sup>

**DALI** Driver prewired for DALI applications  
**DIM** Dimming driver with (1) 0-10V signal to control dimming and (1) 0-10V signal to control CCT  
**DMX** Driver prewired for DMX applications  
**PSQ** Lutron T-Series 2-channel tunable white 1%.

**VOLTAGE**

**120** 120V  
**277** 277V  
**UNV** 120-277V

**NOTES**

- <sup>1</sup> Lumen output based on 4000 CCT. Actual lumens may vary +/-5%, see page 2 for FIXTURE PERFORMANCE DATA. Additional lumen packages available, see options.
- <sup>2</sup> See page 3 for FINISH OPTIONS. See page 2 for LOW-VOLTAGE CONTROLLER.
- <sup>3</sup> See page 3 for CONTROL DETAILS.
- <sup>4</sup> Specify voltage, one per driver.
- <sup>5</sup> Specify in increments of 100 nominal lumens. Option must be specified with next higher lumen package.
- <sup>6</sup> 120V only.




**FIXTURE PERFORMANCE DATA**

LED PACKAGE	TOTAL DELIVERED LUMENS	TOTAL WATTAGE	TOTAL EFFICACY (lm/W)
L25	5090	54.7	93.0
L40	8004	91.3	87.7

- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Wattage shown is average for 120V through 277V input.
- Results based on 4000K, 80 CRI, actual lumens may vary +/-5%
- Use multiplier table to calculate additional options.


**MULTIPLIER TABLE**

CCT	CONVERSION FACTOR	
	LUMENS	WATTAGE
3000K	0.95	1.04
3500K	0.98	1.02
4000K	1.00	1.00
5000K	0.96	1.04



**PHOTOMETRY**

CBCL-4-L40U/L40D/8TW-AF125-DALI-UNV Report #: 19020.0; 08/06/15 | Total Luminaire Output: 8004 lumens; 91.3 Watts | Efficacy: 88.0 lm/W | 80 CRI; 4000K CCT

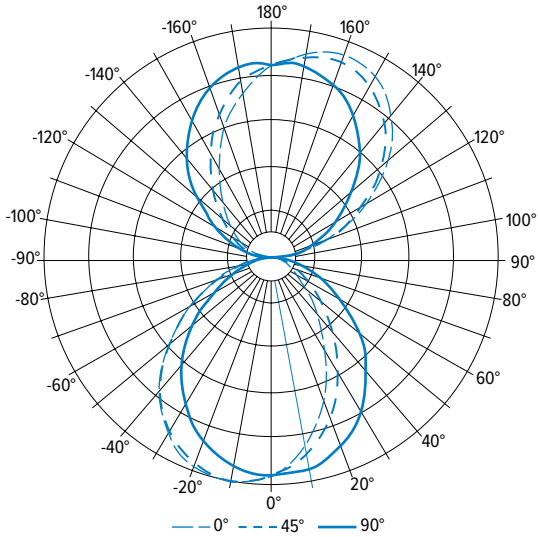

VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
	0°	45°	90°	135°	180°	
0	1716	1716	1716	1716	1716	
5	1618	1650	1711	1770	1767	162
15	1338	1455	1641	1780	1799	454
25	977	1158	1485	1703	1724	657
35	628	852	1262	1523	1539	739
45	372	566	987	1244	1258	698
55	206	349	696	914	926	568
65	91	177	435	589	616	390
75	24	51	206	331	352	209
85	7	7	43	120	140	71
90	6	8	15	42	63	
95	17	53	87	78	64	79
105	303	326	255	185	152	255
115	653	657	460	325	271	460
125	1016	956	673	478	397	627
135	1313	1238	933	654	550	727
145	1556	1469	1169	862	750	730
155	1675	1595	1356	1104	972	621
165	1678	1624	1483	1321	1220	415
175	1564	1564	1542	1478	1423	145
180	1521	1521	1521	1521	1521	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1273	16
0 - 40	2012	25	
0 - 60	3277	41	
0 - 90	3947	49	
90 - 120	794	10	
90 - 150	2878	36	
90 - 180	4057	51	
0 - 180	8004	100	


**LOW-VOLTAGE CONTROLLER**

EXAMPLE: LVC3A/R/N			
CONTROLLER	LOAD 1	LOAD 2	LOAD 3
LVC1 1-circuit	U Up D Down N Nurse		
LVC2 2-circuit	U/ Up D/ Down	D/ Down N/ Nurse	
LVC3 Dimming control	DIMU/ Uplight, 0-10 dimming <sup>1</sup> DIMD/ Downlight, 0-10 dimming <sup>1</sup>	U/ Up D/ Down N/ Nurse	N Nurse
	DIMU/DIMD/ Uplight and downlight, 0-10 dimming <sup>1</sup>		



<sup>1</sup> Smooth dimming of the load utilizing a single, dry contact, momentary, normally open switch which will dim from 25% up to 100% while holding down the switch.




**CROSS SECTIONS**

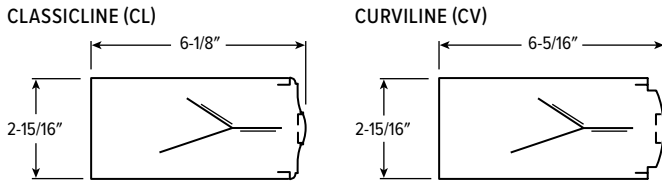

**FIXTURE DETAILS**

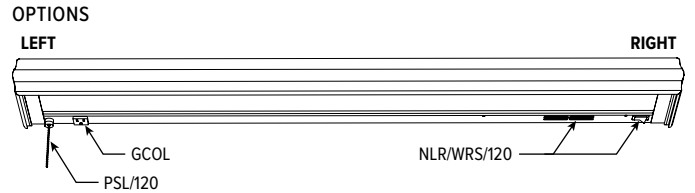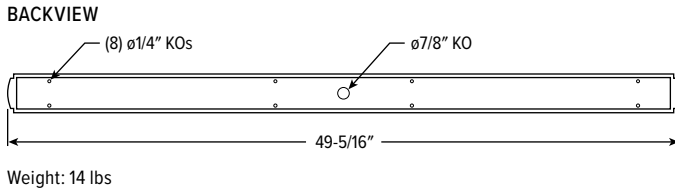

**FINISH OPTIONS**

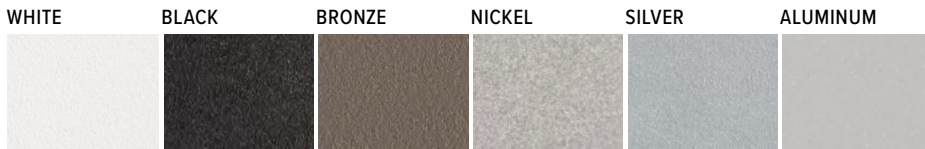

For custom color, please specify RAL code or a manufacturer code with description. All custom colors other than RAL require two sample swatches, minimum 1" square.

**CONTROL DETAILS**

