

CATALOG #: _____

Type: _____

PROJECT: _____

FEATURES

- Provides 90 minutes of emergency operation
- Ultra-bright, energy-efficient, long-life LEDs
- Adjustable heads provide optimal center-to-center spacing
- High-performance reflector and plastic lens for optimal light distribution
- Fully automatic solid-state two rate charger recharges battery in 24 hours
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing

ORDERING EXAMPLE: EMER/CP/ADJ/LED - WHT - OPTIONS - D

ORDERING INFO

SERIES	HOUSING COLOR	OPTIONS	VOLTAGE
EMER/CP/ADJ/LED	WHT Industry-standard white BLK Black	PC3 Polycarbonate shield ^[1] WG Wireguard, white ^[2]	D 120V/277V SV__ Special voltage ^[3]

SPECIFICATIONS

- HOUSING** – Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- LAMP HEADS** – Chrome-plated metallized reflector and plastic lens.
- ELECTRICAL** – Dual 120/277 voltage standard. 1.0 watt (8 LEDs x 0.125W) per head. 3.6V long life, maintenance-free, rechargeable NiCd battery.
- MOUNTING** – Wall or ceiling mount. Knockout for conduit applications. Universal knockout pattern on back plate for surface mount.
- LISTINGS** –
 - UL 924 standard as an emergency light suitable for dry or damp locations (0°C - +50°C).
 - Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- WARRANTY** – 5-year limited warranty.

NOTES


¹ Ships separately. See page 2 for OPTIONS DETAILS.
² Ships separately. See page 2 for OPTIONS DETAILS.

³ UL Listed for 208/220/240 Volt, 50/60Hz.


EMER/CP/ADJ/LED LED Adjustable Compact Emergency Light

CROSS SECTIONS


FRONT | SIDE VIEW

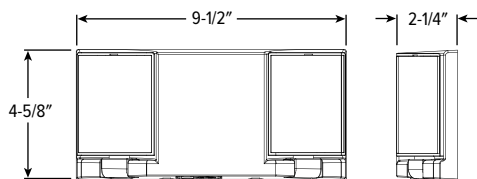

BOTTOM VIEW




TOP VIEW




FIXTURE DETAILS

WALL MOUNT BOLT CIRCLE PATTERN

Not to scale.

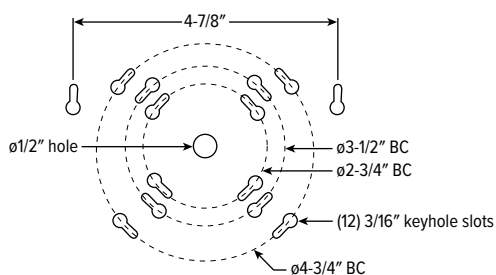

ADJUSTABLE LAMP HEADS



ELECTRICAL INFORMATION

	INPUT WATTS (W)	INPUT AMPS (A)
120V	2.1	0.025
277V	2.1	0.01

OPTIONS DETAILS


Ships separately.

PC3



DIMENSIONS: 7-1/2" x 18" x 7"

WG



DIMENSIONS: 13-3/4" x 15-1/4" x 6"