


# EMER/DECO LED Decorative Emergency Light



CATALOG #: \_\_\_\_\_

Type: \_\_\_\_\_

PROJECT: \_\_\_\_\_

## FEATURES

- Decorative, low-profile, architectural design
- Factory-installed photocell included
- Long-life, efficient ultra-bright 5-watt LED illumination
- 5000K CCT and minimum 70 CRI
- 4.8V long-life, maintenance-free NiCd battery provides 90 minutes of emergency operation
- Fully automatic operation recharges battery in 24 hours
- Built-in test switch
- Charge rate/power on LED indicator light
- Self-diagnostic testing standard
- Prismatic polycarbonate refractor and mirror-bright reflector for maximum illumination
- Standard operating temperature of 32°F to 122°F
- Standard normally-on or normally-off and switched circuit

## SPECIFICATIONS

- HOUSING** – Powder coated finish on die-cast aluminum housing.
- ELECTRICAL** – Universal voltage, 120-277 VAC operation.
- MOUNTING** – Wall or conduit entry through top.
- LABELS** – Listed to UL 924 standard as an emergency light suitable for wet locations (0°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- WARRANTY** – 5-year limited warranty.

## ORDERING EXAMPLE: EMER/DECO - DBR - OPTIONS - D

### ORDERING INFO

SERIES	HOUSING COLOR	OPTIONS	VOLTAGE
EMER/DECO	<b>DBR</b> Dark bronze <sup>[1]</sup>	<b>LT</b> Low temperature <sup>[2]</sup>	<b>D</b> 120 - 277V
	<b>BLK</b> Black		
	<b>WHT</b> White		
	<b>NKL</b> Nickel		

### QUICKSHIP

EMER/DECO-DBR-QS-D

## NOTES

- <sup>1</sup> Standard.
- <sup>2</sup> Temperatures as low as -20°C – 40°C




# EMER/DECO LED Decorative Emergency Light

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EMER/DECO	2.7	2.8	0.026	0.012
EMER/DECO-LT	2.9	3.0	0.031	0.014

## CROSS SECTIONS

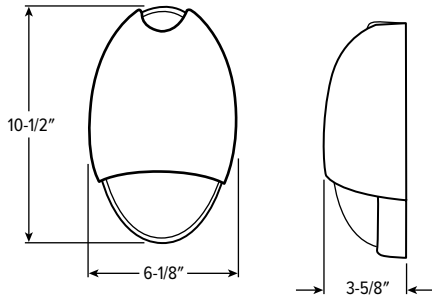

## FIXTURE DETAILS

### BACKVIEW

