


CATALOG #:



UL
924

TYPE:

PROJECT:

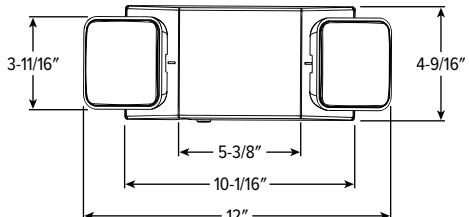

FEATURES

- Provides 90 minutes of emergency operation
- Ultra-bright, energy-efficient, long-life LEDs
- Adjustable heads provide optimal center-to-center spacing
- High-performance reflector and plastic lens for optimal light distribution
- Fully automatic solid-state two rate charger recharges battery in 24 hours
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing

ORDERING INFO

CATALOG NUMBER	HOUSING COLOR	VOLTAGE	UPC CODE
EMER/LED-WHT-QS-D	Industry-standard white	120V/277V	850047638014

SPECIFICATIONS


- HOUSING – Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- LAMP HEADS – Chrome-plated metallized reflector and plastic lens.
- ELECTRICAL – Dual 120/277 voltage standard. 1.0 watt (8 LEDs x 0.125W) per head. 3.6V long life, maintenance-free, rechargeable NiCd battery.
- MOUNTING – Wall or ceiling mount. Knockout for conduit applications. Universal knockout pattern on back plate for surface mount.
- LISTINGS –
 - UL 924 standard as an emergency light suitable for dry or damp locations (0°C - +50°C).
 - Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- WARRANTY – 5-year limited warranty

EMER/LED LED QuickShip Emergency Light




DIMENSIONS

FRONT VIEW

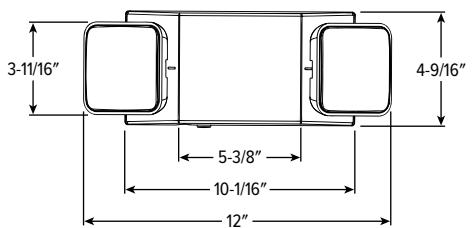


TOP VIEW

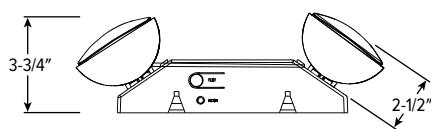

MOUNTING DETAILS


WALL MOUNT BOLT CIRCLE PATTERN

Not to scale.

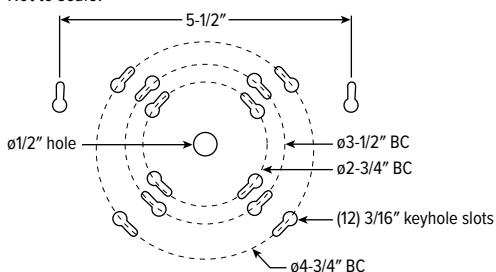

FOOTPATH

EMER/LED-WHT-HL Meets Life Safety Code: Average illuminance of 1.0 FC with minimum illuminance of 0.1 FC. Reflectance values: 80/50/20. Fixture Mounting Height: 8' AFF

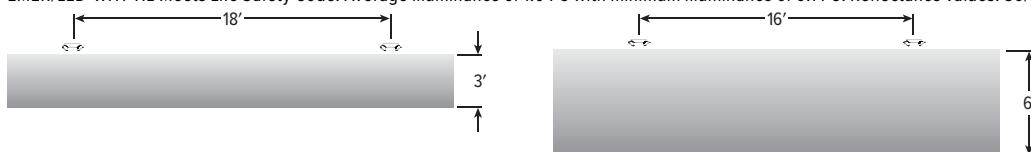

Average: 1.11 | Max: 2.3 | Min: 0.2 | Average min: 5.6 | Max/Min: 11.5

Average: 1.08 | Max: 2.4 | Min: 0.3 | Average min: 3.6 | Max/Min: 8.0

ELECTRICAL INFORMATION

INPUT WATTS (W)		INPUT AMPS (A)	
120V	277V	120V	277V
1.8	1.8	0.022	0.010