

CATALOG #: \_\_\_\_\_

TYPE: \_\_\_\_\_

PROJECT: \_\_\_\_\_

## FEATURES

- Provides 90 minutes of emergency operation
- Ultra-bright, energy-efficient, long-life LEDs
- Sealed and gasketed weather proof housing and lamp heads
- Remote capable
- High-performance reflector and glass lens for optimal light distribution
- Fully automatic solid-state two rate charger recharges battery in 24 hours
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing

## SPECIFICATIONS

- HOUSING** – Corrosion-resistant 5VA flame retardant UV-stabilized polycarbonate in gray or black finish. Sealed and gasketed housing with hinged cover. Sealed test switch.
- LAMP HEADS** – Chrome-plated metallized reflector and tempered glass.
- ELECTRICAL** – Dual 120/277 voltage. 9.6V long life, maintenance-free, rechargeable NiCd battery. Remote capacity of 3.7W standard in operating temperatures of 0°C – 50°C. 1.875 watt (15 LEDs x 0.125) per head.
- MOUNTING** – External mounting brackets for simplified wall mounting. Knockout for conduit applications.
- LISTINGS** –
  - UL 924 standard as an emergency light suitable for wet locations (-20°C - +50°C).
  - Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- WARRANTY** – 5-year limited warranty.

## ORDERING EXAMPLE: EMER/W - GRY - OPTIONS - D

### ORDERING INFO

SERIES	HOUSING COLOR	OPTIONS	VOLTAGE
EMER/W	GRAY Gray BLK Black	PC2 Polycarbonate shield <sup>[1]</sup> WG Wireguard, white <sup>[2]</sup>	D 120V/277V

### REMOTE HEADS: WETRHL - P - GRAY - OPTIONS - MV <sup>[3]</sup>

SERIES	HOUSING	HOUSING COLOR	OPTIONS	VOLTAGE
WETRHL	Wet location single remote head, 8 LEDs	P Polycarbonate D Die-cast	BLK Black GRAY Gray	HL 1.5-watt remote head, 12 LEDs MV Multi-voltage <sup>[4]</sup>
WETDRHL	Wet location dual remote head, 8 LEDs			

## NOTES


- <sup>1</sup> Ships separately. See page 2 for OPTIONS DETAILS.
- <sup>2</sup> Ships separately. See page 2 for OPTIONS DETAILS.
- <sup>3</sup> Optional. Ships separately. See page 2 for REMOTE HEAD DETAILS.

<sup>4</sup> For use with 3.6V, 6V, 9.6V, or 12V power source.


# EMER/W<sup>LED</sup> Emergency Light - Wet Location

## MOUNTING DETAILS

BACKVIEW

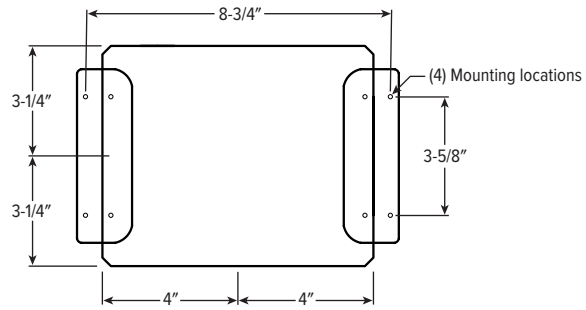

RIGHT SIDE VIEW

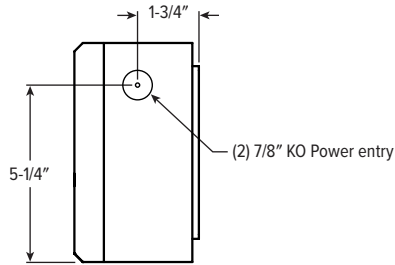

## REMOTE HEAD DETAILS

WETRHL



DIMENSIONS: 4-1/2" x 6-5/8"

WETDRHL



DIMENSIONS: 10-3/8" x 6-3/4"


## OPTIONS DETAILS

PC2



DIMENSIONS: 15" x 22" x 7-3/4"

WG

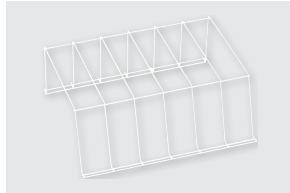

DIMENSIONS: 13-3/4" x 15-1/4" x 6"