

CATALOG #: _____

Type: _____

PROJECT: _____

FEATURES

- Premium-grade cast aluminum housing in choice of three faceplate finishes
- Compact, low profile design
- Optional tamper-resistant hardware helps discourage unauthorized access to the unit
- Available as full-time AC powered unit or emergency unit with battery backup
- EM unit provides 90 minutes of emergency operation
- Ultra-bright, energy-efficient, long-life LEDs in red or green
- Fully automatic solid-state two rate charger on EM unit recharges battery in 24 hours
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- Unique design allows double face conversion in the field
- Removable directional indicators
- Self-diagnostic option performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes

ORDERING EXAMPLE: EXIT/CA - R - AF - WHT - AC - OPTIONS - D

ORDERING INFO

| SERIES | LETTER COLOR | FACEPLATE FINISH | HOUSING COLOR | POWER OPTIONS |
|---------|------------------|---|---|--|
| EXIT/CA | R Red G Green | AF Brushed aluminum BF Black WF Industry-standard white | BA Brushed aluminum BLK Black WHT Industry-standard white | AC AC operation EM AC operation with emergency battery backup |

| OPTIONS | VOLTAGE |
|---|-------------|
| DC Dual circuit ^[1] | D 120V/277V |
| SDT Self-diagnostic test ^[2] | 120 120V |
| TP Tamper-resistant hardware | 277 277V |
| PC1 Polycarbonate shield ^[3] | |
| WG Wireguard, white ^[4] | |

SPECIFICATIONS

- HOUSING** – Premium-grade cast aluminum.
- ELECTRICAL** – Dual 120/277 voltage standard. 4.8V long life, maintenance-free, rechargeable NiCd battery when specified with EM power option.
- MOUNTING** – Aluminum mounting canopy for top or end installation. Universal knockout pattern on back plate for wall mount.
- LISTINGS** –
 - UL 924 standard as an exit light suitable for dry or damp locations (0°C - +50°C).
 - Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
 - Certified to CEC under Title 20 Regulations.
- WARRANTY** – 5-year limited warranty.

NOTES

- AC only. Must specify 120V or 277V.
- EM only.
- Wall mount only. Ships separately. See page 2 for OPTIONS DETAILS.


- Wall mount only. Ships separately. See page 2 for OPTIONS DETAILS.

EXIT/CA ^{LED} Cast Aluminum Exit Sign

FIXTURE DETAILS

WALL MOUNT BOLT CIRCLE PATTERN

Not to scale.

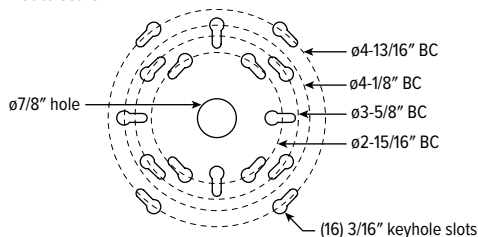

ELECTRICAL INFORMATION

| CATALOG NUMBER | INPUT WATTS (W) | | INPUT AMPS (A) | |
|---------------------|-----------------|------|----------------|-------|
| | 120V | 277V | 120V | 277V |
| EXIT/CA-R-EM-DC-SDT | 3.2 | 3.6 | 0.031 | 0.019 |
| EXIT/CA-G-EM-DC-SDT | 3.8 | 4.4 | 0.033 | 0.017 |

OPTIONS DETAILS


Wall mount only. Ships separately.

PC1



DIMENSIONS: 13-3/16" x 9-3/16" x 2-1/2"

WG



DIMENSIONS: 13-3/4" x 15-1/4" x 6"