

NEW YORK CITY-APPROVED EDGE-LIT LED EXIT SIGN

EXIT/EL/NYC

CATALOG #: _____ TYPE: _____

PROJECT: _____ NOTES: _____


LED



EXAMPLE → **EXIT/EL/NYC - SF - CP - AN - AC - OPTIONS - D**

SERIES NUMBER OF FACES FACEPLATE FINISH HOUSING COLOR POWER OPTIONS OPTIONS/ACCESSORIES VOLTAGE

CROSS SECTIONS

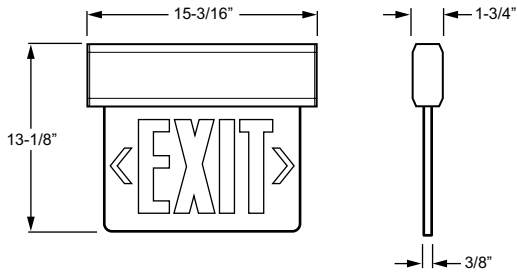

ORDERING INFORMATION

SERIES	
EXIT/EL/NYC	New York City-Approved Edge-Lit LED Exit Sign
NUMBER OF FACES (Must specify)	
SF	Single face
DF	Double face (MP and WP faceplate finish only)
FACEPLATE FINISH (Must specify)	
CP	Clear Panel (Single face (SF) only)
MP	Mirror Panel
WP	White Panel

HOUSING COLOR (Must specify)	
BLK	Black
AN	Anodized aluminum
WHT	Industry-standard white
POWER OPTIONS (Must specify)	
AC	AC operation
EM	AC operation with emergency battery backup
OPTIONS	
SDT	Self-diagnostic test (EM only)
ACCESSORIES (Shipped separately)	
See back for details.	
PC2	Polycarbonate shield (wall mount only)
WG/COMBO	Wireguard (wall mount only)
VOLTAGE	
D	120V or 277V
SV__	Special voltage, consult factory for options (not available with SDT)

FEATURES

- ▶ New York City-approved 8" tall red letters.
- ▶ Ultra-bright, energy efficient, long-life LEDs available in red.
- ▶ UV stabilized, ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- ▶ Available as a full-time AC powered unit or emergency unit with battery backup.
- ▶ Fully automatic solid-state system on EM units recharges battery in 24 hours.
- ▶ Charge rate/power on LED indicator and built-in test switch on emergency units.
- ▶ Directional indicators can be installed on-site.
- ▶ Compact, low profile design.
- ▶ 4.8V long-life, maintenance-free NiCd battery on emergency (EM) units provides 90 minutes of emergency operation.

LED

SPECIFICATIONS

Housing – Premium-grade, extruded aluminum housing

Electrical – Universal voltage, 120 or 277 VAC operation.

Mounting – Aluminum mounting canopy for ceiling, side, or wall mount installation.


Labels – Listed to UL 924 standard as an exit light suitable for dry or damp locations (20°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty – 5-year limited warranty

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EXIT/EL/NYC-EM	4.2	4.2	0.030	0.020

ACCESSORIES

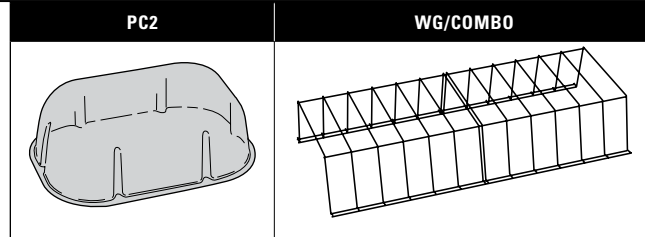

FIXTURE DETAILS

