

# RECESSED EDGE-LIT LED EXIT SIGN

# EXIT/EL/RECESSED

CATALOG #:	TYPE:
PROJECT:	NOTES:


LED



**EXAMPLE** EXIT/EL/RECESSED - SF - R - CP - AN - AC - OPTIONS - D

SERIES
NUMBER
LETTER
FACEPLATE
HOUSING
POWER
OPTIONS
VOLTAGE

## CROSS SECTIONS

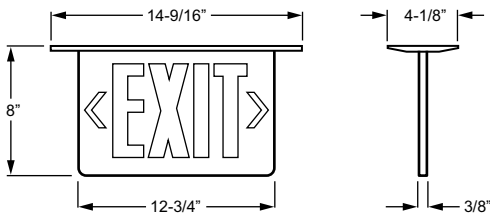

Recommended ceiling opening: 14-1/2" x 3-1/8"

## ORDERING INFORMATION

### SERIES

**EXIT/EL/RECESSED** Recessed Edge-Lit LED Exit Sign

### NUMBER OF FACES (Must specify)

**SF** Single face  
**DF** Double face (MP and WP faceplate finish only)

### LETTER COLOR (Must specify)

**R** Red  
**G** Green

### FACEPLATE FINISH (Must specify)

**CP** Clear panel (SF only)  
**MP** Mirror panel  
**WP** White panel

### HOUSING COLOR (Must specify)

**AN** Anodized aluminum  
**BLK** Black  
**WHT** Industry-standard white

### POWER OPTIONS (Must specify)

**AC** AC operation  
**EM** AC operation with emergency battery backup

### OPTIONS

**COPY** Consult factory for custom message  
**DC** Dual circuit (AC only; 120/277V only)  
**SDT** Self-diagnostic test (EM only)  
**WM** Wall Mount (SF only; see back for details)

### OPTIONS

**D** 120V or 277V  
**SV\_\_** Special voltage, consult factory for options (not available with SDT)

## FEATURES

- ▶ Ultra-bright, energy efficient, long-life LEDs available in red or green.
- ▶ UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- ▶ Available as full-time AC powered unit or emergency unit with battery backup.
- ▶ Fully automatic solid-state system on EM units recharges battery in 24 hours.
- ▶ Compact, low profile design.
- ▶ Directional indicators can be installed on-site.
- ▶ Charge rate/power on LED indicator and built-in test switch on emergency units.
- ▶ 4.8V long-life, maintenance-free, NiCd battery on emergency (EM) units provides 90 minutes of emergency operation.
- ▶ Custom messages available, consult factory for details.

# EXIT/EL/RECESSED

# RECESSED EDGE-LIT LED EXIT SIGN

LED

## SPECIFICATIONS

**Housing** – Premium-grade extruded aluminum

**Electrical** – Universal voltage, 120 or 277 VAC operation.

**Mounting** – Recessed. Compatible with drywall or drop ceiling installations. Bar hangers included.

**Labels** – Listed to UL 924 standard as an exit light suitable for dry or damp locations (0°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

**Warranty** – 5-year limited warranty

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EXIT/EL/RECESSED	3.8	4.5	0.030	0.020

## FIXTURE DETAILS

### WALL MOUNT OPTION

