


# EXIT/EL/RECESSED LED Recessed Edge-Lit Exit Sign

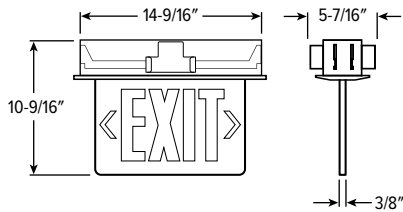

CATALOG #: \_\_\_\_\_

Type: \_\_\_\_\_

PROJECT: \_\_\_\_\_

## FEATURES

- Compact, low profile design
- Battery and wiring accessible from roomside
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination
- Available as full-time AC powered unit or emergency unit with battery backup
- EM unit provides 90 minutes of emergency operation
- Ultra-bright, energy-efficient, long-life LEDs in red or green
- Fully automatic solid-state two rate charger on EM unit recharges battery in 24 hours
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- Directional indicators can be installed on-site
- Self-diagnostic option performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes

## SPECIFICATIONS

- **HOUSING** – Premium-grade, extruded aluminum housing.
- **ELECTRICAL** – Dual 120/277 voltage standard. 4.8V long life, maintenance-free, rechargeable NiCd battery when specified with EM power option.
- **MOUNTING** – Recessed. Compatible with drywall or drop ceiling installations. Bar hangers included. Wall mount available, see options.
- **LISTINGS** –
  - UL 924 standard as an exit light suitable for dry or damp locations (0°C - +50°C).
  - Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
  - Certified to CEC under Title 20 Regulations.
- **WARRANTY** – 5-year limited warranty.

## ORDERING EXAMPLE: EXIT/EL/RECESSED - SF - R - CP - AN - AC - OPTIONS - D

### ORDERING INFO

SERIES	NUMBER OF FACES	LETTER COLOR	FACEPLATE FINISH	HOUSING COLOR
EXIT/EL/RECESSED	SF Single face	R Red	CP Clear panel <sup>[2]</sup>	AN Anodized aluminum
	DF Double face <sup>[1]</sup>	G Green	MP Mirror Panel	BLK Black
			WP White Panel	WHT Industry-standard white

POWER OPTIONS <sup>[3]</sup>	OPTIONS	VOLTAGE
AC AC operation	COPY Consult factory for custom message	D 120V/277V
EM AC operation with emergency battery backup	DC Dual circuit <sup>[4]</sup>	120 120V
	SDT Self-diagnostic test <sup>[5]</sup>	277 277V
	WM Wall Mount <sup>[6]</sup>	SV__ Special voltage <sup>[7]</sup>

### NOTES

- <sup>1</sup> MP and WP faceplate finish only.  
<sup>2</sup> SF only.  
<sup>3</sup> Must specify.  
<sup>4</sup> AC only. Must specify 120V or 277V.  
<sup>5</sup> EM only.

- <sup>6</sup> SF only. See page 2 for FIXTURE DETAILS.  
<sup>7</sup> Not available with SDT. UL Listed for 208/220/240 Volt, 50/60Hz.

# EXIT/EL/RECESSED LED Recessed Edge-Lit Exit Sign

## FIXTURE DETAILS

### WALL MOUNT

