

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Ultra-bright, energy efficient, long-life LEDs available in red or green.
- Ceiling, side, or wall mount.
- Fully automatic solid-state system on EM units recharges battery in 24 hours.
- Compact, low profile design.
- Available as full-time AC powered unit or emergency unit with battery backup.
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Directional indicators can be installed on-site.
- Charge rate/power on LED indicator and built-in test switch on emergency units.
- 4.8V long-life, maintenance-free NiCd battery on emergency (EM) units provides 90 minutes of emergency operation.
- Custom messages available, consult factory for details.

SPECIFICATIONS

- HOUSING** – Premium-grade extruded aluminum
- ELECTRICAL** – Universal voltage, 120 or 277 VAC operation.
- MOUNTING** – Aluminum mounting canopy for ceiling, side, or wall mount installation.
- LABELS** – Listed to UL 924 standard as an exit light suitable for dry or damp locations (0°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- WARRANTY** – 5-year limited warranty, see hew.com/warranty.

ORDERING EXAMPLE: EXIT/EL - SF - R - CP - AN - AC - OPTIONS - D

ORDERING INFO

SERIES	NUMBER OF FACES	LETTER COLOR	FACEPLATE FINISH	HOUSING COLOR	POWER OPTIONS
EXIT/EL	SF Single face	R Red	CP Clear Panel ^[1]	AN Anodized aluminum	AC AC operation
	DF Double face	G Green	MP Mirror panel WP White panel	BLK Black WHT Industry-standard white	EM AC operation with emergency backup battery

OPTIONS

OPTIONS	VOLTAGE
COPY Consult factory for custom message	D 120V or 277V
DC Dual circuit ^[2]	120 120V
SDT Self-diagnostic test ^[3]	277 277V
PC2 Polycarbonate shield ^[4]	SV__ Special voltage ^[6]
WG Wireguard ^[5]	

NOTES

- SF only
- AC only; must specify voltage, 120 or 277V only.
- EM only
- Shipped separately. See page 2 for OPTIONS DETAILS.


- Shipped separately; wall mount only. See page 2 for OPTIONS DETAILS.
- Consult factory for options; not available with SDT or DC

EXIT/EL LED Edge-Lit Exit Sign

ELECTRICAL INFORMATION


CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EXIT/EL	3.8	4.5	0.03	0.02

CROSS SECTIONS

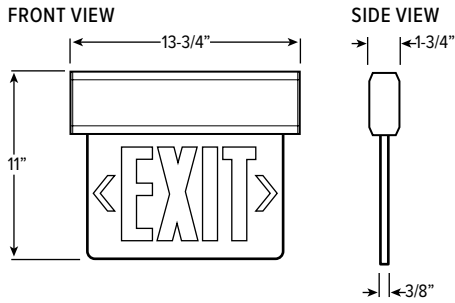


OPTIONS DETAILS

PC2




WG




MOUNTING DETAILS

CEILING MOUNT



SIDE MOUNT



WALL MOUNT

