

NEW YORK CITY-APPROVED LED EXIT SIGN

EXIT/NYC

LED

CATALOG #: _____ TYPE: _____

PROJECT: _____


NOTES: _____

EXAMPLE → **EXIT/NYC - EM - WHT - OPTIONS - D**

SERIES POWER OPTIONS DIRECTIONAL ARROWS OPTIONS/ACCESSORIES VOLTAGE



CROSS SECTIONS

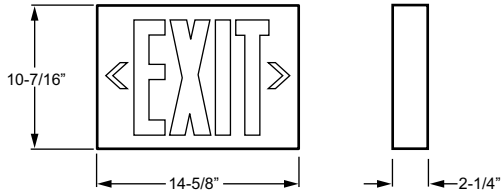

ORDERING INFORMATION

SERIES

EXIT/NYC New York City-Approved LED Exit Light

POWER OPTIONS (Must specify)

AC AC operation (120V only)
EM AC operation with Emergency Battery Backup

HOUSING COLOR (Must specify)

BLK Black
WHT Industry-standard White

ACCESSORIES (Shipped separately)

See back for details.
PC2 Polycarbonate shield
WG Wireguard

VOLTAGE

D 120V or 277V

FEATURES

- ▶ New York City-approved 8" tall red letters.
- ▶ Ultra-bright, energy efficient, long-life LEDs available in red.
- ▶ Available as a full-time AC powered unit or emergency unit with battery backup.
- ▶ Fully automatic solid-state system on EM units recharges battery in 24 hours.
- ▶ Charge rate/power on LED indicator and built-in test switch on emergency units.
- ▶ 3.6V long-life, maintenance-free NiCd battery on emergency (EM) units provides 90 minutes of emergency operation.
- ▶ Removable directional indicators.
- ▶ Unique design allows double face conversion in the field.
- ▶ Available with industry-standard white or black housing.

LED

ELECTRICAL INFORMATION

SPECIFICATIONS

Housing – Durable, powder-coated 20-gauge steel construction.

Electrical – Universal voltage, 120 or 277 VAC operation.

Mounting – Surface or ceiling. Top and side knockout for conduit feed applications.

Labels – Listed to UL 924 standard as an exit light suitable for dry or damp locations (20°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty – 5-year limited warranty

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EXIT/NYC-EM	5.0	5.0	0.041	0.018

ACCESSORIES

PC2	WG
