


# EXIT/REMOTE LED Exit Sign with Remote

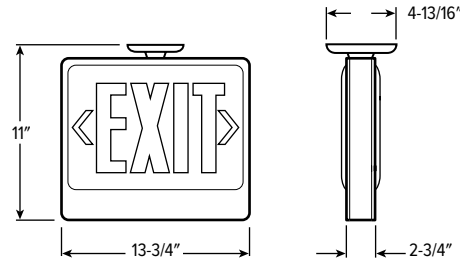

CATALOG #: \_\_\_\_\_

TYPE: \_\_\_\_\_

PROJECT: \_\_\_\_\_

## FEATURES

- Ultra-bright, energy efficient, long-life LEDs available in red or green
- 6-volt, sealed lead acid, maintenance-free battery provides 90 minutes of emergency operation
- Automatic, low voltage disconnect (LVD) activates unit in event of partial power failure or brownout
- Removable directional indicators
- Fully automatic solid-state system on EM units recharges battery in 24 hours
- Charge rate/power on LED indicator and built-in test switch
- Unique design allows double face conversion in the field
- Available with industry-standard white or black housing
- Larger battery supports 11-watt remote capability
- Battery supports 10.8-watt remote capability

## ORDERING EXAMPLE: EXIT/REMOTE - R - WHT - OPTIONS - D

### ORDERING INFO

SERIES	LETTER COLOR	HOUSING COLOR	OPTIONS	VOLTAGE
EXIT/REMOTE	R Red G Green	WHT Industry-standard white BLK Black	HTR Internal heater SALIDA Salida faceplate PC2 Polycarbonate shield <sup>[1]</sup> WG Wireguard <sup>[2]</sup>	D 120V or 277V

### REMOTE HEADS: RHL - T - WHT - OPTIONS - MV <sup>[3]</sup>

SERIES	HOUSING	HOUSING COLOR	OPTIONS	VOLTAGE
RHL	Single remote head	T Thermoplastic <sup>[4]</sup>	WHT Industry-standard white <sup>[7]</sup>	HL 1.5-watt remote head, 12 LEDs
DRHL	Dual remote head	D Die-cast <sup>[5]</sup>	BLK Black	MV Multi-voltage <sup>[9]</sup>
WETRHL	Wet location single remote head	P Polycarbonate <sup>[6]</sup>	GRAY Gray <sup>[8]</sup>	
WETDRHL	Wet location dual remote head			

## SPECIFICATIONS

- HOUSING** – Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic.
- ELECTRICAL** – Universal voltage, 120 or 277 VAC operation.
- MOUNTING** – Mounting canopy for top or end installation. Universal knockout pattern on back plate for wall mount.
- LISTINGS** –
  - Listed to UL 924 standard as an exit light suitable for dry or damp locations (20°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- WARRANTY** – 5-year limited warranty.

## NOTES

- <sup>1</sup> Ships separately. See page 2 for POLYCARBONATE SHIELD DETAILS.
- <sup>2</sup> Ships separately. See page 2 for WIREGUARD DETAILS.
- <sup>3</sup> Optional. Ships separately. See page 2 for REMOTE HEAD DETAILS.
- <sup>4</sup> RHL and DRHL only.

- <sup>5</sup> WETRHL and WETDRHL only.
- <sup>6</sup> WETRHL and WETDRHL only.
- <sup>7</sup> RHL and DRHL only.
- <sup>8</sup> WETRHL and WETDRHL only.
- <sup>9</sup> For use with 3.6V, 6V, 9.6V, or 12V batteries.


# EXIT/REMOTE LED Exit Sign with Remote

## ELECTRICAL INFORMATION

	INPUT WATTS (W)	INPUT AMPS (A)
120V	10	0.10
277V	10	0.05

## MOUNTING DETAILS

### WALL MOUNT BOLT CIRCLE PATTERN

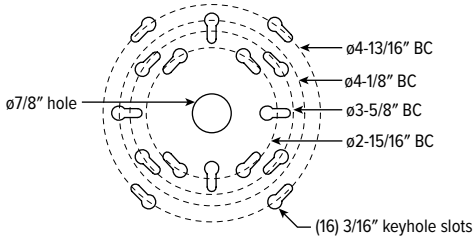

## REMOTE HEAD DETAILS

RHL



DIMENSIONS: 4-1/2" x 5-7/8" x 4-7/8"

DRHL



DIMENSIONS: 4-1/2" x 8-1/2" x 5"

WETRHL



DIMENSIONS: 4-1/4" x 6-5/8"

WETDRHL



DIMENSIONS: 10-3/8" x 6-3/4"

## POLYCARBONATE SHIELD DETAILS


PC2



DIMENSIONS: 15" x 22" x 7-3/4"

## WIREGUARD DETAILS

WG



DIMENSIONS: 13-3/4" x 15-1/4" x 6"