

CATALOG #: _____

Type: _____

PROJECT: _____

FEATURES

- Specification-grade, low-profile thin design
- Available as full-time AC powered unit or emergency unit with battery backup
- EM unit provides 90 minutes of emergency operation
- Ultra-bright, energy-efficient, long-life LEDs in red or green
- Fully automatic solid-state two rate charger on EM units recharges battery in 24 hours
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- Unique design allows double face conversion in the field
- Removable directional indicators

ORDERING EXAMPLE: EXIT/THIN - R - WHT - AC - OPTIONS - D

ORDERING INFO

SERIES	LETTER COLOR	HOUSING COLOR	POWER OPTIONS
EXIT/THIN	R Red G Green	BLK Black WHT Industry-standard white	AC AC operation EM AC operation with emergency battery backup

OPTIONS	VOLTAGE
PC1 Polycarbonate shield ^[1]	D 120V/227V
WG Wireguard ^[2]	

SPECIFICATIONS

- HOUSING – Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic.
- ELECTRICAL – Dual 120/277 voltage standard. 1.2V long life, maintenance-free, rechargeable NiCd battery when specified with EM power option.
- MOUNTING – Mounting canopy for top or end mount. Universal knockout pattern on back plate for wall mount.
- LISTINGS –
 - UL 924 standard as an exit light suitable for dry or damp locations (0°C - +50°C).
 - Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
 - Certified to CEC under Title 20 Regulations.
- WARRANTY – 5-year limited warranty.

NOTES


- ¹ Ships separately. See page 2 for OPTIONS DETAILS.
- ² Ships separately. See page 2 for OPTIONS DETAILS.

EXIT/THIN LED Thin Exit Sign

FIXTURE DETAILS


WALL MOUNT BOLT CIRCLE PATTERN

Not to scale.

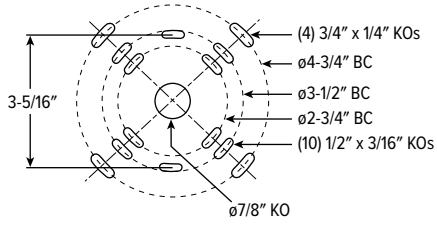

MOUNTING CANOPY BOLT CIRCLE PATTERN

Not to scale.



ELECTRICAL INFORMATION

INPUT WATTS (W)		INPUT AMPS (A)	
120V	277V	120V	277V
1.0	1.0	0.10	0.10

OPTIONS DETAILS

Ships separately.

PC1



DIMENSIONS: 13-3/16" x 9-3/16" x 2-1/2"

WG



DIMENSIONS: 13-3/4" X 15-1/4" X 6"