


EXIT/WET/CP LED Compact Wet Location Exit Sign

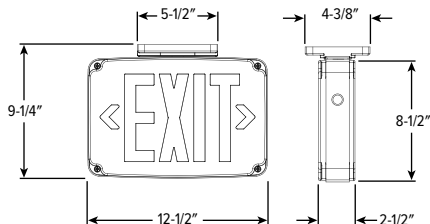

CATALOG #: _____

Type: _____

PROJECT: _____

FEATURES

- Vandal resistant design helps discourage unauthorized access to the unit
- Ideal for schools, hallways, stairwells, dormitories, locker rooms, or vandal prone area
- Unique dual color LED indicator light provides battery condition alert on emergency units
- Ultra-bright, energy efficient, long-life LEDs available in red or green
- Wet location listed
- 4.8V long-life, maintenance-free NiCd battery on emergency (EM) units provides 90 minutes of emergency operation
- Available as full-time AC powered unit or emergency unit with battery backup
- Fully automatic solid-state system on EM units recharges battery in 24 hours
- Corrosion-resistant enclosure with engineering grade silicone gasket
- Removable directional indicators
- Custom messages available, consult factory for details

ORDERING EXAMPLE: EXIT/WET/CP - SF - R - WHT - AC - OPTIONS - D

ORDERING INFO

SERIES	NUMBER OF FACES	LETTER COLOR	HOUSING COLOR	POWER OPTIONS
EXIT/WET/CP	SF Single face DF Double face	R Red G Green	BLK Black GRAY Gray with white faceplate WHT Industry-standard white	AC AC operation EM AC operation with emergency battery backup

OPTIONS	VOLTAGE
COPY/SF Custom message, single face ^[1]	D 120V or 277V
COPY/DF Custom message, double face ^[2]	
DC Dual circuit ^[3]	
SDT Self-diagnostic test ^[4]	
TP Tamper-resistant	
SALIDA Salida faceplate, contact factory for options	
PC2 Polycarbonate shield ^[5]	
WG Wireguard ^[6]	

SPECIFICATIONS

- Housing – 5VA flame retardant, UV-stabilized polycarbonate. High-impact resistant, UV-stabilized polycarbonate clear lens.
- Electrical – Universal voltage, 120 or 277 VAC operation.
- Mounting – Surface or wall mount. Polycarbonate mounting canopy for top or end mount.
- Labels – Listed to UL 924 standard as an exit light suitable for wet locations (-20°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- WARRANTY – 5-year limited warranty, see hew.com/warranty.

NOTES

- ¹ Consult factory.
- ² Consult factory.
- ³ AC only.
- ⁴ EM only.
- ⁵ Shipped separately. See page XX for POLYCARBONATE SHIELD DETAILS.
- ⁶ Shipped separately. See page 2 for WIREGUARD DETAILS.



EXIT/WET/CP^{LED} Compact Wet Location Exit Sign

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EXIT/WET/CP	2.7	2.7	0.025	0.011
EXIT/WET/CP-EM-SDT	3.3	3.4	0.030	0.014
EXIT/WET/CP-DC	2.4	2.4	0.023	0.011

POLYCARBONATE SHIELD DETAILS


PC2



DIMENSIONS: 15" x 22" x 7-3/4"

WIREGUARD DETAILS

WG



DIMENSIONS: 13-3/4" x 15-1/4" x 6"

