


# EXIT/WET/CP LED Compact Wet Location Exit Sign

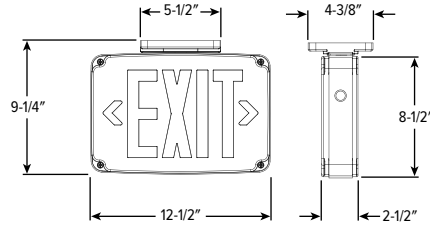

CATALOG #: \_\_\_\_\_

Type: \_\_\_\_\_

PROJECT: \_\_\_\_\_

## FEATURES

- Optional tamper-resistant hardware helps discourage unauthorized access to the unit
- Ideal for schools, hallways, stairwells, dormitories, locker rooms, or vandal prone areas when specified with TP option
- Unique dual color LED indicator light provides battery condition alert on emergency units
- Ultra-bright, energy efficient, long-life LEDs available in red or green
- Wet location listed
- EM unit provides 90 minutes of emergency operation
- Available as full-time AC powered unit or emergency unit with battery backup
- Fully automatic solid-state system on EM units recharges battery in 24 hours
- Corrosion-resistant enclosure with engineering grade silicone gasket
- Removable directional indicators
- Custom messages available, consult factory for details
- Self-diagnostic option performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes

ORDERING EXAMPLE: EXIT/WET/CP - SF - R - WHT - AC - OPTIONS - D

## ORDERING INFO

SERIES	NUMBER OF FACES	LETTER COLOR	HOUSING COLOR	POWER OPTIONS
EXIT/WET/CP	SF Single face DF Double face	R Red G Green	BLK Black GRAY Gray with white faceplate WHT Industry-standard white	AC AC operation EM AC operation with emergency battery backup

OPTIONS	VOLTAGE
COPY/SF Custom message, single face <sup>[1]</sup>	D 120V/277V
COPY/DF Custom message, double face <sup>[2]</sup>	120 120V
DC Dual circuit <sup>[3]</sup>	277 277V
SDT Self-diagnostic test <sup>[4]</sup>	
TP Tamper-resistant hardware	
SALIDA Salida faceplate <sup>[5]</sup>	
PC2 Polycarbonate shield <sup>[6]</sup>	
WG Wireguard, white <sup>[7]</sup>	

## SPECIFICATIONS

- HOUSING – 5VA flame retardant, UV-stabilized polycarbonate. High-impact resistant, UV-stabilized polycarbonate clear lens.
- ELECTRICAL – Dual 120/277 voltage standard. 4.8V long life, maintenance-free, rechargeable NiCd battery when specified with EM power option.
- MOUNTING – Surface or wall mount. Polycarbonate mounting canopy for top or end mount. Universal knockout pattern on back plate for wall mount.
- LISTINGS –
  - UL 924 standard as an exit light suitable for wet locations (-20°C - +50°C).
  - Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
  - Certified to CEC under Title 20 Regulations.
- WARRANTY – 5-year limited warranty.

## NOTES

- Consult factory.
- Consult factory.
- AC only. Must specify 120V or 277V.
- EM only.
- Contact factory for options.

- Wall mount only. Ships separately. See page 2 for OPTIONS DETAILS.
- Wall mount only. Ships separately. See page 2 for OPTIONS DETAILS.

# EXIT/WET/CP<sup>LED</sup> Compact Wet Location Exit Sign

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EXIT/WET/CP	2.7	2.7	0.025	0.011
EXIT/WET/CP-EM-SDT	3.3	3.4	0.030	0.014
EXIT/WET/CP-DC	2.4	2.4	0.023	0.011

## OPTIONS DETAILS


Wall mount only. Ships separately.

### PC2



DIMENSIONS: 15" x 22" x 7-3/4"

### WG



DIMENSIONS: 13-3/4" x 15-1/4" x 6"