

LED EXIT SIGN

EXIT

CATALOG #: _____ TYPE: _____

PROJECT: _____

NOTES: _____


LED



EXAMPLE → **EXIT - R - EM - WHT - OPTIONS - D**

SERIES LETTER COLOR POWER OPTIONS HOUSING COLOR OPTIONS/ACCESSORIES VOLTAGE

CROSS SECTIONS

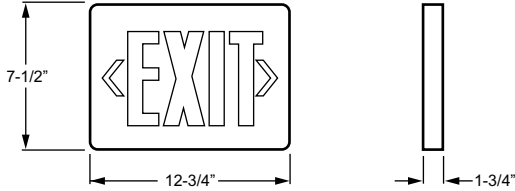

ORDERING INFORMATION

SERIES
EXIT LED Exit Sign

LETTER COLOR (Must specify)
R Red
G Green

POWER OPTIONS (Must specify)
AC AC operation
EM AC operation with emergency battery backup

HOUSING COLOR (Must specify)
WHT Industry-standard white
BLK Black

OPTIONS
COPY/SF Custom message (consult factory), single face
COPY/DF Custom message (consult factory), double face
SALIDA Salida faceplate (industry-standard white only)
DC Dual circuit (AC only)
SDT Self-diagnostic test (EM only)

ACCESSORIES (Shipped separately)
 See back for details.
PC1 Polycarbonate shield
WG Wireguard

VOLTAGE
D 120V or 277V
SV__ Special voltage, consult factory for options

FEATURES

- ▶ Compact, low-profile design
- ▶ Ultra-bright, energy efficient, long-life LEDs available in red or green.
- ▶ Available as full-time AC powered unit or emergency unit with battery backup.
- ▶ Fully automatic solid-state system on EM units recharges battery in 24 hours.
- ▶ 4.8V long-life, maintenance-free NiCd battery on emergency (EM) units provides 90 minutes of emergency operation.
- ▶ Charge rate/power on LED indicator and built-in test switch on emergency units.
- ▶ Provided as universal single face/double face unit.
- ▶ Removable directional indicators.
- ▶ Custom messages available, consult factory for details.

LED

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EXIT	3.8	3.8	0.034	0.020

SPECIFICATIONS

Housing – Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic.

Electrical – Universal voltage, 120 or 277 VAC operation.

Mounting – Universal mounting canopy for top or side installation.

Labels – Listed to UL 924 standard as an exit light suitable for dry or damp locations (0°C - 50°C). Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty – 5-year limited warranty

ACCESSORIES

PC1	WG
