




CATALOG #:

TYPE:

PROJECT:

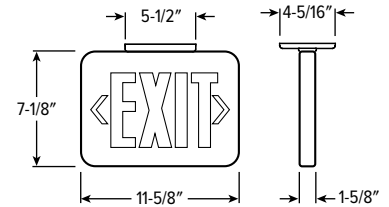

FEATURES

- Selectable red or green LEDs on-site with a built-in switch
- Compact, low-profile design
- Available as full-time AC powered unit or emergency unit with battery backup
- EM unit provides 90 minutes of emergency operation
- Ultra-bright, energy-efficient, long-life LEDs
- Fully automatic solid-state two rate charger on EM units recharges battery in 24 hours
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- Unique design allows double face conversion in the field
- Removable directional indicators

ORDERING INFO

CATALOG NUMBER	LETTER COLOR	POWER	HOUSING COLOR	VOLTAGE	UPC CODE
EXIT-RG-EM-WHT-QS-D	Selectable red or green	AC operation with emergency battery backup	Industry-standard white	120V/277V	850047638748

SPECIFICATIONS

- HOUSING – Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- ELECTRICAL – Dual 120/277 voltage standard. 1.2V long life, maintenance-free, rechargeable NiCd battery when specified with EM power option.
- MOUNTING – Mounting canopy for top or end mount. Universal knockout pattern on back plate for wall mount.
- LISTINGS –
 - UL924 standard as an exit light suitable for dry or damp locations (0°C to 50°C).
 - Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
 - Certified to CEC under Title 20 Regulations.
- WARRANTY – 5-year limited warranty

ELECTRICAL INFORMATION

	INPUT WATTS (W)	INPUT AMPS (A)
120V	1.0	0.1
277V	1.0	0.1