




CATALOG #:

TYPE:

PROJECT:



## FEATURES

- Ready to ship in 48 hours with on-hand inventory to support immediate job requirements
- Easily change the color temperature and lumen output on-site with built-in switches, providing ultimate flexibility
- Easy to install and service with long-lasting performance
- End plate converts to row aligner for continuous row
- Small fixture profile allows inconspicuous placement in coves or confined spaces
- Diffuse acrylic lens enhances uniformity and minimizes glare
- High-performance up to 152 lm/W
- Quick-wire knockouts in back of fixture housing for easy attachment of incoming power supply
- All parts painted after fabrication to provide safe installation without gloves
- Made Right Here® in the USA

## ORDERING INFO

CATALOG NUMBER	LENGTH	SELECTABLE LUMENS	CRI	SELECTABLE CCT	DRIVER	VOLTAGE	UPC CODE
FS-4-LS/8CS-QS-DIM-UNV	44-11/16"	3,400/4,800/6,100	80	3,500K/4,000K/5,000K	Dim-to-off driver <sup>[1]</sup>	120-277V	850047638472

ACCESSORY CATALOG NUMBER	DESCRIPTION	UPC CODE
EM/10W KIT-NC-QS	10-watt emergency battery kit, no conduit <sup>[2]</sup>	850047638670

## SPECIFICATIONS

- HOUSING – 22-gauge die-formed C.R.S.
- SHIELDING – Diffuse acrylic lens.
- FINISH – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL – High-quality mid-power LED board. L70 > 70,000 hours per IES TM-21. 35°C maximum ambient operating temperature. 50/60 Hz constant current driver.
- MOUNTING – Surface (ceiling or wall) or suspended (hanging hardware required).
- PACKAGING – One fixture per box, 224 per pallet.

### LISTINGS –

- cETLus conforms to UL STD 1598. Certified to CAN/CSA STD C22.2 No. 250.0. Suitable for dry locations
- DesignLights Consortium qualified product. Not all versions of this product may be DLC qualified, see the DLC Qualified Products List at [designlights.org/QPL](http://designlights.org/QPL)
- Build America, Buy America (BABA) and Buy American Act (BAA) compliant. Request certification at [hew.com/buy-american](http://hew.com/buy-american)
- WARRANTY – 5-year limited warranty, see [hew.com/warranty](http://hew.com/warranty)

## NOTES

- Prewired for 0-10V low-voltage applications. Dimming down to 5%, dim-to-off below 0.5V
- Ships separately, field installed. CEC compliant. EM battery and test switch field installed in fixture.




## Fixture Performance Data

WATTAGE SETTING	3500K			4000K			5000K		
	LUMEN OUTPUT	WATTAGE	EFFICACY (lm/W)	LUMEN OUTPUT	WATTAGE	EFFICACY (lm/W)	LUMEN OUTPUT	WATTAGE	EFFICACY (lm/W)
Low	3398	23.3	146	3442	22.7	152	3401	23.2	147
Medium	4677	32.4	144	4791	31.5	152	4688	32.3	145
High	5909	41.9	141	6105	40.5	151	5922	41.8	142


- Photometrics tested in accordance with IESNA LM-79. Results based on 80 CRI/4000K CCT, average wattage for 120V input, and 25°C ambient temperature. Actual performance may vary +/- 5%.
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.

## DISTRIBUTION CURVE



## Dimensions


### BACK VIEW

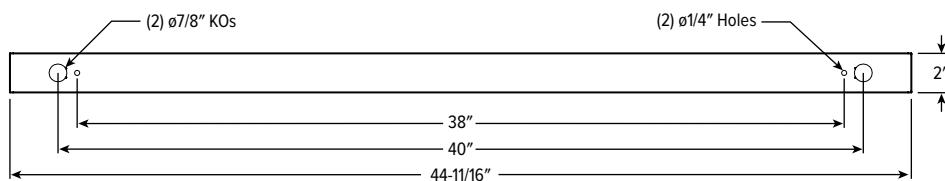

## FIELDSELECT SWITCHES



### SIDE VIEW



## ACCESSORY DETAILS

### EMERGENCY BATTERY KIT

