




CATALOG #:

TYPE:

PROJECT:



FEATURES

- Ready to ship in 48 hours with on-hand inventory to support immediate job requirements
- Optimized for single-person installation and easy to service with long-lasting performance
- Ultra-low 2-9/16" fixture depth
- Up to 45°C ambient rating
- Micro-prismatic lens reduces glare
- Energy-saving alternative designed to replace traditional HID or fluorescent high bays
- High-performance up to 149 lm/W
- Quick-wire access plate in back of fixture housing for easy attachment of incoming power supply
- All parts painted after fabrication to provide safe installation without gloves
- Made Right Here® in the USA

ORDERING INFO

CATALOG NUMBER	LENGTH	LUMENS	CRI	CCT	SHIELDING	MOUNTING	DRIVER	VOLTAGE	UPC CODE
GS-2-L240/840-CA-(2)VBY/L-10/PWU-QS-DIM-UNV	2'	24,000lm	80	4000K	Clear acrylic lens	(2) Y-hangers with loop cable	Dimming driver, 0-10V	120-277V	850047638434
GS-2-L240/840-MD-(2)VBY/L-10/PWU-QS-DIM-UNV				4000K	Medium distribution, micro-prismatic acrylic lens				850047638489
GS-2-L240/850-CA-(2)VBY/L-10/PWU-QS-DIM-UNV				5000K	Clear acrylic lens				850047638861

SPECIFICATIONS

- HOUSING/REFLECTOR – Die-formed aluminum housing.
- SHIELDING – Clear or micro-prismatic acrylic lens.
- FINISH – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL – High-quality mid-power LED boards. L80 at 72,000 hours per IES TM-21. -40°C minimum to 45°C maximum ambient operating temperature standard. 50/60 Hz constant current driver.
- MOUNTING – Suspended. Indoor applications only. Fixture weight is 6.5lbs.
- PACKAGING – One fixture per box, 90 per pallet.
- LISTINGS –
 - cCSAus certified as luminaire suitable for dry or damp locations.
 - DesignLights Consortium qualified product. Not all versions of this product may be DLC qualified, see the DLC Qualified Products List at designlights.org/QPL
 - Build America, Buy America (BABA) and Buy American Act (BAA) compliant. Request certification at hew.com/buy-american
- WARRANTY – 5-year limited warranty, see hew.com/warranty



H.E. Williams, Inc.

Carthage, Missouri

www.hew.com

417-358-4065

Designed and Manufactured in the USA

REV.01/20/26.JL

Information contained herein is subject to change without notice.

High Bay

Page 1 of 2




Fixture Performance Data

Catalog Number	CCT	Delivered Lumens	Wattage	Efficacy (lm/W)
GS-2-L240/840-CA-(2)VBY/L-10/PWU-QS-DIM-UNV	4000K	24420	169	144
GS-2-L240/840-MD-(2)VBY/L-10/PWU-QS-DIM-UNV	4000K	23199	169	137
GS-2-L240/850-CA-(2)VBY/L-10/PWU-QS-DIM-UNV	5000K	25153	169	149


Photometrics tested in accordance with IESNA LM-79. Results based on 80 CRI/4000K CCT, wattage for 120V input, and 25°C ambient temperature. Actual performance may vary +/- 5%.

Distribution Curves

CA Shielding




MD Shielding




Fixture Details

Back View

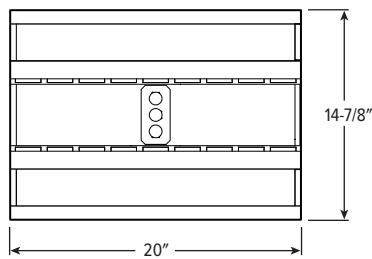

Power Entry

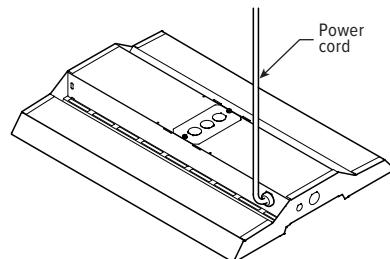

Y-Hangers

