

CATALOG #: _____

Type: _____

PROJECT: _____

FEATURES

- Extruded or spun pole shaft with cast aluminum structural base provides durability and resists corrosion
- Choice of straight or tapered 16-flat fluted aluminum round shafts
- Designed to accommodate up to two fixtures on a pole top assembly with a maximum 36" O.C. fixture span
- 8' to 18' height options
- An assortment of finishes are available to complement the architectural elements of any outdoor space
- Access door provides easy on-site maintenance

SPECIFICATIONS

- SHAFT** – 16-Flat fluted round pattern surface pole spun or extruded from 6000 series aluminum alloy.
- POLE TOP** – Plate and tenon provided for top mount luminaire.
- ACCESS DOOR** – Located on structural base. Grounding provision provided.
- FINISH** – Polyester powder coat bonded to pretreated metal, meets AAMA 2604 specifications for outdoor durability.
- ANCHOR BOLTS** – Conform to ASTM F1554 Grade 55, galvanized a minimum of 12" on the threaded end.
- MOUNTING** – Structural base cast from 356 aluminum alloy. The pole is inserted and welded into the structural base casting. The completed assembly is heat-treated to a T6 temper. A mounting template is provided with each pole and anchor bolt order.

ORDERING EXAMPLE: HWNF - A - 080 - 40 - 40 - 125 - S - TM238 - DBR - AB - OPTIONS

SERIES	MATERIAL	HEIGHT	TOP DIAMETER	SHAFT BASE DIAMETER ⁽¹⁾	WALL THICKNESS
HWNF	A Aluminum	Additional limitations may apply. Specify according to chart. See page 3 for LOAD AND DIMENSIONAL DATA.			
		080 8'-0"	40 4" Straight fluted	40 4" ⁽³⁾	125 0.125"
		100 10'-0"	50 5" Straight fluted	50 5"	188 0.188" ⁽⁴⁾
		120 12'-0"	60 6" Straight fluted	60 6"	
		140 14'-0"	TF Tapered fluted ⁽²⁾		
		160 16'-0"			
		180 18'-0"			

SHAPE OF SHAFT ⁽⁵⁾	FIXTURE MOUNTING ⁽⁶⁾	FINISH ⁽⁷⁾	ANCHOR BOLTS
S Straight round	POLE TOP MOUNT	BLK Black ⁽⁹⁾	AB Anchor bolts ⁽¹³⁾
T Tapered round	TM238 2-3/8" x 4" Round tenon	DBR Medium bronze	LAB Less anchor bolts
	TM278 2-7/8" x 4" Round tenon	DBZ Dark bronze	PAB Pre-shipped
	TM3 3" x 4" Round tenon	GRAY Standard gray	Anchor Bolts ⁽¹⁴⁾
	TC_____ Custom Round Tenon ⁽⁸⁾	GRN Green ⁽¹⁰⁾	
		SLV Satin aluminum ⁽¹¹⁾	
		WHT White ⁽¹²⁾	
		RAL#_____ Specify custom color	

OPTIONS

FS Festoon box only ⁽¹⁵⁾

NOTES


- Top diameter of the decorative base casting.
- Top diameter varies.
- Straight round shaft only.
- 160 and 180 straight round shaft heights only.
- See page 2 for FIXTURE DETAILS.
- Designed for pole top tenon mount. See page 2 for MOUNTING DETAILS.
- See page 3 for FINISH OPTIONS.
- Must specify tenon diameter and height, consult factory.
- RAL #9004.

- RAL #6005.
- RAL #9006.
- RAL #9003.
- Four L-bolts provided with two hex nuts and two flat washers each, shipped with pole.
- Four L-bolts provided with two hex nuts and two flat washers each.
- Casting only. Outlet, cover and hardware by others.

FIXTURE DETAILS


SHAPE OF SHAFT

Straight Round
 Tapered Round
 16-Flat Fluted Round

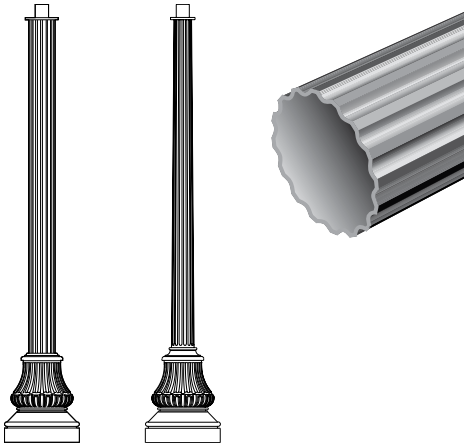


MOUNTING DETAILS

POLE TOP MOUNT TYPICAL TENON




ANCHORAGE DATA

BOLT PROJECTION

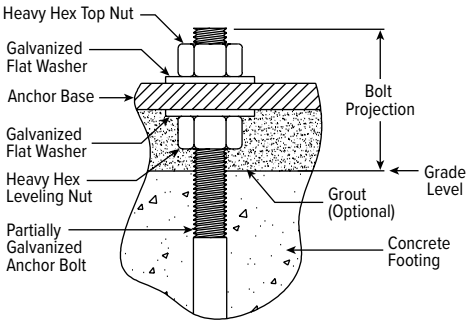


ANCHOR BASE

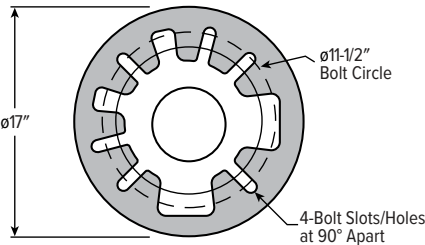

ANCHOR BOLTS			ANCHOR BASE			
BOLT SIZE	PROJECTION	±	BOLT CIRCLE		DIA.	THK.
			DIA.	±		
3/4" x 17" x 3"	3-3/8"	1/4"	12"	1"	17"	3/4"







OPTION DETAILS

ALUMINUM FESTOON BOX



NOTE: The festoon box is located above the access door at 0°.

FINISH OPTIONS

WHITE	BLACK	GREEN	MEDIUM BRONZE	DARK BRONZE	SATIN ALUMINUM GRAY	For custom color, please specify RAL code or a manufacturer code with description. All custom colors other than RAL require four sample swatches, minimum 1" square.
						

LOAD AND DIMENSIONAL DATA

STRAIGHT FLUTED ROUND

POLE HT. (FT)	CATALOG NUMBER	SHAFT				80 MPH ^{1,2}		90 MPH ^{1,2}		100 MPH ^{1,2}	
		TOP O.D. (IN)	BASE O.D. (IN)	WALL THK. (IN)	STRUC. WT ³ (LBS)	MAX LUMINAIRE EPA (SQ FT)	MAX LUMINAIRE WEIGHT (LBS)	MAX LUMINAIRE EPA (SQ FT)	MAX LUMINAIRE WEIGHT (LBS)	MAX LUMINAIRE EPA (SQ FT)	MAX LUMINAIRE WEIGHT (LBS)
8	HWNF-A-080-40-40-125-S	4	4	0.125	55	10.6	300	8.1	300	6.4	300
	HWNF-A-080-50-50-125-S	5	5	0.125	66	17.7	300	13.7	300	10.8	300
10	HWNF-A-100-40-40-125-S	4	4	0.125	58	7.9	300	5.9	300	4.5	300
	HWNF-A-100-50-50-125-S	5	5	0.125	63	13.6	300	10.4	300	8.0	300
12	HWNF-A-120-40-40-125-S	4	4	0.125	63	5.7	300	4.1	300	2.9	300
	HWNF-A-120-50-50-125-S	5	5	0.125	66	10.6	300	7.8	300	5.8	300
	HWNF-A-120-60-60-125-S	6	6	0.125	72	16.4	300	12.3	300	9.4	300
14	HWNF-A-140-50-50-125-S	5	5	0.125	75	7.8	300	5.5	300	3.9	300
	HWNF-A-140-60-60-125-S	6	6	0.125	76	12.7	300	9.2	300	6.8	300
16	HWNF-A-160-50-50-125-S	5	5	0.125	75	5.6	300	3.7	300	2.3	300
	HWNF-A-160-60-60-125-S	6	6	0.125	83	9.6	300	6.7	300	4.6	300
	HWNF-A-160-50-50-188-S	5	5	0.188	102	10.1	300	7.3	300	5.2	300
18	HWNF-A-180-50-50-125-S	5	5	0.125	91	3.7	300	2.1	300	0.9	300
	HWNF-A-180-60-60-125-S	6	6	0.125	98	7.1	300	4.6	300	2.8	300
	HWNF-A-180-60-60-188-S	6	6	0.188	120	8.3	300	5.6	300	3.6	300

TAPERED FLUTED ROUND

POLE HT. (FT)	CATALOG NUMBER	SHAFT				80 MPH ^{1,2}		90 MPH ^{1,2}		100 MPH ^{1,2}	
		TOP O.D. (IN)	BASE O.D. (IN)	WALL THK. (IN)	STRUC. WT ³ (LBS)	MAX LUMINAIRE EPA (SQ FT)	MAX LUMINAIRE WEIGHT (LBS)	MAX LUMINAIRE EPA (SQ FT)	MAX LUMINAIRE WEIGHT (LBS)	MAX LUMINAIRE EPA (SQ FT)	MAX LUMINAIRE WEIGHT (LBS)
8	HWNF-A-080-TF-50-125-T	4.1	5	0.125	57	17.7	300	13.7	300	10.9	300
10	HWNF-A-100-TF-50-125-T	3.8	5	0.125	60	13.8	300	10.5	300	8.2	300
12	HWNF-A-120-TF-60-125-T	4.5	6	0.125	68	16.8	300	12.7	300	9.8	300
14	HWNF-A-140-TF-60-125-T	4.2	6	0.125	72	13.2	300	9.8	300	7.4	300
16	HWNF-A-160-TF-60-125-T	3.9	6	0.125	75	10.3	300	7.5	300	5.4	300
18	HWNF-A-180-TF-60-125-T	3.7	6	0.125	79	8.0	300	5.6	300	3.8	300

¹ Effective Projected Area (EPA) calculations allow for 1.3 Wind Gust Factor. Maximum EPA and weight values are based on top mounted luminaires or arm assembly having a centroid 2'-6" above and 1'-6" eccentric to the pole top at Nominal Mounting Height. Variations from sizes above are available upon inquiry. Satisfactory performance of poles is dependent upon the pole being properly attached to a supporting foundation of adequate design.

² See page 4 for WIND MAP.

³ Structure Weight is a nominal value which includes the pole shaft and structural base.

▪ Pole installations in various parts of the country perform satisfactorily; however, in select locations destructive vibration can occur. H.E. Williams, Inc. is not responsible for vibration induced fatigue damage.


▪ H.E. Williams, Inc. warrants this product to be free from defects in materials and workmanship. Any defective part returned within one year from the date of delivery of the goods will be repaired or replaced without charge, F.O.B. factory.

▪ This warranty specifically excludes fatigue or similar phenomena resulting from induced vibration, harmonic oscillation or resonance associated with movement of air currents around the product.

▪ The above warranties are given in lieu of all other warranties express or implied, including without limitation, the warranty of merchantability and the warranty of suitability for a particular purpose. It is expressly stated that H.E. Williams, Inc. assumes no liability for consequential or liquidated damages arising out of a breach of the sale, including any warranties arising therefrom, and buyer's remedy shall be limited to repair or replacement of defective parts as described above.

▪ Any action for the breach under a sale including any warranties arising therefrom must be commenced within one year after the cause of action accrues.

WIND MAP

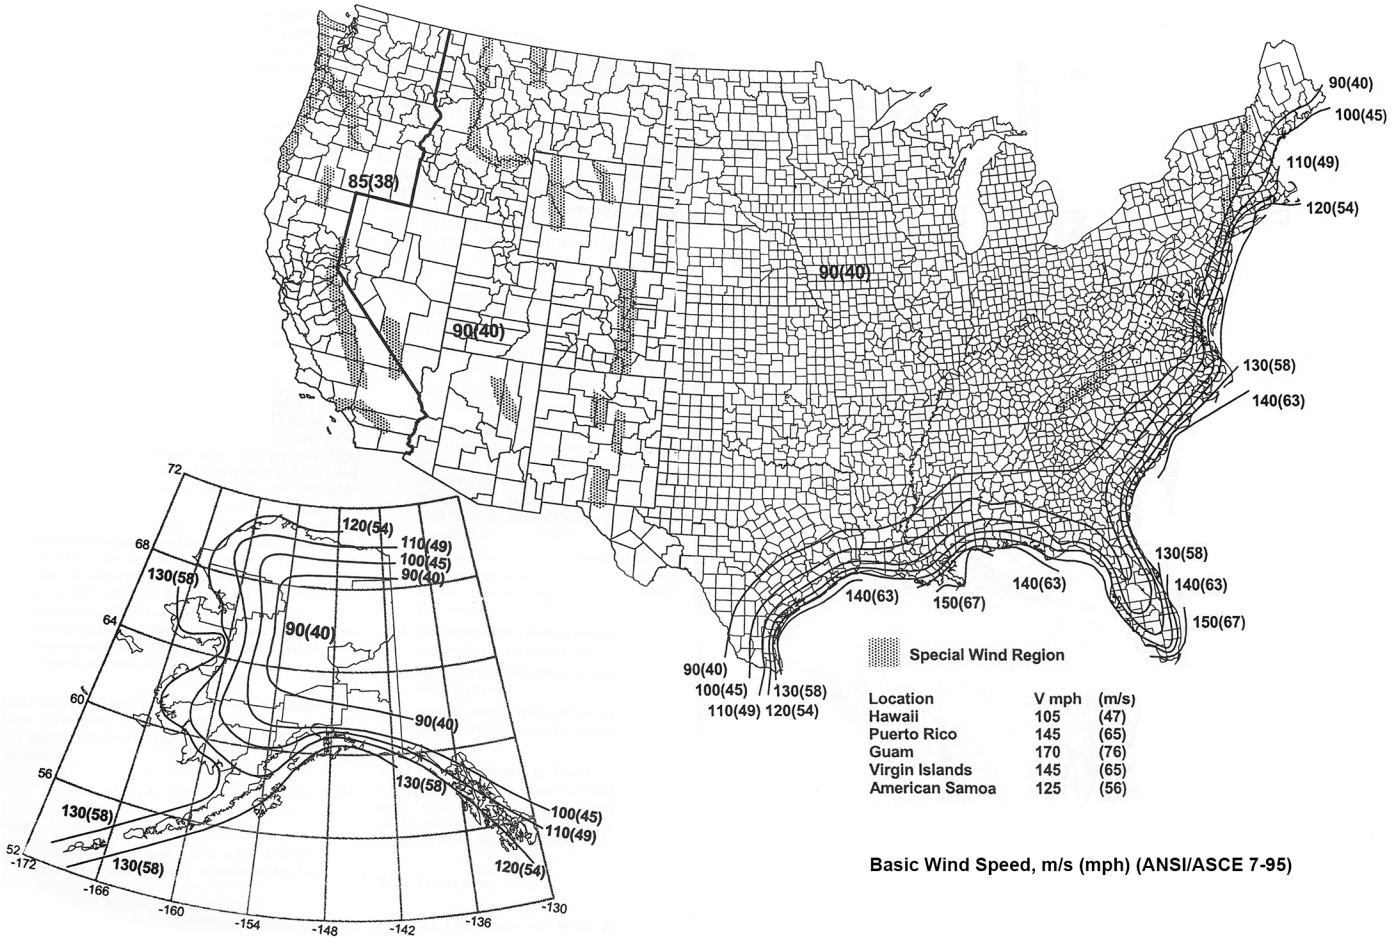

The Effective Projected Area (EPA) standards shown in the Load and Dimensional Data Tables on the specification sheets are designed to withstand dead loads and theoretical dynamic loads developed by variable wind speeds, as charted, with an appropriate wind gust factor under the following conditions:

- Values are nominal design 3-second gust wind speeds in miles per hour (m/s) at 33 ft (10 m) above ground for Exposure C category.

- Linear Interpolation between wind contours is permitted.
- Islands and coastal areas outside the last contour shall use the last wind speed contour of the coastal area.
- Mountainous terrain, gorges, ocean promontories, and special wind regions shall be examined for unusual wind conditions.
- This map is intended as a general guide. Check you local area for unique wind conditions.

From Standard Specifications for Structural Support for Highway Signs, Luminaires, and Traffic Signals, Copyright 2009, by the American Association of State Highway and Transportation Officials, Washington D.C. Used by permission. Documents may be purchased from the AASHTO bookstore at 1-800-231-3475 or online at bookstore.transportation.org