

CATALOG #: _____

TYPE: _____

PROJECT: _____



FEATURES

- Slim, low-profile suspended or surface mount fixture provides an architectural alternative to standard wrap-around fixtures
- Round or square profile provides design choices for a variety of applications
- Quality, frosted, extruded acrylic lens snaps securely in place to provide gentle diffused illumination
- Slim end plates are designed to conform to lens shape and prevent unsightly light leaks
- Internal, self-aligning joining method ensures straight rows
- Wireless in-fixture control solutions available
- Made Right Here® in the USA

SPECIFICATIONS

- HOUSING – 20-gauge die-formed C.R.S.
- SHIELDING – Frosted, matte acrylic, round or square profile.
- FINISH – Textured matte white polyester TGIC powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL – High-quality mid-power LED boards. L80 >72,000 hours per IES TM-21. 50/60 Hz constant current driver.
- MOUNTING – Surface (ceiling or wall) or suspended (hanging hardware required)
- LISTINGS –
 - cCSAus certified as luminaire suitable for dry or damp locations.
 - UL 924 available, see Options.
 - Build America, Buy America (BABA) and Buy American Act (BAA) compliant. Request certification at hew.com/buy-american
- WARRANTY – 5-year limited warranty, see hew.com/warranty

ORDERING EXAMPLE: LLM - 4 - L6/835 - S - SQ - ACF/D48 - OPTIONS - CONTROL/DIM - UNV

SERIES	NOMINAL LENGTH ^[1]	LUMENS ^[2]	CRI	CCT	MOUNTING TYPE
LLM	Stand-alone: 2', 4', 6' & 8' nominal lengths, fixture ships assembled. Example: 4 = 4'	L6 600lm	8 80	27 2700K	S Surface
		L10 1,000lm	9 90	30 3000K	P Suspended
	Row-mount: Lengths specified in 24" increments Example: 12 = 12'	L15 1,500lm		35 3500K	
		L20 2,000lm		40 4000K	
		Product Builder			50 5000K
Simplify ordering & layout design with the Williams Linear Product Builder at hew.com/product-builder					

SHIELDING

RD Round frosted acrylic
SQ Square frosted acrylic

MOUNTING

AIRCRAFT CABLES (EXAMPLE: ACF/D48) ^[3]

Prefix	Type	Length
ACF/ Feeder	D 1" grid & hardpan	24 24"
ACJ/ Joiner	N 9/16" grid	48 48"
	S Slot grid	96 96"

OPTIONS

See page 2 for EMERGENCY BATTERY OPTIONS.

See page 4 for FINISH OPTIONS.

PS/120	Pull switch, single circuit ^[5]
WRS/120	White rocker switch ^[6]
45AMB (L___)	(2) 45° adjustable mounting brackets ^[7] Additional lower lumen packages available ^[8] Example: 800 lumens = LLM-4-L10/835-(L8)
GEN	Approved for UL 924 emergency generator circuit through-feed wiring ^[9]

CONTROL ^[4]

See page 6 for ADDITIONAL CONTROL OPTIONS.

–	None
AVI-LVFA	Avi-on wireless fixture control ^[10]
AVI-LVFA-CS2-PIR	Avi-on wireless fixture control with PIR motion and daylight sensor ^[11]
AWNRR	Lutron Athena wireless node integral fixture control, RF only ^[12]
AWNS	Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing ^[13]

DRIVER

See page 4 for ADDITIONAL DRIVER OPTIONS.

DIM	Driver with external 0-10V dimming wires
DRV	Driver without external dimming wires
DA	Driver with 12V auxiliary power, without external dimming wires ^[14]
DSR	Sensor-ready driver without external dimming wires (D4i DALI-2) ^[15]

VOLTAGE

120	120V
277	277V
UNV	120-277V
347	347V ^[16]

NOTES

- ¹ 8' length ships with (2) 4' lenses.
- ² Lumens per foot output based on 80 CRI/3500K CCT. Actual performance may vary +/-5%, see page 2 for FIXTURE PERFORMANCE DATA. Additional lumen packages available, see Options.
- ³ Must specify P Mounting Type only. See page 3 for MOUNTING DETAILS.
- ⁴ See page 5 for AVI-ON BLUETOOTH WIRELESS CONTROL DETAILS. See page 4 for SENSOR & NODE PLACEMENT DETAILS.
- ⁵ 120V only. S Mounting Type only.
- ⁶ 120V only. S Mounting Type only.
- ⁷ Surface mount only. Cord recommended, ships separately. See page 3 for MOUNTING DETAILS. Field-adjustable up and down in 7-1/2" increments.

- ⁸ (L5) lumen package minimum. Specify in increments of 100 nominal lumens. Option must be specified with next higher lumen package.
- ⁹ Maximum mounting height is 15.4' (4.7 m). Minimum lumen output is 400 lm/ft. See hew.com/UL924 for details.
- ¹⁰ DA Driver only.
- ¹¹ DA Driver only.
- ¹² DA and DSR Drivers only.
- ¹³ DA and DSR Drivers only.
- ¹⁴ Avi-on and Lutron Athena Controls only.
- ¹⁵ Lutron Athena Controls only.
- ¹⁶ Not available with EM batteries, DA, or DSR drivers.



FIXTURE PERFORMANCE DATA

	PER FOOT				
	DELIVERED LUMENS		EFFICACY (lm/W)		WATTAGE
	RD LENS	SQ LENS	RD LENS	SQ LENS	
L6	597	609	153	156	3.9
L10	990	1010	148	151	6.7
L15	1505	1536	145	148	10.4
L20	1986	2027	144	147	13.8


- Photometrics tested in accordance with IESNA LM-79. Results based on 80 CRI/3500K CCT, average wattage for 120V through 277V input, and 25°C ambient temperature. Actual performance may vary +/-5%.
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.
- Use multiplier table to calculate additional options.

MULTIPLIER TABLE

	COLOR TEMPERATURE	
	CCT	CONVERSION FACTOR
80 CRI	2700K	0.97
	3000K	0.99
	3500K	1.00
	4000K	1.03
	5000K	1.06
90 CRI	2700K	0.80
	3000K	0.82
	3500K	0.83
	4000K	0.86
	5000K	0.89

PHOTOMETRY

LLM-4-L10/835-S-SQ Total Luminaire Output: 3920 lumens; 24.7 Watts | Efficacy: 159 lm/W | 80 CRI; 3500K CCT

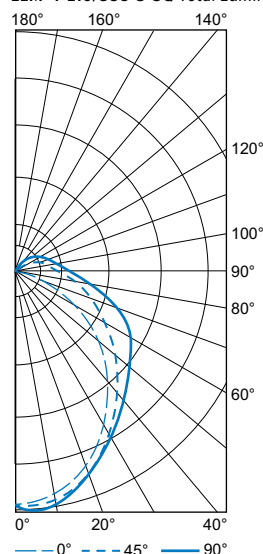

VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0	1196	1196	1196	
5	1201	1206	1209	114
15	1107	1126	1131	318
25	956	991	1005	457
35	772	838	884	520
45	553	676	779	520
55	363	538	683	479
65	219	428	584	413
75	105	314	443	319
85	31	229	330	224
90	5	173	250	
95	0	165	232	154
105	0	134	180	122
115	0	110	148	94
125	0	90	126	72
135	0	73	103	51
145	0	64	90	35
155	0	48	63	20
165	0	36	41	8
175	0	12	24	1
180	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	889	23
	0 - 40	1408	36
	0 - 60	2407	61
	0 - 90	3363	86
	90 - 180	557	14
	0 - 180	3920	100

EMERGENCY BATTERY OPTIONS


Specify CEC in the option code when California Energy Commission regulations are required.

CATALOG NUMBER	DESCRIPTION
EM/10WLP	Low profile 10-watt emergency battery ^[1]
EM/10WRM	Remote mount 10-watt emergency battery ^[2]
EM/10WRM/RTS	Remote mount 10-watt emergency battery with regressed test switch ^[2]
EM/12WRM	Remote mount 12-watt emergency battery ^{[2] [3]}

- Available in 4' and 8' lengths only. Not available with L20 lumen package.
- Large remote box provided.
- Not available when CEC regulations are required.

REMOTE MOUNT BATTERY DETAILS

EM/10WRM/RTS





Regressed test switch
ø1-3/4"

EM/10WRM | EM/12WRM




Standard test switch
2-3/4" x 4-1/2"

Max remote distance is 50' including suspension length, connection by others.

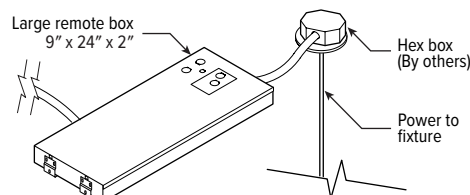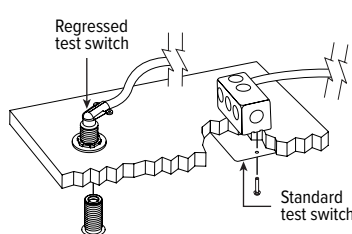


CROSS SECTIONS

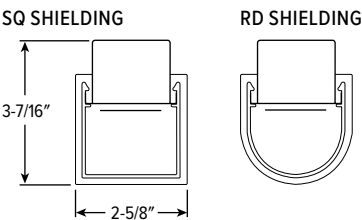


FIXTURE DETAILS

See hew.com/power-entry for power entry details.


BACKVIEW

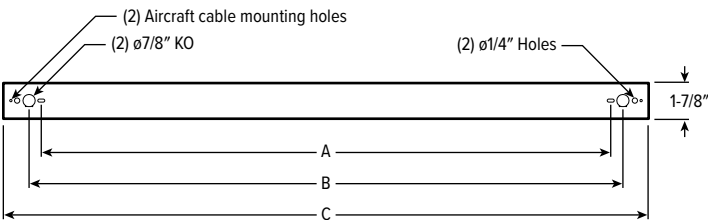

PS/120 OPTION




WRS/120 OPTION



	SURFACE MOUNT (A)	7/8" KOs (B)	ACTUAL LENGTH (C)
2'	19-1/16"	20-1/2"	24-1/4"
4'	41-3/16"	42-5/8"	46-3/8"
6'	63-7/8"	65-3/8"	69-1/16"
8'	87-5/16"	89-1/16"	92-13/16"


MOUNTING DETAILS

CENTER-TO-CENTER SUSPENDED MOUNTING CABLE



CABLE MOUNT		
	A	B
2'	22-1/4"	24-1/4"
4'	44-3/8"	46-3/8"
6'	67-1/16"	69-1/16"
8'	90-13/16"	92-3/4"


STANDARD HARDWARE FOR SUSPENDED PRODUCT (Grid and Hardpan)




Notes:

- Fixtures are provided with adjustable length aircraft cables and mounting hardware, must specify.
- Electrical supply is brought into the feeder fixture, either as part of a row or as a stand-alone unit. Joiner fixtures complete the row.
- The feeder kits are standard with a 5" canopy to cover the junction box and a 2" canopy at the non-feed point. No J-box is required at non-feed points.


ROW ALIGNER



45AMB

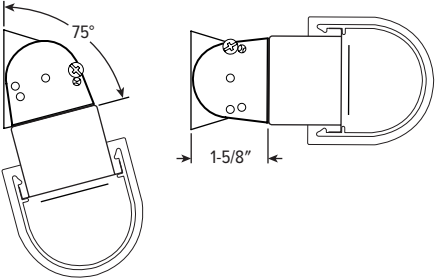


FINISH OPTIONS

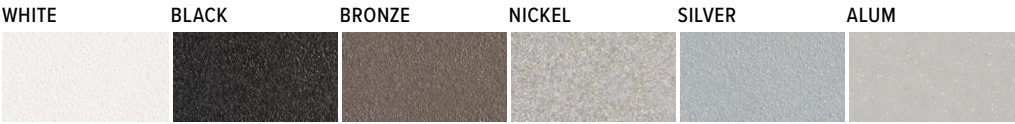

For custom color, please specify RAL code or a manufacturer code with description. All custom colors other than RAL require two sample swatches, minimum 1" square.

SENSOR & NODE PLACEMENT DETAILS

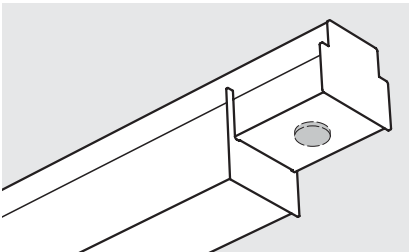

ADDITIONAL DRIVER OPTIONS

Note: Lumen restrictions apply, consult product builder at hew.com/product-builder

CATALOG NUMBER	DESCRIPTION
DRV	Driver without external dimming wires prewired for non-dimming applications
DIM	Driver with external dimming wires prewired for 0-10V low voltage applications
DIM1	1% driver with external dimming wires prewired for 0-10V low voltage applications
DIM LINE	Line voltage dimming driver (TRIAC and ELV compatible, 120V only)
DIM TRC	Line voltage dimming driver (TRIAC compatible, 120V only)
DA	Driver with 12V auxiliary power, without external dimming wires
DSR	Sensor-ready driver without external dimming wires (D4i DALI-2)
SD40	40% step-dimming driver
SD50	50% step-dimming driver
DALI	DALI dimming driver
LDE1	Lutron Hi-lume 1% EcoSystem dimming driver

SEE NEXT PAGE FOR CONTROL DETAILS



AVI-ON BLUETOOTH WIRELESS CONTROL DETAILS

FEATURES

Simple

- Gateway-free distributed control
- Contractor friendly installation
- Occupancy/vacancy/daylight sensing

Scalable

- Virtually unlimited network size
- Spans small offices to large warehouses
- Flexible control strategies

Secure

- Optional cloud connectivity
- UL IoT platinum security rating
- DLC 5.0 compliant

COMMISSIONING & INSTALLATION TOOLS

Avi-on mobile apps provide intuitive, quick installation and commissioning. Pro tools are available to qualified installers. Live commissioning training and on-site or remote support by Avi-on must be ordered separately through Avi-on.



Commissioning Mobile App




Zone Scanner Web App



Commissioning Pro App

SYSTEM COMPONENTS

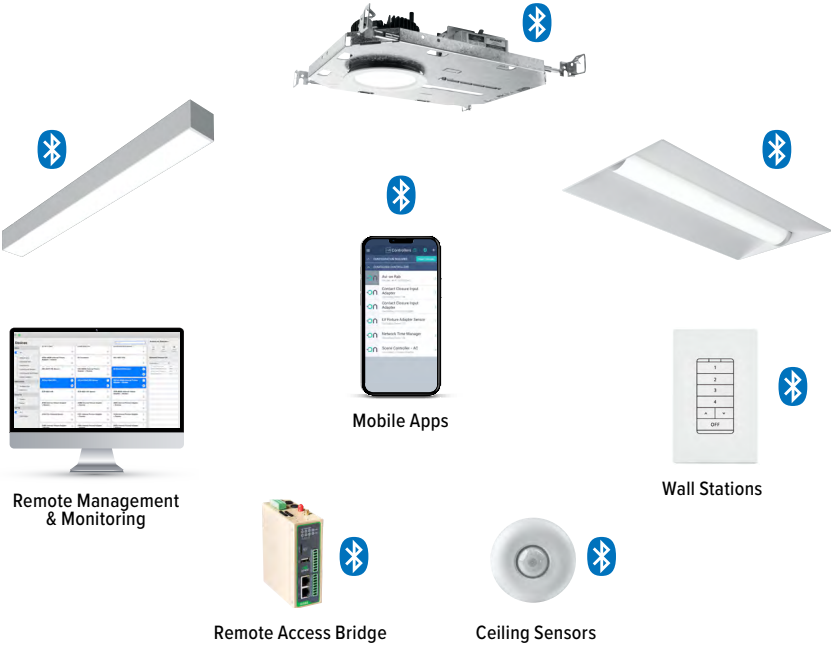

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Avi-on is under license. Other trademarks and trade names are those of their respective owners.


ACCESSORIES

WALL STATIONS	
AVI-B-2401AC-1	Scene controller - buttons numbered 1-4 and up/down/off, 120-277VAC
AVI-B-2402BAT-1	Scene controller - buttons numbered 1-4 and up/down/off, battery powered
AVI-B-2401AC-2	Dimmer with presets - buttons with percentages and up/down/off, 120-277VAC
AVI-B-2402BAT-2	Dimmer with presets - buttons with percentages and up/down/off, battery powered
AVI-B-2401AC-3	Two button control on/off or hold to dim up/down, 120-277VAC
AVI-B-2402BAT-3	Two button control on/off or hold to dim up/down, battery powered



NETWORK	
AVI-RAB-LTE	Remote access bridge
AVI-NTM	Network time manager with battery backup
CEILING MOUNT SENSORS	
AVI-KIT-SEN-DUCM	PIR motion and ultrasonic sensor kit
AVI-KIT-SEN-ICM	PIR motion and photocell sensor kit

For load controllers and additional accessory info, see hew.com/avi-on

AVI-LVFA-CS2-PIR Avi-on wireless fixture control with PIR motion and daylight sensor. DA Driver only.

SPECIFICATIONS	
TYPE	PIR Motion + Daylight
MOUNTING HEIGHT	8' – 10'
DETECTION ANGLE	360°
TEMPERATURE RANGE	-30° to 50°C
RELATIVE HUMIDITY	10 to 80% non-condensing
IP RATING	IP20
MANUFACTURER	Avi-On
	

SENSOR COVERAGE PATTERNS



SENSOR DETAIL



Dimensions: 13/16" x 2-1/4"



ADDITIONAL CONTROL OPTIONS


AWNS Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing. DA and DSR Drivers only.

SPECIFICATIONS	
TYPE	Radio Frequency
MOUNTING HEIGHT	8' – 12'
DETECTION ANGLE	360°
TEMPERATURE RANGE	0° to 55°C
RELATIVE HUMIDITY	0 to 90%, non-condensing
COMMISSIONING	Clear Connect gateway – Type X with app (iOS or Android)
MANUFACTURER	Lutron



SENSOR COVERAGE PATTERNS

9' height: ø12' coverage

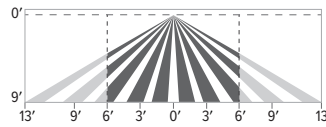

Motion Sensor Coverage

CEILING HEIGHT	COVERAGE AREA (SQ FT)
8'	114
9'	144
10'	178
12'	256

SENSOR DETAIL



Dimensions: ø1-1/8"

ATHENA CONTROL OPTIONS

CATALOG NUMBER	DESCRIPTION
AWNDR	Lutron Athena wireless node integral fixture control, RF only, for use with D4i DALI-2 or driver with 12V auxiliary power.
AWNS	Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing, for use with D4i DALI-2 or driver with 12V auxiliary power.
AWNDR-BL	Lutron Athena wireless node integral fixture control, RF only, for use with D4i DALI-2 or driver with 12V auxiliary power, black finish.
AWNS-BL	Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing, for use with D4i DALI-2 or driver with 12V auxiliary power, black finish.

OCCWS-FSP-311-L_-120/277 Wattstopper PIR motion and daylight sensor, 120/277. Must specify lens: L2, L3, or L7. Factory installed.


OCCWS-FSP-211-L_-120/277 Wattstopper PIR motion and daylight sensor, 120/277. Must specify lens: L2, L3, or L7. Factory installed.

FSIR-100 Remote controller for 211 sensor. Please specify quantity required per project. Ordered and shipped separately.



SPECIFICATIONS	
TYPE	PIR Motion + Daylight
MOUNTING HEIGHT	8' – 40'
DETECTION ANGLE	360°
TEMPERATURE RANGE	-40° to 75°C
COMMISSIONING	311 Sensor: App (iOS or Android) 211 Sensor: FSIR-100 Remote

SENSOR COVERAGE PATTERNS



L2 8' height: ø48' coverage




L3 20' height: ø40' coverage



L7 40' height: ø100' coverage



SENSOR DETAIL



Dimensions
L2/L3: ø2-3/8" | L7: ø3-1/4"


OCCWS-FS-505-PP-___ Wattstopper low voltage ultrasonic motion sensor with power pack. Must specify voltage: 120, 277, or 347V.

SPECIFICATIONS	
TYPE	Ultrasonic Motion
MOUNTING HEIGHT	8' – 10'
DETECTION ANGLE	360°
TEMPERATURE RANGE	0° to 55°C
RELATIVE HUMIDITY	5 to 95%, non-condensing


SENSOR COVERAGE PATTERNS

8' height: ø27' coverage

20° from vertical



Parallel to floor



SENSOR DETAIL

