



# LRX4 LED QuickShip 4" Wide Linear Recessed

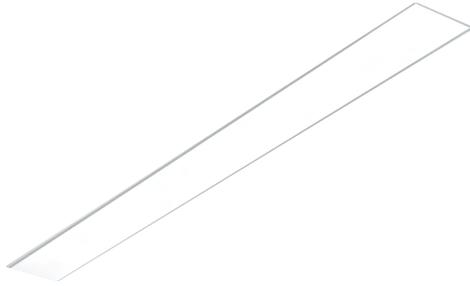

CATALOG #:

TYPE:

PROJECT:



## FEATURES

- Ready to ship in 48 hours with on-hand inventory to support immediate job requirements
- Easy to install and service with long-lasting performance
- Sleek design incorporates clean lines, slim styling, and diffused matte acrylic lens
- Attractive source of direct lighting for use in offices, hallways, conference rooms or common areas
- Lift and shift lens allows easy access to internal components
- High-performance up to up to 122 lm/W
- Quick-wire knockouts in back of fixture housing for easy attachment of incoming power supply
- All parts painted after fabrication to provide safe installation without gloves
- Made Right Here® in the USA

## ORDERING INFO

CATALOG NUMBER	FIXTURE STYLE	LENGTH	LUMENS	CRI	CCT	FIXTURE TYPE	SHIELDING	DRIVER	VOLTAGE	UPC CODE
LRX4G-4-L8/835-S-DMA-QS-DIM-UNV	15/16" or 1" grid	4'	800lm per foot	80	3500K	Stand-alone	Diffuse matte acrylic lens, .080" thick	Dimming driver, 0-10V	120-277V	850047638960

ACCESSORY CATALOG NUMBER	DESCRIPTION	UPC CODE
EM/10W KIT-NC-QS	10-watt emergency battery kit, no conduit <sup>[1]</sup>	850047638670

## SPECIFICATIONS

- HOUSING – 22-gauge die-formed, C.R.S.
- SHIELDING – Lift-and-shift flat diffuse matte acrylic, .080" thick.
- FINISH – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL – High-quality mid-power LED boards. L70 >50,000 hours. 50/60 Hz constant current driver.
- MOUNTING – NEMA Type "G" 15/16" or 1" grid standard.
- PACKAGING – One fixture per box, 72 per pallet.
- LISTINGS –
  - cCSAus certified as luminaire suitable for dry or damp locations.
  - IC-rated for direct contact with insulation
  - DesignLights Consortium qualified product. Not all versions of this product may be DLC qualified, see the DLC Qualified Products List at [designlights.org/QPL](http://designlights.org/QPL)
  - Build America, Buy America (BABA) and Buy American Act (BAA) compliant. Request certification at [hew.com/buy-american](http://hew.com/buy-american)
  - WARRANTY – 5-year limited warranty, see [hew.com/warranty](http://hew.com/warranty)

## NOTES

<sup>1</sup> Ships separately, field installed. CEC compliant. EM battery and test switch field installed in fixture.






## FIXTURE PERFORMANCE DATA

CATALOG NUMBER	CCT	PER FOOT		
		DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
LRX4G-4-L8/835-S-DMA-QS-DIM-UNV	3500K	815	6.7	122


## DISTRIBUTION CURVE




- Photometrics tested in accordance with IESNA LM-79. Results based on 80 CRI/3500K CCT, wattage for 120V input, and 25°C ambient temperature. Actual performance may vary +/-5%.
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.

## DIMENSIONS

### BACK VIEW

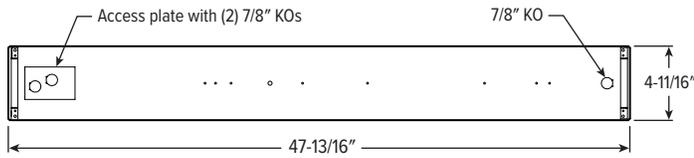

### ISO VIEW



## ACCESSORY DETAILS

### EMERGENCY BATTERY KIT

