




CATALOG #:

TYPE:

PROJECT:

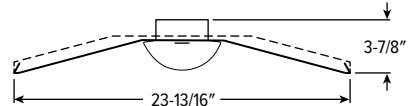

FEATURES

- Ready to ship in 48 hours with on-hand inventory to support immediate job requirements
- Easy to install and service with long-lasting performance
- Low-profile depth for shallow plenum
- Frosted acrylic lens provides smooth illumination for visual comfort
- Rated for direct contact with insulation
- ISO 5-9 and IP5X rated for cleanroom applications
- High-performance up to 136 lm/W
- Quick-wire access plate in back of fixture housing for easy attachment of incoming power supply
- All parts painted after fabrication to provide safe installation without gloves
- Made Right Here® in the USA

ORDERING INFO

CATALOG NUMBER	WIDTH	LENGTH	LUMENS	CRI	CCT	SHIELDING	DRIVER	VOLTAGE	UPC CODE
LT-22-L39/835-AF-QS-DIM-UNV	2'	2'	3,900lm	80	3500K	Frosted acrylic	Dimming driver, 0-10V	120-277V	850047638168
LT-22-L39/840-AF-QS-DIM-UNV	2'	2'	3,900lm		4000K				850047638175
LT-24-L40/835-AF-QS-DIM-UNV	2'	4'	4,000lm		3500K				850047638182
LT-24-L40/840-AF-QS-DIM-UNV	2'	4'	4,000lm		4000K				850047638199
LT-24-L64/835-AF-QS-DIM-UNV	2'	4'	6,400lm		3500K				850047638205
LT-24-L64/840-AF-QS-DIM-UNV	2'	4'	6,400lm		4000K				850047638212

ACCESSORY CATALOG NUMBER	DESCRIPTION	UPC CODE
EM/10W KIT-DC-QS	10-watt emergency battery kit, dual conduit ^[1]	850047638663

SPECIFICATIONS

- HOUSING/REFLECTOR – Precision die-formed 22-gauge C.R.S.
- SHIELDING – Frosted acrylic.
- FINISH – Highly reflective non-glare matte white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL – High-quality mid-power LED boards. L70 > 72,000 hours per IES TM-21.50/60 Hz constant current driver.
- MOUNTING – NEMA Type "G" 15/16" or 1" grid standard.
- PACKAGING – One fixture per box, (20) 2'x4' or (40) 2'x2' per pallet.
- LISTINGS –
 - cCSAus certified as luminaire suitable for dry or damp locations.
 - IC-rated for direct contact with insulation.
 - IP5X rated.
 - ISO 5-9 rated.
 - DesignLights Consortium qualified product. Not all versions of this product may be DLC qualified, see the DLC Qualified Products List at designlights.org/QPL
 - Build America, Buy America (BABA) and Buy American Act (BAA) compliant. Request certification at hew.com/buy-american
- WARRANTY – 5-year limited warranty, see hew.com/warranty

NOTES

¹ Ships separately, field installed. CEC compliant.



H.E. Williams, Inc.

Carthage, Missouri

www.hew.com

417-358-4065

Designed and Manufactured in the USA

Information contained herein is subject to change without notice.

REV.01/20/26.JL

Recessed

Page 1 of 2




Fixture Performance Data

Catalog Number	CCT	Delivered Lumens	Wattage	Efficacy (lm/W)
LT-22-L39/835-AF-QS-DIM-UNV	3500K	3934	33.1	119
LT-22-L39/840-AF-QS-DIM-UNV	4000K	4052	33.1	122
LT-24-L40/835-AF-QS-DIM-UNV	3500K	3972	32.0	124
LT-24-L40/840-AF-QS-DIM-UNV	4000K	4091	32.0	128
LT-24-L64/835-AF-QS-DIM-UNV	3500K	6396	48.5	132
LT-24-L64/840-AF-QS-DIM-UNV	4000K	6588	48.5	136

- Photometrics tested in accordance with IESNA LM-79. Results based on 80 CRI/3500K CCT, wattage for 120V input, and 25°C ambient temperature. Actual performance may vary +/-5%.
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.


Distribution Curve




Dimensions

2x4


Back View

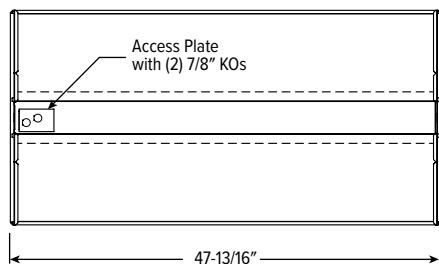

2x2

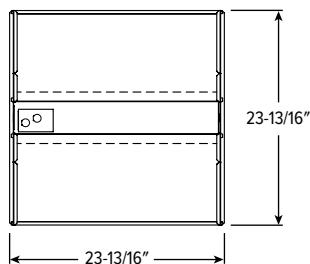

Side View



Accessory Details

EMERGENCY BATTERY KIT

