


# M6PR dim to **WARM** 6" MRI Shallow Plenum Downlight – Round

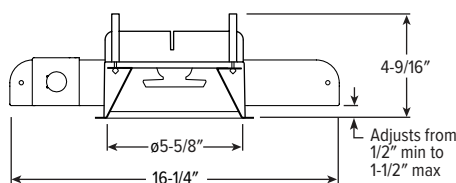

CATALOG #: \_\_\_\_\_

TYPE: \_\_\_\_\_

PROJECT: \_\_\_\_\_

ORDERING EXAMPLE: **M6PR - TL - L23/9DW - OPTIONS - LW - OF - WH - TRIM OPTIONS - N - F1M**



## HOUSING

SERIES	LUMENS <sup>[1]</sup>	COLOR	OPTIONS
<b>M6PR-TL</b>	<b>L8</b> 800lm	<b>9DW</b> Dim to warm (95 CRI, 1800K – 3000K)	<b>ATH</b> Airtight construction
TrimLock	<b>L14</b> 1,400lm		<b>CP</b> Chicago plenum (CCEA) <sup>[2]</sup>
	<b>L23</b> 2,300lm		

## TRIM <sup>[3]</sup>

TRIM TYPE	DISTRIBUTION <sup>[4]</sup>	FLANGE TYPE	REFLECTOR FINISH	TRIM OPTIONS
L Flush lens	<b>W</b> 85° Wide <b>M</b> 35° Medium <b>N</b> 25° Narrow	<b>OF</b> 1/2" standard flange <b>SF</b> 1/4" mud-in flange <sup>[5]</sup>	<b>CS</b> Clear semi-specular powder coat <b>WH</b> White texture powder coat <b>BL</b> Black texture powder coat	<b>IP</b> IP65 rated trim <b>AD</b> Diffuse acrylic lens <sup>[6]</sup> <b>PD</b> Diffuse 1/8" polycarbonate lens <sup>[7]</sup> <b>WET/CC</b> Wet location, covered ceiling listed <sup>[8]</sup> <b>AM</b> Anti-microbial <sup>[9]</sup>

## MOUNTING

### MOUNTING TYPE <sup>[10]</sup>

- N** Open pan for new construction
- I** IC-rated enclosure for new construction <sup>[12]</sup>

### MOUNTING HARDWARE <sup>[11]</sup>

- F1M** Factory-installed 2-position fixed pan bracket, universal bar hanger included <sup>[13]</sup>
- BA1M** Adjustable butterfly pan bracket, aluminum, bar hanger not included <sup>[14]</sup>
- CA1M** Adjustable caterpillar pan bracket, aluminum, universal bar hanger included <sup>[15]</sup>

## REMOTE DRIVER ENCLOSURE (ORDERED SEPARATELY) <sup>[16]</sup>

ORDERING EXAMPLE: **M6PR - RDBDW1 - L23 - OPTIONS - DIM1 - UNV**

SERIES	DRIVER BOX	DRIVER QTY.	LUMENS	OPTIONS	CONTROL <sup>[17]</sup>	VOLTAGE
<b>M6PR</b>	<b>RDBDW</b> Remote driver enclosure	<b>1</b> <b>7</b>	<b>L8</b> 800lm	<b>EM/10W</b> 10-watt emergency battery <sup>[18]</sup>	<b>DIM1</b> 1% dimming driver (0-10V signal to control dimming and CCT)	<b>UNV</b> 120-277V
		<b>2</b> <b>8</b>	<b>L14</b> 1,400lm	<b>F</b> Fuse kit		<b>347</b> 347V <sup>[21]</sup>
		<b>3</b> <b>9</b>	<b>L23</b> 2,300lm	<b>SDT</b> Stepdown transformer <sup>[19]</sup>	<b>LUT</b> Lutron Ecosystem enabled <sup>[20]</sup>	
		<b>4</b> <b>10</b>				
		<b>5</b> <b>11</b>				
		<b>6</b> <b>12</b>				

## NOTES

- Lumen output based on full light output, W distribution and WH finish, 3000K/95CRI. Actual lumens may vary +/-5%. See page 2 for FIXTURE PERFORMANCE DATA.
- I Mounting Type required.
- Trim ships separately.
- Beam angle based on WH reflector finish.
- For use with mud-in plaster construction only, supplied with mud flange installation kit. See page 3 for FLANGE TYPE DETAILS. Not available with ATH or IP options.
- Wide distribution only.
- Wide distribution only.
- Not available with PD trim option.
- WH and BL Reflector Finishes only.
- Mounting hardware required, ordered separately, see MOUNTING HARDWARE ordering info. See page 3 for MOUNTING TYPE DETAILS.

- See page 4 for MOUNTING HARDWARE DETAILS.
- L14 lumen package max.
- Universal bar hanger ships uninstalled.
- N Mounting Type only.
- N Mounting Type only.
- Required. Ordered as a separate catalog number, ships separately. See page 4 for REMOTE DRIVER ENCLOSURE DETAILS (ORDERED & SHIPPED SEPARATELY).
- All drivers dimmed by single control signal.
- Available with RDB1 only. Specify CEC in the option code when California Energy Commission regulations are required.
- May be required for 347V, see product builder at [hew.com/product-builder](http://hew.com/product-builder).
- Not available with I Mounting Type.
- Not available with EM batteries.



# M6PR dim to **WARM** 6" MRI Shallow Plenum Downlight – Round

## FEATURES

### TrimLock®


- Innovative TrimLock reflector retention system ensures trim remains flush with ceiling plane
- Mimic the comfortable, welcoming glow of incandescents with warm-dimming technology
- Designed with non-ferrous materials for MRI imaging suites
- IP65-rated die-cast trim includes easy-to-clean flush lens
- Slim 5" depth for minimal plenum space applications
- Beam angles ranging from 25° narrow to 85° wide for tailored performance
- Contemporary design provides glare-free illumination for a soft ceiling appearance
- Fully room-side accessible

## SPECIFICATIONS

- **HOUSING** – Spun housing with forged aluminum heat sink. Aluminum splice compartment. Trim housing adjusts for ceiling thickness from 1/2" - 1-1/2".
- **TRIMLOCK** – Innovative TrimLock reflector retention system ensures the trim remains flush with the ceiling plane.
- **LENSED TRIM** – Die-cast aluminum frame with micro-prismatic, acrylic lens.
- **ELECTRICAL** – High-performance Class 2 C.O.B. LED array. Modular quick-connect plug for easy field-connection of LED light assembly to driver. Reported L70>55,000 hours. Reported L90>55,000 hours. Estimated L70 = 200,000 hours. RF filter required, provided by others.
- **MOUNTING** – Recessed. Aluminum mounting pan for new construction or IC-rated enclosure. Remote mounted driver box must be located outside MRI room, RF filter required, provided by others.
- **LISTINGS** –
  - cCSAus conforms to UL STD 1598; Certified to CAN/CSA STD C22.2 No. 250.0 for damp locations. LED light assembly conforms to UL 2108 for remote installation.
  - Suitable for wet location under covered ceiling when specified with WET/CC option.
  - IC-rated for direct contact with insulation when specified with I Mounting Type.
  - City of Chicago Environmental Air approved when specified with CP option.
  - Complies with ASTM-E283 when specified with ATH option.
  - RoHS compliant.
  - Complies with the Buy American Act and other federal regulations. Request certification at [hew.com/baa](http://hew.com/baa).
- **WARRANTY** – 5-year limited warranty, see [hew.com/warranty](http://hew.com/warranty).

## FIXTURE PERFORMANCE DATA

	DISTRIBUTION	DELIVERED LUMENS	CCT AT 100% (FULL OUTPUT)	CCT AT 1% (FULL DIM)	WATTAGE	EFFICACY (lm/W)
L8	W	806	3000K	1800K	14.0	58
	M	817			14.0	58
	N	825			14.0	59
L14	W	1413			23.4	60
	M	1433			23.4	61
	N	1446			23.4	62
L23	W	2314			37.7	61
	M	2347			37.7	62
	N	2369			37.7	63




## MULTIPLIER TABLE

TRIM	
CATALOG NUMBER	CONVERSION FACTOR
AD	0.85
PD	0.85

- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Wattage shown is based on 120V input.
- Results based on 3000K, 95 CRI, full output, actual lumens may vary +/-5%
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.
- Use multiplier table to calculate additional options.

## PHOTOMETRY


**M6PR-L23/9DW-DIM1-UNV-LW-OF-WH** Total Luminaire Output: 2314 lumens; 37.7 Watts | Efficacy: 61.4 lm/W | 95.0 CRI; 3000K CCT



CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE	ZONAL LUMENS
		0°	
	0	1225	
	5	1203	114
	15	1127	318
	25	1036	477
	35	901	557
	45	582	442
	55	233	218
	65	116	117
	75	53	57
	85	12	15
	90	1	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 40	1466	63
	0 - 60	2126	92
	0 - 90	2314	100
	0 - 180	2314	100

**M6PR-L23/9DW-DIM1-UNV-LM-OF-WH** Total Luminaire Output: 2347 lumens; 37.7 Watts | Efficacy: 62.3 lm/W | 95.0 CRI; 3000K CCT



CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE	ZONAL LUMENS
		0°	
	0	5398	
	5	5188	476
	15	3397	913
	25	1074	512
	35	319	209
	45	140	110
	55	73	66
	65	37	37
	75	18	19
	85	3	4
	90	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 40	2110	90
	0 - 60	2286	97
	0 - 90	2347	100
	0 - 180	2347	100



H.E. Williams, Inc.

Carthage, Missouri

[www.hew.com](http://www.hew.com)

417-358-4065

Designed and Manufactured in the USA

Information contained herein is subject to change without notice.

REV.06/08/23.LA


Downlights

Page 2 of 4

# M6PR dim to WARM

## 6" MRI Shallow Plenum Downlight – Round


M6PR-L23/9DW-DIM1-UNV-LN-OF-WH Total Luminaire Output: 2369 lumens; 37.7 Watts | Efficacy: 62.8 lm/W | 95.0 CRI; 3000K CCT

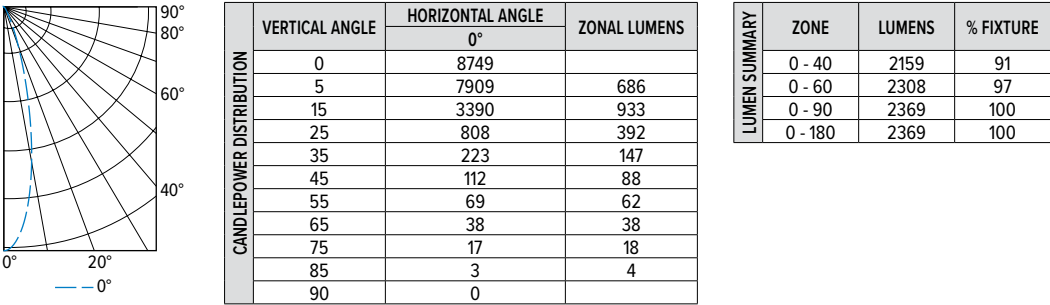

### TRIMLOCK DETAILS




### FLANGE TYPE DETAILS

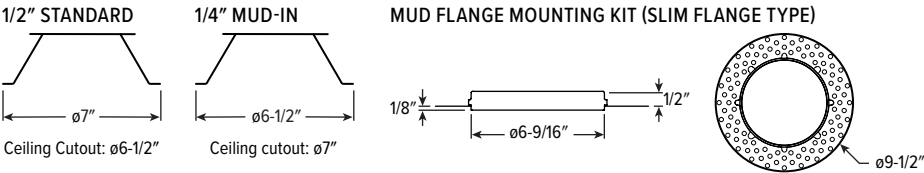

### REFLECTOR FINISH DETAILS




### MOUNTING TYPE DETAILS

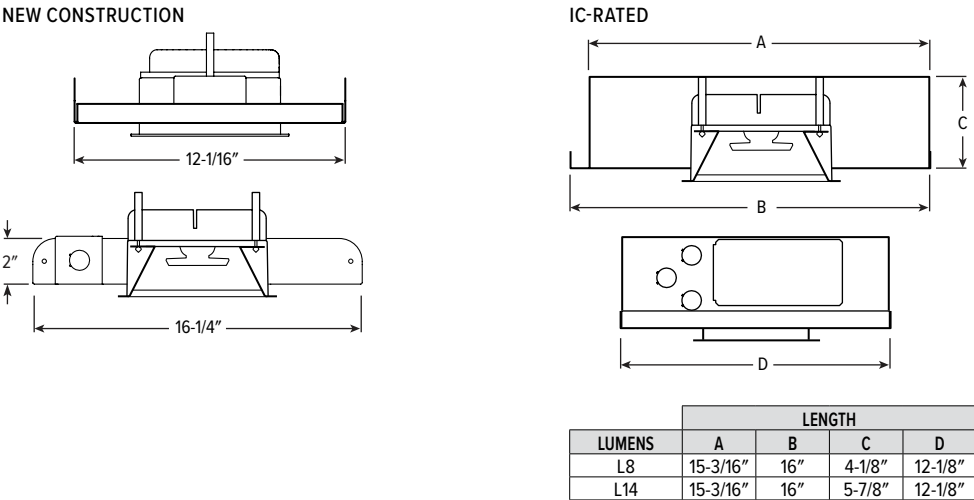


# M6PR dim to WARM 6" MRI Shallow Plenum Downlight – Round

## MOUNTING HARDWARE DETAILS


**F1M** Factory-installed 2-position fixed pan bracket, universal bar hanger included

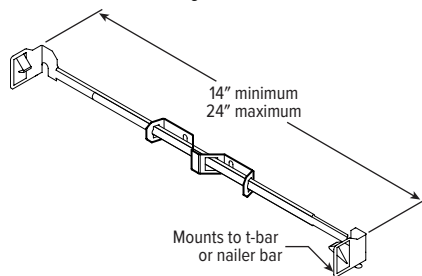

**BA1M** Adjustable butterfly pan bracket, aluminum, bar hanger not included (N Mounting Type only)




**CA1M** Adjustable caterpillar pan bracket, aluminum, universal bar hanger included (N Mounting Type only)

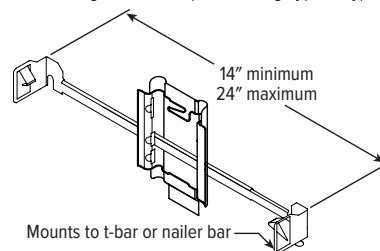


## REMOTE DRIVER ENCLOSURE DETAILS (ORDERED & SHIPPED SEPARATELY)


**REMOTE DRIVER ENCLOSURE FOR SINGLE FIXTURE**



**REMOTE DRIVER ENCLOSURE FOR SINGLE FIXTURE WITH EMERGENCY BATTERY**

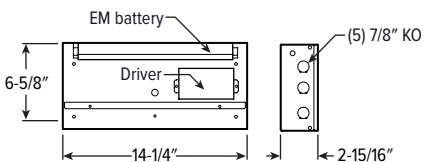

**REMOTE DRIVER ENCLOSURE FOR 2 - 8 FIXTURES**

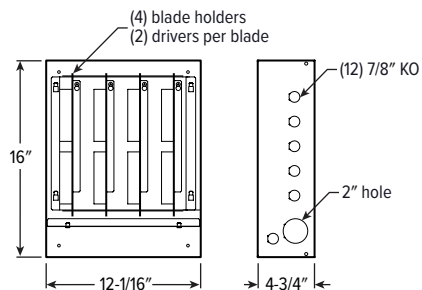

**REMOTE DRIVER ENCLOSURE FOR 9 - 12 FIXTURES**

