

CATALOG #: _____

Type: _____

PROJECT: _____



FEATURES

- Support human-centric design with adaptive, individualized lighting using tunable white light
- Designed for use in pairs to asymmetrically illuminate patient beds
- Fixtures can be installed to allow maintenance access without working directly over patient beds
- Optional low-voltage controller allows for bedside lighting control
- Provides varying levels of illumination through dimming driver
- Anti-microbial white finish standard
- Made Right Here® in the USA

SPECIFICATIONS

- HOUSING** – 22-gauge die-formed C.R.S.
- DOOR FRAME** – Steel door frame with integral torsion springs to secure the frame within the fixture.
- SHIELDING** – Frosted, ribbed acrylic.
- FINISH** – Textured 92% minimum average reflective white anti-microbial powder coating bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL** – High-quality mid-power LED board. L70 > 60,000 hours per IES TM-21. Tunable White products use LEDs of multiple CCTs and may produce a perceptibly different shade of white from single-CCT products at the same CCT. All CCTs are within 3 MacAdam ellipses.
- MOUNTING** – NEMA Type “G” 1” grid ceiling standard. For NEMA Type “NFG” and “SG” 9/16” grid installations, specify EQCLIPS option. Drywall flange kit available, shipped separately, see options. Fixture must be installed prior to Drywall Kit.
- LISTINGS** –
 - cCSAus certified as luminaire suitable for dry or damp locations.
 - Complies with the Buy American Act and other federal regulations. Request certification at hew.com/baa.
- WARRANTY** – 5-year limited warranty, see hew.com/warranty.

ORDERING EXAMPLE: MD2 G - 4 - L30/8TW - A - OPTIONS - DALI - UNV

ORDERING INFO

SERIES	CEILING TYPE	LENGTH	LUMENS ⁽¹⁾	CRI	CCT
MD2	G 9/16”, 15/16”, or 1” grid ⁽²⁾	4 4’	L30 3,000lm	8 80	TW Tunable white (3000K-5000K)
				9 90	TW2 Tunable white (2700K-6500K)

SHIELDING

- A** Curved frosted ribbed acrylic
- A/CHA118** Curved frosted ribbed acrylic with clear, high temperature non-prismatic lens
- A/PC118** Curved frosted ribbed acrylic with clear polycarbonate lens

OPTIONS

- EM/10W** 10-watt emergency battery
- GLR** Fuse, fast blow ⁽³⁾
- EQCLIPS** Earthquake clips ⁽⁴⁾
- LVC1** 1-circuit low-voltage controller, wired for Ambient ⁽⁵⁾
- LVC3DIM** 1-circuit dimming low-voltage controller ⁽⁶⁾
- SG** Single closed-cell foam gasketing ⁽⁷⁾
- DFK-0648AMW** Drywall kit, 6” x 48”, anti-microbial white ⁽⁸⁾

CONTROL

- See page 3 for CONTROL DETAILS.
- DALI** Driver prewired for DALI applications
- DIM** Dimming driver with (1) 0-10V signal to control dimming and (1) 0-10V signal to control CCT
- DMX** Driver prewired for DMX applications
- LD2** Lutron DALI-2 digital driver, 1%

VOLTAGE

- 120 120V
- 277 277V
- UNV 120-277V

NOTES

- Lumen output based on A Shielding, 80 CRI/4000K CCT. Actual performance may vary +/-5%, see page 2 for FIXTURE PERFORMANCE DATA.
- Must specify EQCLIPS option when 9/16” grid mounting.
- Specify voltage. Requires one per driver.
- 2 per fixture. Optional for 1” grid installations. Required for 9/16” grid mounting.
- 120V or 277V only. Not dimming compatible. LVC wall plate accessories available, see hew.com for details.
- 120V or 277V only. DIM driver only. LVC wall plate accessories available, see hew.com for details.
- Field installed.
- See page 3 for DRYWALL KIT (DFK) OPTIONS. Fixture must be installed prior to Drywall Kit (DFK).



MD2 tunable WHITE Asymmetric Medical Bed Light



FIXTURE PERFORMANCE DATA

LED PACKAGE	A			A/CHA118		
	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
L30	3049	33.1	92	2862	33.1	86

MULTIPLIER TABLE


CCT	COLOR TEMPERATURE			
	TW		TW2	
	LUMENS	WATTAGE	LUMENS	WATTAGE
2700K	—	—	0.93	1.02
3000K	0.95	1.04	0.95	1.01
3500K	0.98	1.02	0.98	1.00
4000K	1.00	1.00	1.00	1.00
5000K	0.96	1.04	1.02	1.00
6500K	—	—	1.01	1.04

- Photometrics tested in accordance with IESNA LM-79. Results based on A shielding, 80 CRI/4000K CCT, average wattage for 120V through 277V input, and 25°C ambient temperature. Actual performance may vary +/-5%.
- Use multiplier table to calculate additional options.



PHOTOMETRY


MD2G-4-L30/8TW-A-DALI Total Luminaire Output: 3049 lumens; 33.1 Watts | Efficacy: 92 lm/W | 80 CRI; 4000K CCT



VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
	0°	45°	90°	135°	180°	
0	1441	1441	1441	1441	1441	
5	1513	1476	1407	1348	1311	134
15	1555	1487	1310	1118	1030	374
25	1556	1471	1198	892	768	548
35	1370	1334	1011	667	550	615
45	957	1064	768	455	364	562
55	500	663	510	289	225	413
65	233	345	310	166	135	253
75	99	134	145	73	65	119
85	21	30	35	18	15	30
90	0	0	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1056	35
	0 - 40	1671	55
	0 - 60	2646	87
	0 - 90	3049	100
	0 - 180	3049	100

MD2G-4-L30/8TW-A-CHA118-DALI Total Luminaire Output: 2862 lumens; 33.1 Watts | Efficacy: 86 lm/W | 80 CRI; 4000K CCT




VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
	0°	45°	90°	135°	180°	
0	1366	1366	1366	1366	1366	
5	1434	1400	1340	1284	1254	128
15	1471	1409	1247	1073	991	356
25	1476	1394	1145	869	758	524
35	1303	1264	968	657	549	591
45	915	1006	737	455	374	541
55	466	614	480	290	232	391
65	197	296	277	157	130	226
75	65	93	108	57	51	89
85	11	14	15	10	10	16
90	0	0	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1008	35
	0 - 40	1599	56
	0 - 60	2531	88
	0 - 90	2862	100
	0 - 180	2862	100


FIXTURE DETAILS

BACKVIEW

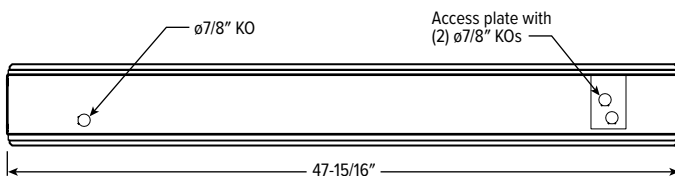

MD2 tunable WHITE Asymmetric Medical Bed Light

CONTROL DETAILS



DRYWALL KIT (DFK) OPTIONS

ORDERING INFO

EXAMPLE: DFK - 06 48 W			
SERIES	WIDTH	LENGTH	FINISH
DFK Drywall kit	06 6"	48 4'	W White AMW Anti-microbial white

INSTALLATION DIMENSIONS

NOMINAL SIZE	ROUGH-IN		FINISH TRIM SIZE	
	WIDTH (A)	LENGTH (C)	WIDTH (B)	LENGTH (D)
6" x 4'	6-3/8"	48-3/8"	7-5/16"	49-5/16"

TYPICAL INSTALLATION

Refer to table for dimensions.

