

CATALOG #: _____

Type: _____

PROJECT: _____

FEATURES

- Tunable white from 3000K to 5000K CCT, minimum 80 CRI
- Specify as a single fixture or in pairs to customize ambient, exam, and reading light output
- Illuminate exam surfaces asymmetrically when installed in pairs and meet IESNA guidelines
- Fixtures can be installed to allow maintenance access without working directly over patient beds
- Optional low-voltage controller allows for bedside lighting control
- Double-gasketed sani-shield protects fixture from dust, bugs and other contaminants while simplifying maintenance and cleaning
- Anti-microbial white finish standard
- Quick-wire access plate in back of fixture housing for easy attachment of incoming power supply
- Made Right Here® in the USA

SPECIFICATIONS

- HOUSING** – 20-gauge die-formed and welded C.R.S.
- DOOR FRAME** – .050" extruded regressed aluminum frame with curved diffuse acrylic lens and clear acrylic sani-shield. Fully enclosed spring-loaded cam latches
- SHIELDING** – Internal curved diffuse ribbed acrylic with external clear, non-prismatic sani-shield lens
- FINISH** – 92% minimum average reflective white anti-microbial powder coat, bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL** – High quality mid-power LED board. L70 > 50,000 hours per IES TM-21. Tunable White products use LEDs of multiple CCTs and may produce a perceptibly different shade of white from single-CCT products at the same CCT. All CCTs are within 3 MacAdam ellipses.
- MOUNTING** – Designed for NEMA Type "G" 1" grid ceiling standard. For NEMA Type "NFG" and "SG" 9/16" grid installations, specify EQCLIPS option. Drywall kit (DFK) options available for flange applications, shipped separately.
- LISTINGS** –
 - cCSAus certified as luminaire suitable for dry or damp locations.
- WARRANTY** – 5-year limited warranty, see hew.com/warranty.

ORDERING EXAMPLE: MD 4+4AE G - 4 - L40/L100/8TW - A - OPTIONS - DALI - UNV

ORDERING INFO

SERIES	STYLE	CEILING TYPE ^[1]	LENGTH	LUMENS ^[2]	COLOR	SHIELDING
MD	See table below	G NEMA Type "G", "SG", and "NFG"	4 4'	See table below	8TW Tunable white (80 CRI, 3000K-5000K)	A Curved diffuse ribbed acrylic with clear, acrylic lens

OPTIONS ^[3]

EM/10W	10-watt emergency battery
GLR	Fuse, fast blow ^[5]
EQCLIPS	Earthquake clips ^[6]
TG	Triple gasket ^[7]
DFK-0848AMW	Drywall kit, 8" x 48", anti-microbial white ^[8]

CONTROL ^[4]

DALI	Driver prewired for DALI applications
DIM	Dimming driver with (1) 0-10V signal to control dimming and (1) 0-10V signal to control CCT
DMX	Driver prewired for DMX applications
PSQ	Lutron T-Series 2-channel tunable white 1%.

VOLTAGE

120	120V
277	277V
UNV	120-277V

CONFIGURATIONS

STYLE	DESCRIPTION	AMBIENT LUMENS	EXAM LUMENS	READING LUMENS	CONFIGURATION
4A	Single fixture, ambient only	L45 5,500	—	—	
4AR_	Single fixture, ambient & reading Specify fixture direction: L for Left and R for Right			900	
4AE	Single fixture, ambient & exam	L20 2,000	L50 5,000	—	
4AER_	Single fixture, ambient, exam & reading Specify fixture direction: L for Left and R for Right			900	
4+4A	Pair of fixtures, ambient only	L90 9,000	—	—	
4+4AR	Pair of fixtures, ambient & reading			1,900	
4+4AE	Pair of fixtures, ambient & exam	L40 4,000	L100 10,000	—	
4+4AER	Pair of fixtures, ambient, exam & reading			1,900	

NOTES

- When using in NEMA Type "SG" or "NFG" applications, must specify EQCLIPS option. For flange installations use the Drywall Kit (DFK), see OPTIONS.
- Lumens based on 4000 CCT. Actual lumens may vary +/-5%. See page 2 for FIXTURE PERFORMANCE DATA.
- Low-voltage controllers available, see page 3 for LOW-VOLTAGE CONTROLLER.
- See page 4 for CONTROL DETAILS.
- Specify voltage, one fuse required per driver.
- 2 clips per fixture. Optional for 1" grid installations. Required for 9/16" grid mounting.
- Field-installed, see page 3 for GASKETING DETAILS.
- Fixture must be installed prior to Drywall Kit (DFK). Must be ordered separately.




FIXTURE PERFORMANCE DATA

	STYLE	LED PACKAGE	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)	SYSTEM WATTAGE	SYSTEM EFFICACY
MD4A	A	L45	4,552	52.8	86.2	52.8	86.2
	R	—	931	10.6	88.1	—	—
MD4+4A	A	L90	9,104	105.7	86.2	105.7	86.2
	R	—	1,863	21.1	88.3	—	—
MD4AE	A	L20/L50	2,027	25.0	81.1	79.6	88.8
	E		5,041	54.6	92.3		
	R	—	931	10.6	88.1	—	—
MD4+4AE	A	L40/L100	4,054	50.0	81.1	159.7	88.5
	E		10,083	109.7	91.9		
	R	—	1,863	21.1	88.3	—	—

- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Wattage shown is average for 120V through 277V input.
- Results based on 4000K, 80 CRI, actual lumens may vary +/-5%
- Use multiplier table to calculate additional options.
- When specifying fixtures with Reading compartment, add R wattage to system wattage to find total fixture wattage.


MULTIPLIER TABLES

CCT	CONVERSION FACTOR	
	LUMENS	WATTAGE
3000K	0.95	1.04
3500K	0.98	1.02
4000K	1.00	1.00
5000K	0.96	1.04



PHOTOMETRY


MD4AEG-4-L20/L50/8TW-A-DALI-UNV Ambient only Total Luminaire Output: 2027 lumens; 25 Watts | Efficacy: 81 lm/W | 80 CRI; 4000K CCT



VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
	0°	45°	90°	135°	180°	
0	1052	1052	1052	1052	1052	
5	1034	1053	1068	1046	1037	100
15	950	1003	1035	984	961	280
25	776	886	935	860	793	397
35	575	722	791	655	568	426
45	402	527	584	432	354	373
55	258	340	361	229	187	266
65	107	174	190	96	58	140
75	25	43	69	13	11	42
85	0	2	5	1	1	4
90	0	0	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	776	38
	0 - 60	1841	91
	0 - 90	2027	100
	0 - 180	2027	100


MD4AEG-4-L20/L50/8TW-A-DALI-UNV Exam only Total Luminaire Output: 5041 lumens; 54.6 Watts | Efficacy: 92 lm/W | 80 CRI; 4000K CCT



VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
	0°	45°	90°	135°	180°	
0	1937	1937	1937	1937	1937	
5	2076	2046	1964	1783	1843	183
15	2300	2211	1909	1480	1467	525
25	2413	2258	1765	1156	1082	797
35	2376	2176	1527	884	776	965
45	2167	1912	1231	636	533	993
55	1684	1483	844	400	363	851
65	827	929	478	212	180	535
75	171	278	164	53	52	180
85	0	3	3	2	3	13
90	0	0	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1506	30
	0 - 60	4314	86
	0 - 90	5041	100
	0 - 180	5041	100

MD4AEG-4-L20/L50/8TW-A-DALI-UNV Ambient & Exam Total Luminaire Output: 7068 lumens; 79.6 Watts | Efficacy: 89 lm/W | 80 CRI; 4000K CCT




VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
	0°	45°	90°	135°	180°	
0	2989	2989	2989	2989	2989	
5	3111	3099	3032	2829	2880	283
15	3251	3214	2944	2464	2428	805
25	3189	3145	2700	2016	1875	1194
35	2951	2897	2318	1539	1343	1391
45	2569	2439	1814	1068	887	1366
55	1942	1823	1205	629	550	1117
65	935	1103	667	307	238	675
75	196	321	233	66	62	221
85	0	4	8	3	4	17
90	0	0	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	2282	32
	0 - 60	6155	87
	0 - 90	7068	100
	0 - 180	7068	100



MD4 tunable WHITE Architectural Multi-Function Medical

MD4AERRG-4-L20/L50/8TW-A-DALI-UNV Reading Only Total Luminaire Output: 931 lumens; 10.6 Watts | Efficacy: 88 lm/W | 80 CRI; 4000K CCT

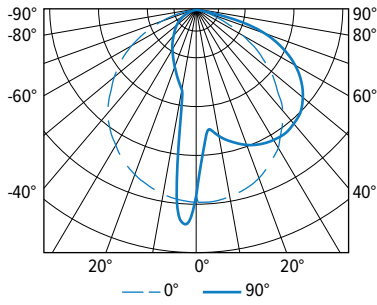

VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
	0°	45°	90°	135°	180°	
0	472	472	472	472	472	
5	312	344	490	577	524	40
15	348	323	474	218	182	92
25	378	349	436	175	138	130
35	388	347	377	135	107	160
45	373	308	293	101	79	170
55	328	266	199	69	57	157
65	251	192	98	41	35	118
75	120	94	27	17	14	57
85	2	2	0	2	2	6
90	0	0	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 40	423	45
	0 - 60	750	81
	0 - 90	931	100
	0 - 180	931	100

LOW-VOLTAGE CONTROLLER


LVC wall plate accessories available, see hew.com for details.

EXAMPLE: LVC2A/E			
CONTROLLER	LOAD 1	LOAD 2	LOAD 3
LVC1 1-circuit	A Ambient R Reading E Exam		
LVC2 2-circuit	A/ Ambient R/ Reading	R Reading E Exam	
LVC3 3-circuit or dimming control	A/ Ambient R/ Reading DIMA/ Ambient, 0-10 dimming ¹ DIMR/ Reading, 0-10 dimming ¹	A/ Ambient R/ Reading E/ Exam	E Exam
	DIMA/DIMR Ambient and reading, 0-10 dimming ¹ SEQAR/ Ambient and reading, sequential switching ²		

Bedside switch used to control dimming only, color tuning performed by alternate 0-10V control source. DIM only, 120V or 277V only.

- ¹ Smooth dimming of the load utilizing a single, dry contact, momentary, normally open switch which will dim from 25% up to 100% while holding down the switch.
- ² Alternating off and on of (2) loads with multiple cycles of one switch.


FIXTURE DETAILS

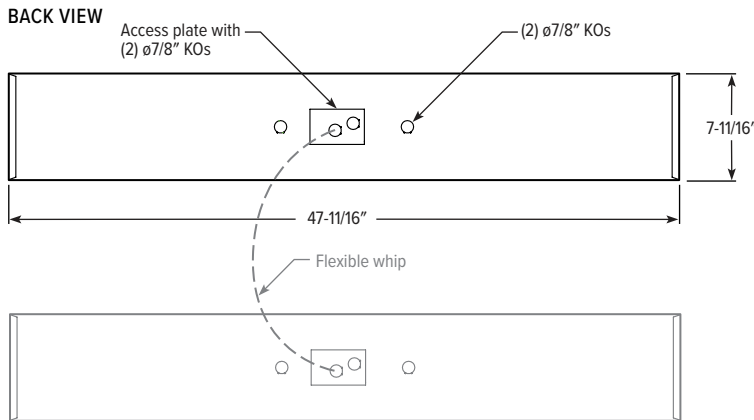

4 + 4 combinations supplied with 9' master/satellite flexible whip between fixtures.


GASKETING DETAILS

DOUBLE GASKETING (STANDARD)



Gasketing is factory-installed continuously between door frame and luminaire housing; and between door frame and lens.

TRIPLE GASKETING (TG)



Gasketing is factory-installed continuously between door frame and luminaire housing; and between door frame and lens. Gasketing between bottom perimeter of unit (adjacent to T-bar or hardpan ceiling) is provided by factory and field installed.



MD4 tunable WHITE Architectural Multi-Function Medical

CONTROL DETAILS

DIM



DALI



DMX



LUTRON T-SERIES

