

End View
Ambient (DI shown)

CATALOG #: _____

Type: _____

PROJECT: _____

FEATURES

- Choose between two attractive ambient styles
- Select ambient, exam and reading light output among two configurations
- Protect against contaminants with the easy-to-clean, lensed door
- Ambient compartment is designed to incorporate Williams' popular DI or HET styles
- Exam compartment is available with a variety of lens or louver options
- Anti-microbial white finish standard
- Fully gasketed door frame minimizes contaminants
- Optional low-voltage controller allows for bedside lighting control
- Highly reflective matte white paint increases efficiency
- Made Right Here® in the USA

SPECIFICATIONS

- HOUSING** – 20-gauge die-formed, welded C.R.S.
- DOOR FRAME & LENS** – Transparent acrylic lens, .080" thick, mounted in .050" thick extruded aluminum door frame, flat with mitered corners.
- REFLECTOR** – Precision die-formed metal with highly reflective, non-glare matte white polyester powder coated finish.
- FINISH** – 92% minimum average reflective white anti-microbial powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL** – High quality mid-power LED boards. L70 >50,000 hours.
- MOUNTING** – NEMA Type "G" standard. Surface mount available. Earthquake clips included. Flange installation available, shipped separately: see page 5 for DRYWALL KIT (DFK) OPTIONS
- LISTINGS** –
 - cCSAus certified as luminaire suitable for dry or damp locations.
 - City of Chicago Environmental Air approved when specified with CP option.
- WARRANTY** – 5-year limited warranty, see hew.com/warranty.

ORDERING EXAMPLE: MDB AER G - HET - L44/840 - A/SAPL15/W - FA - OPTIONS - DRV - UNV

ORDERING INFO

SERIES	STYLE	CEILING TYPE ^[1]	AMBIENT STYLE ^[2]	LUMENS ^[3]	CRI/CCT
MDB	AE Ambient and exam	G NEMA Type "G"	DI Direct/indirect	Specified for ambient compartment only. See table below for lumens.	80 CRI
	AER Ambient, exam, and reading	S Surface Mount	HET High efficiency troffer		835 3500K
					840 4000K
					90 CRI ^[4]
					940 4000K
					950 5000K

SHIELDING

AMBIENT

- AD Acrylic ^[6]
- WPR White perforated round ^[7]
- A Frosted, ribbed acrylic ^[8]

EXAM

- AF12125 Frosted acrylic, pattern #12, .125" thick
- AF19156 Frosted acrylic, pattern #19, .156" thick
- SAPL15 Semi-specular aluminum parabolic louver, 1-1/2" deep with matte white acrylic overlay ^[9]
- WAPL15 White aluminum parabolic louver, 1-1/2" deep with matte white acrylic overlay ^[10]

READING ^[11]

- S Semi-specular
- W White

LENS

- FA Flat aluminum door frame, clear, non-prismatic acrylic, .080" thick
- FP Flat aluminum door frame, clear, non-prismatic polycarbonate lens, .080" thick

OPTIONS ^[5]

- EM/10W 10-watt emergency battery ^[12]
- GLR Fuse, fast blow ^[13]
- NL Night light ^[14]
- CP Chicago Plenum (CCEA)

CONTROL

CONTROL	VOLTAGE
DRV Non-dimming driver	120 120V
	277 277V
	UNV 120-277V
	347 347V ^[15]

CONFIGURATIONS

STYLE	CONFIGURATION	AMBIENT LUMENS	EXAM LUMENS	READING LUMENS			
AE ^[16]	<table border="1"> <tr> <td>A</td> <td>E</td> </tr> </table>	A	E	L27 2,700	7,800	—	
		A	E				
L44 4,400							
AER	<table border="1"> <tr> <td>R →</td> <td>A</td> <td>E</td> </tr> </table>	R →	A	E	L27 2,700	7,800	1,600
		R →	A	E			
L44 4,400							

NOTES

- See page 5 for DRYWALL KIT (DFK) OPTIONS.
- See page 3 for CROSS SECTIONS.
- Lumen output based on 4000 CCT. Actual lumens may vary +/-5%. See page 2 for FIXTURE PERFORMANCE DATA.
- Extended lead times may apply. Consult factory for availability.
- See page 4 for LOW-VOLTAGE CONTROLLER.
- DI Ambient Style only.
- DI Ambient Style only.
- HET Ambient Style only.
- AER Style only.
- AER Style only.
- Specify Shielding for Reading only when AER style is specified.
- Ambient compartment only.
- Specify voltage, 1 per driver.
- Must specify 120V or 277V. See page 4 for FIXTURE DETAILS.
- Not available with EM batteries.
- Not available with SAPL or WAPL Shielding



FIXTURE PERFORMANCE DATA

STYLE	LED PACKAGE	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)	SYSTEM WATTAGE TOTAL				SYSTEM EFFICACY TOTAL				SHIELDING MULTIPLIERS				
					AE	AER	AEN	AERN	AE	AER	AEN	AERN	WPR	A19156	WAPL15	FP	
A	DIAD	L27	2741	21.7	126.3	86.2	106.7	92.6	113.1	122.7	114.5	121.1	113.7	1.00	—	—	0.94
		L44	4403	33.9	129.9	98.4	118.9	104.8	125.3	124.4	116.8	122.9	115.9	1.00	—	—	
E	AF12125	—	7837	64.5	121.5	—	—	—	—	—	—	—	—	0.98	—		
A	DIAD	L27	2741	21.7	126.3	86.2	106.7	92.6	113.1	110.9	105.0	110.1	104.7	0.78	—	—	
		L44	4403	33.9	129.9	98.4	118.9	104.8	125.3	114.0	108.2	113.2	107.8	0.78	—	—	
E	SAPL15	—	6818	64.5	105.7	—	—	—	—	—	—	—	—	—	1.05		
A	HET	L27	2549	21.7	117.5	86.2	106.7	92.6	113.1	120.5	112.7	119.1	112.0	—	—	—	
		L44	4095	33.9	120.8	98.4	118.9	104.8	125.3	121.3	114.2	120.0	113.4	—	—	—	
E	AF12125	—	7837	64.5	121.5	—	—	—	—	—	—	—	—	0.98	—		
A	HET	L27	2549	21.7	117.5	86.2	106.7	92.6	113.1	108.7	103.2	108.1	103.0	—	—	—	
		L44	4095	33.9	120.8	98.4	118.9	104.8	125.3	110.9	105.6	110.2	105.3	—	—	—	
E	SAPL15	—	6818	64.5	105.7	—	—	—	—	—	—	—	—	—	1.05		
R	AF12125	—	1646	20.5	—	—	—	—	—	—	—	—	—	—	—		
NL	AF12125	—	640	6.4	—	—	—	—	—	—	—	—	—	—	—		


MULTIPLIER TABLE

CRI	COLOR TEMPERATURE	
	CCT	CONVERSION FACTOR
80 CRI	3000K	0.96
	3500K	0.97
	4000K	1.00
90 CRI	4000K	0.83
	5000K	0.86

- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Wattage shown is average for 120V through 277V input.
- Results based on 4000K, 80 CRI, actual lumens may vary +/-5%
- Use multiplier table to calculate additional options.

PHOTOMETRY


MDBAERN-HET-L44/840-A/A12125-DIM-UNV ALL ON Total Luminaire Output: 14218 lumens; 113 Watts | Efficacy: 125.3 lm/W | 80 CRI; 4000K CCT



VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
	0°	45°	90°	135°	180°	
0	6376	6376	6376	6376	6376	
5	6293	6287	6309	6336	6340	599
15	5857	5893	5986	6066	6104	1685
25	5191	5197	5309	5403	5414	2444
35	4549	4421	4498	4579	4570	2802
45	3704	3502	3400	3412	3397	2667
55	2574	2495	2257	2281	2249	2105
65	1112	1461	1235	1290	1285	1285
75	420	441	454	495	531	530
85	71	62	73	75	82	102
90	0	0	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
0 - 30		4728	33
0 - 40		7529	53
0 - 60		12301	87
0 - 90		14218	100
0 - 180		14218	100

MDBAERN-HET-L44/840-A/A12125 EXAM Total Luminaire Output: 7837 lumens; 64.5 Watts | Efficacy: 122 lm/W | 80 CRI; 4000K CCT




VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
	0°	45°	90°	135°	180°	
0	3878	3878	3878	3878	3878	
5	3758	3758	3786	3819	3839	360
15	3416	3456	3563	3682	3742	1006
25	2885	2952	3112	3266	3316	1431
35	2243	2329	2546	2703	2749	1571
45	1613	1666	1862	1963	2007	1413
55	1015	1052	1202	1274	1316	1053
65	565	572	665	705	757	650
75	245	227	256	284	335	292
85	44	37	44	46	55	61
90	0	0	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
0 - 30		2797	36
0 - 40		4369	56
0 - 60		6835	87
0 - 90		7837	100
0 - 180		7837	100




MDBAERN-HET-L44/840-A/A12125 READING Total Luminaire Output: 1646 lumens; 20.5 Watts | Efficacy: 80 lm/W | 80 CRI; 4000K CCT

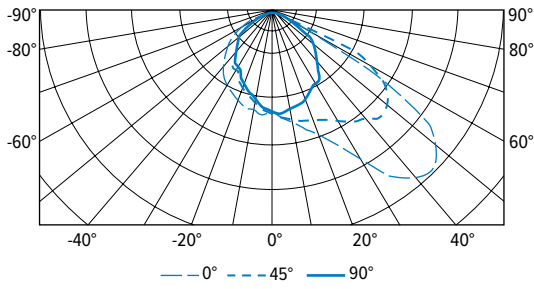

CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
		0°	45°	90°	135°	180°	
	0	460	460	460	460	460	
	5	490	489	476	457	445	44
	15	557	523	460	404	386	131
	25	664	555	422	352	334	211
	35	917	632	388	310	293	297
	45	1046	700	305	237	232	357
	55	871	659	233	181	167	342
	65	133	422	150	110	97	193
	75	13	39	62	44	41	60
	85	5	2	9	9	11	10
	90	0	0	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	386	24
	0 - 40	684	42
	0 - 60	1383	84
	0 - 90	1646	100
	0 - 180	1646	100


MDBAERN-HET-L44/840-A/A12125 NIGHT Total Luminaire Output: 640 lumens; 6.4 Watts | Efficacy: 100 lm/W | 80 CRI; 4000K CCT

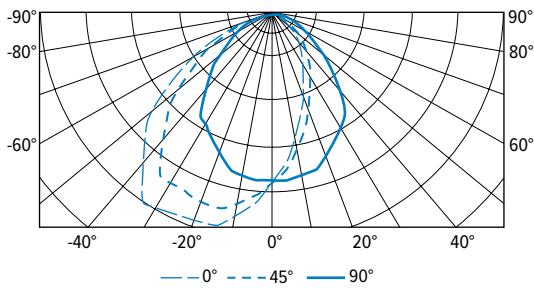

CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
		0°	45°	90°	135°	180°	
	0	265	265	265	265	265	
	5	240	249	266	290	300	25
	15	170	195	258	321	347	72
	25	114	138	229	317	354	106
	35	84	106	201	313	362	128
	45	55	66	138	239	292	120
	55	37	45	90	167	209	97
	65	22	29	53	94	121	62
	75	9	13	20	35	45	26
	85	1	1	1	2	2	4
	90	0	0	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	203	32
	0 - 40	331	52
	0 - 60	548	86
	0 - 90	640	100
	0 - 180	640	100


FOOTCANDLE ESTIMATOR & DISTRIBUTION

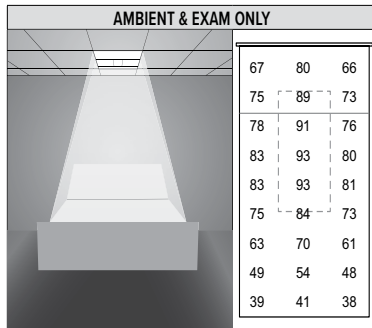

Footcandle calculations based on standard reflectance of 80/50/20 and a light loss factor of .85. Fixture centered over bed at 9' ceiling height, positioned 4' on center from wall. Values are for bed surface.


CROSS SECTIONS

EXAM AND READING SHOWN

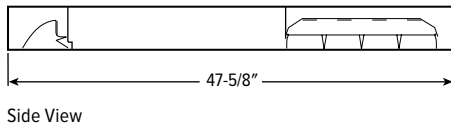


Side View

AMBIENT



End View

HET



End View




MDB LED Multi-Function Medical Bed Light

FIXTURE DETAILS


EXAMPLES OF CONFIGURATIONS: Styles must be specified in order: 1) Ambient 2) Exam 3) Reading

MDBAERG-DI

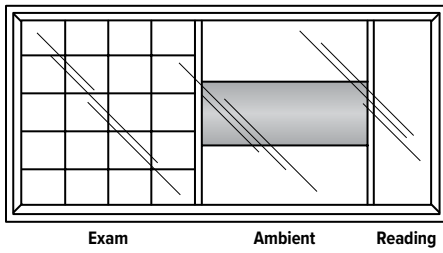


MDBAEG-HET


With A (Ambient) and AF12125 or AF19156 (Exam) shielding, no reading light

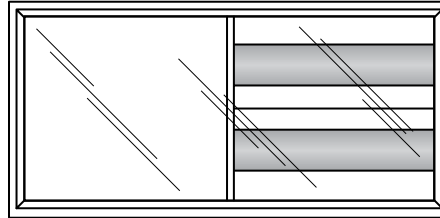

BACK VIEW

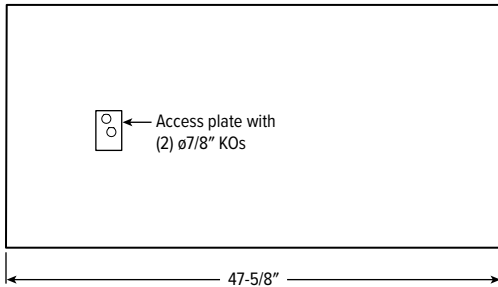

NL

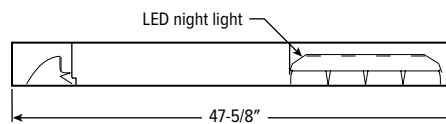

LOW-VOLTAGE CONTROLLER

LVC wall plate accessories available, see hew.com for details.


EXAMPLE: LVC3A/R/N				
CONTROLLER	LOAD 1	LOAD 2	LOAD 3	
LVC1 1-circuit	A Ambient N Night R Reading E Exam			
LVC2 2-circuit	A/ Ambient R/ Reading	A Ambient N Night R Reading E Exam		
LVC3 Dimming control	A/ Ambient R/ Reading DIMA/ Ambient, 0-10 dimming ¹ DIMR/ Reading, 0-10 dimming ¹	A/ Ambient N/ Night R/ Reading E/ Exam —	N Night E Exam	
	DIMA/DIMR/ Ambient and reading, 0-10 dimming ¹ SEQAR/ Ambient and reading, sequential switching ²			

120V or 277V only

¹ Smooth dimming of the load utilizing a single, dry contact, momentary, normally open switch which will dim from 25% up to 100% while holding down the switch.

² Alternating off and on of (2) loads with multiple cycles of one switch.

GASKETING DETAILS



Gasketing is factory-installed continuously between door frame and luminaire housing; and between door frame and lens. Gasketing between bottom perimeter of unit (adjacent to T-bar or hardpan ceiling) is provided by factory and field installed.




MDB LED Multi-Function Medical Bed Light

DRYWALL KIT (DFK) OPTIONS

ORDERING EXAMPLE: DFK - 24 48 W			
SERIES	WIDTH	LENGTH	FINISH
DFK Drywall Kit	See table below	See table below	W White AMW Anti-microbial white

TYPICAL INSTALLATION

Refer to table for dimensions.

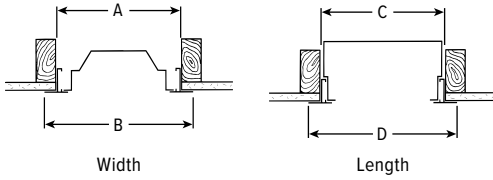

CATALOG NUMBER	NOMINAL SIZE	ROUGH-IN		FINISH TRIM SIZE	
		WIDTH (A)	LENGTH (C)	WIDTH (B)	LENGTH (D)
DFK-2448	2' x 4'	24-3/8"	48-3/8"	25-5/16"	49-5/16"